



SIGNALS & LIGHTING STANDARD DRAWINGS 2026




m **DEPARTMENT OF
TRANSPORTATION**

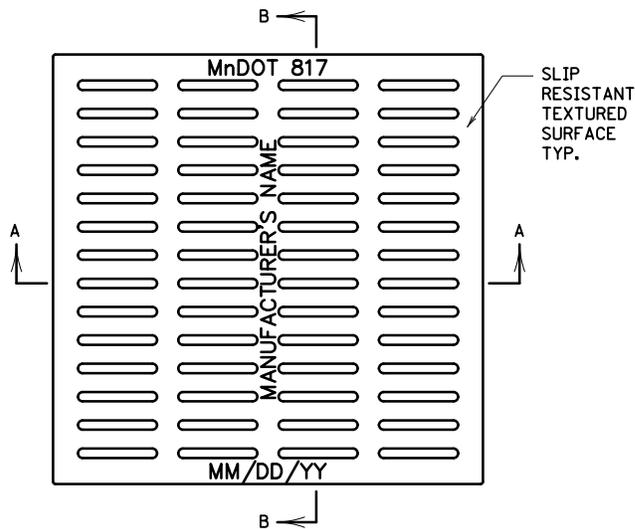


TOP VIEW

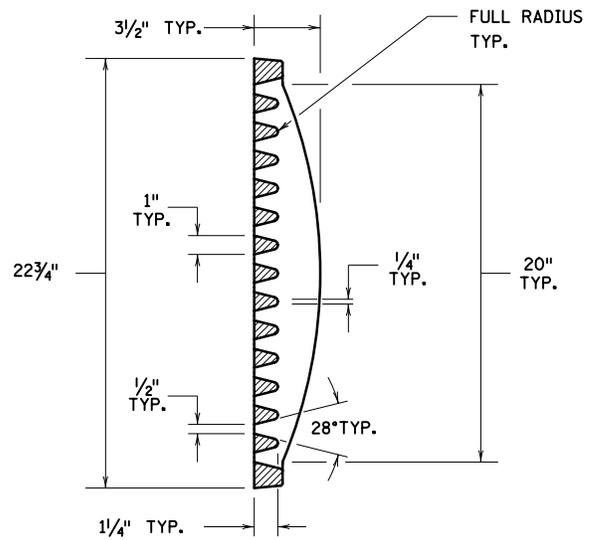

SECTION B-B

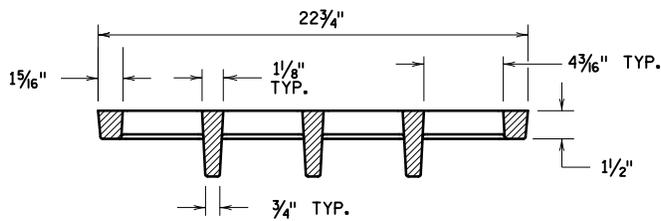

SECTION A-A

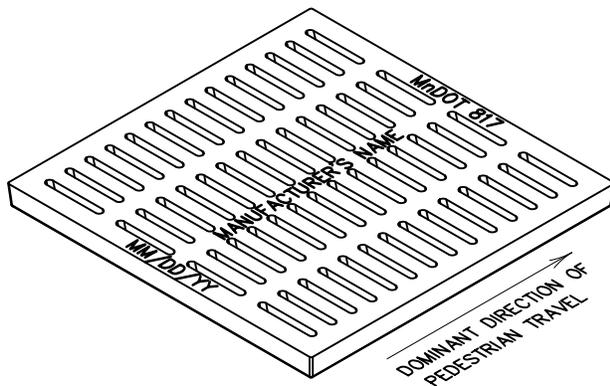

ISOMETRIC TOP VIEW

NOTES:
 THIS GRATE MEETS ADA REQUIREMENTS.
 THIS GRATE USED WITH FRAME CASTING NO. 805.
 CAST GRAY IRON, AASHTO M105/ASTM A48, CLASS 35B.
 PRODUCT MARKING PER AASHTO M 105. CASTING SHALL INCLUDE: MANUFACTURER, CASTING DATE, MnDOT DESIGNATION, AND CASTING NUMBER. MARKING TEXT SHALL BE 3/4" IN HEIGHT AND DEPRESSED 1/8".

GRATE CASTING NO. 817

APPROVED SEPTEMBER 19, 2018

Ron S...
 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION


ADA GRATE INLET CASTING

SPECIFICATION
 REFERENCE


2506

STANDARD
 PLATE
 NO.


4155A

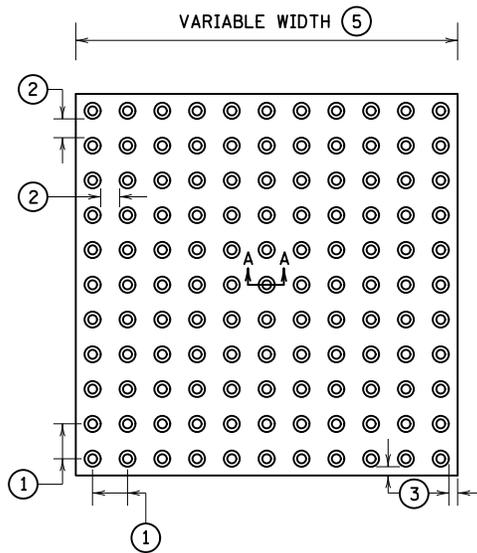

RECTANGULAR PLATES

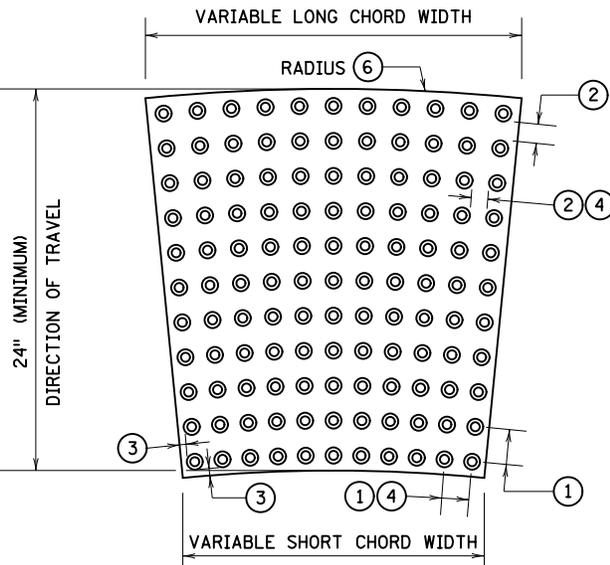

RADIAL PLATES



| TYPICAL RADIAL TRUNCATED DOME PLATES | | | |
|--------------------------------------|---------------------------|-----------------------|------------------------------------|
| RADIUS (FEET) ⑦ | LONG CHORD WIDTH (INCHES) | SQUARE FEET PER PLATE | PLATES REQUIRED FOR 90 DEGREE TURN |
| 10 | 23 1/2 | 3.53 | 8 |
| 15 | 18 13/16 | 2.93 | 15 |
| 15 | 23 1/2 | 3.67 | 12 |
| 20 | 18 13/16 | 3.00 | 20 |
| 20 | 18 7/8 | 2.98 | 20 |
| 25 | 20 1/2 | 3.28 | 23 |
| 25 | 23 9/16 | 3.77 | 20 |
| 30 | 22 5/8 | 3.65 | 25 |
| 35 | 22 | 3.56 | 30 |

NOTES:

DETECTABLE WARNING SURFACES SHALL FOLLOW THE PUBLIC RIGHTS-OF-WAY ACCESSIBILITY GUIDELINES (PROWAG).
 DETECTABLE WARNINGS CONSIST OF TRUNCATED DOMES ALIGNED IN A SQUARE OR RADIAL GRID PATTERN.
 DETECTABLE WARNINGS ARE REQUIRED:
 -WHERE RAMPS, LANDINGS, OR BLENDED TRANSITIONS PROVIDE A FLUSH PEDESTRIAN CONNECTION TO THE ROADWAY.
 -WHERE PEDESTRIAN ACCESS ROUTES CROSS COMMERCIAL DRIVEWAYS THAT ARE PROVIDED WITH TRAFFIC CONTROL DEVICES OR OTHERWISE PERMITTED TO OPERATE LIKE A PUBLIC ROADWAY.
 -AT PEDESTRIAN RAILWAY CROSSINGS.
 -ON RAIL PLATFORMS WHERE BOARDING EDGES ARE NOT PROTECTED.
 DETECTABLE WARNINGS SHALL EXTEND:
 -A MINIMUM OF 24" IN THE DIRECTION OF TRAVEL.
 -THE FULL WIDTH OF THE RAMP, LANDING, OR BLENDED TRANSITION, WITHIN 3" OF FULL WIDTH ON EITHER END.
 -THE FULL LENGTH OF THE PUBLIC USE AREA OF A RAIL PLATFORM.
 DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT GUTTER, ROADWAY, OR WALKWAY, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT. CONTRAST MAY BE PROVIDED ON THE FULL RAMP SURFACE, EXCLUDING THE FLARED SIDES.

FOR MNDOT PROJECTS, SEE MNDOT'S APPROVED/QUALIFIED PRODUCT LISTS.

ALL TRUNCATED DOME SYSTEMS SHALL BE PLACED IN STRICT ACCORDANCE WITH THE RECOMMENDATIONS OF THE MANUFACTURER.

- ① CENTER-TO-CENTER DOME SPACING: 1.6" MINIMUM, 2.4" MAXIMUM.
- ② BASE-TO-BASE DOME SPACING: 0.65" MINIMUM.
- ③ DOME BASE TO PLATE EDGE SPACING: 0.35" MINIMUM, 0.75" MAXIMUM.
- ④ SPACING VARIES ON RADIAL PLATES.
- ⑤ TYPICAL WIDTHS AVAILABLE: 12", 18", 24", 30", 36". CHECK WITH MANUFACTURERS FOR AVAILABLE WIDTHS.
- ⑥ ON RADIAL PLATE, RADIUS DEFINED AT BACK OF CURB.
- ⑦ TYPICAL RADII. CHECK WITH MANUFACTURERS FOR AVAILABLE RADII.


APPROVED AUGUST 23, 2010

 STATE DESIGN ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
DETECTABLE WARNING SURFACE
 TRUNCATED DOMES

SPECIFICATION REFERENCE
 2531
 2563
 REVISED
 01-09-2020 M.J.E.


STANDARD PLATE NO.
7038A

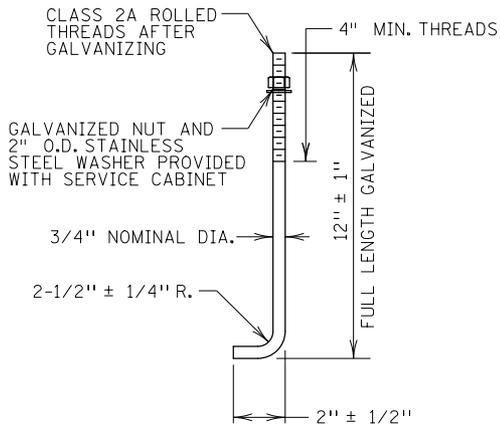


ANCHOR ROD DETAIL
(SPEC. 3385 TYPE A)

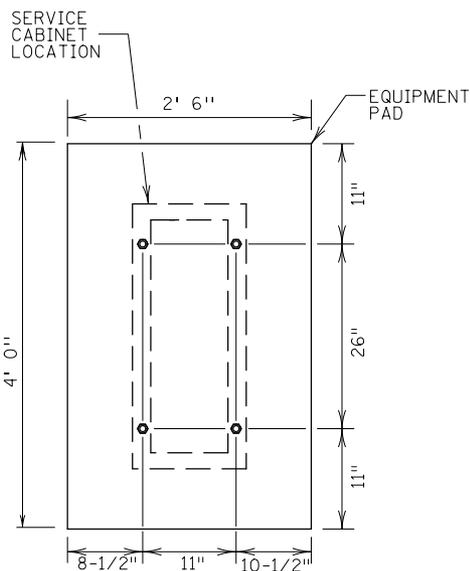

ANCHOR ROD LOCATION DETAIL

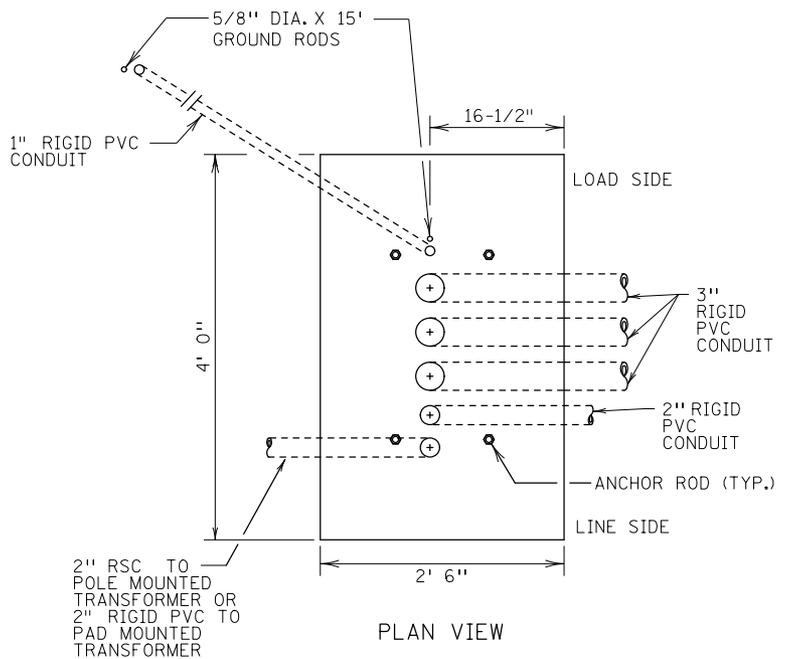

PLAN VIEW

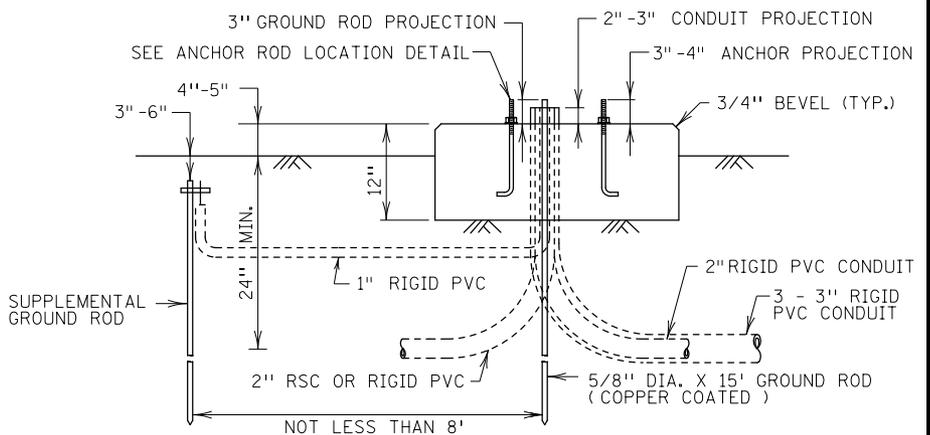

SIDE VIEW

CAST-IN-PLACE EQUIPMENT PAD B

NOTES:

CONTRACTOR SHALL HAVE THE OPTION OF PRECAST OR CAST-IN-PLACE EQUIPMENT PAD.

CONCRETE SHALL BE MIX 3F52.

TOP OF PAD SHALL HAVE A BRUSH TOP FINISH.

PLACE THREE (3) 3 IN. RIGID PVC CONDUIT WITH 90° ELBOWS ON THE LOAD SIDE OF THE EQUIPMENT PAD.

PLACE ONE (1) 2 IN. RIGID PVC CONDUIT WITH 90° ELBOW ON THE LOAD SIDE OF THE EQUIPMENT PAD FOR FUTURE USE ONLY. USE PVC CONDUIT CAPS OR PLUGS TO SEAL THE OPEN ENDS OF THE CONDUIT

END BELL FITTINGS ON CONDUIT ENDS SHALL BE INCLUDED PER SPEC. 2565.3D.

PLACE FOUR (4) GALVANIZED "L" SHAPED CONCRETE EMBEDDED TYPE ANCHOR RODS AS SHOWN IN THE ANCHOR ROD DETAIL. PLACE ANCHOR RODS AS SHOWN ON THE ANCHOR ROD LOCATION DETAIL. USE A RIGID STEEL TEMPLATE TO HOLD ANCHOR RODS IN PLACE UNTIL CONCRETE HAS CURED.

PLACE A 5/8" DIA. X 15' GROUND ROD ELECTRODE IN THE LOAD SIDE OF THE EQUIPMENT PAD AND PROJECT 3" +/- 1/4". PLACE A SUPPLEMENTAL 5/8" DIA. X 15' GROUND ROD ELECTRODE OUTSIDE OF THE EQUIPMENT PAD WITH THE TOP OF THE ELECTRODE BURIED 3" TO 6" BELOW THE GROUND LINE (7" TO 8" IF LOCATED UNDER BITUMINOUS OR CONCRETE SURFACES) AND NOT LESS THEN 8' FROM THE GROUND ROD ELECTRODE IN THE PAD.

APPLY DE-OX COMPOUND TO THE GROUNDING CONNECTIONS AFTER FINAL ASSEMBLY.

APPLY ANTI -SEIZE COMPOUND THAT MEETS MIL-PRF-907E SPEC. WITH A BRUSH TO ALL ANCHOR ROD THREADS.

APPROVED JULY 15, 2015

Christy M. Ry
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


EQUIPMENT PAD B

SPECIFICATION
REFERENCE
2461, 2545
2550, 2565


STANDARD
PLATE
NO.

8106D

1 OF 3

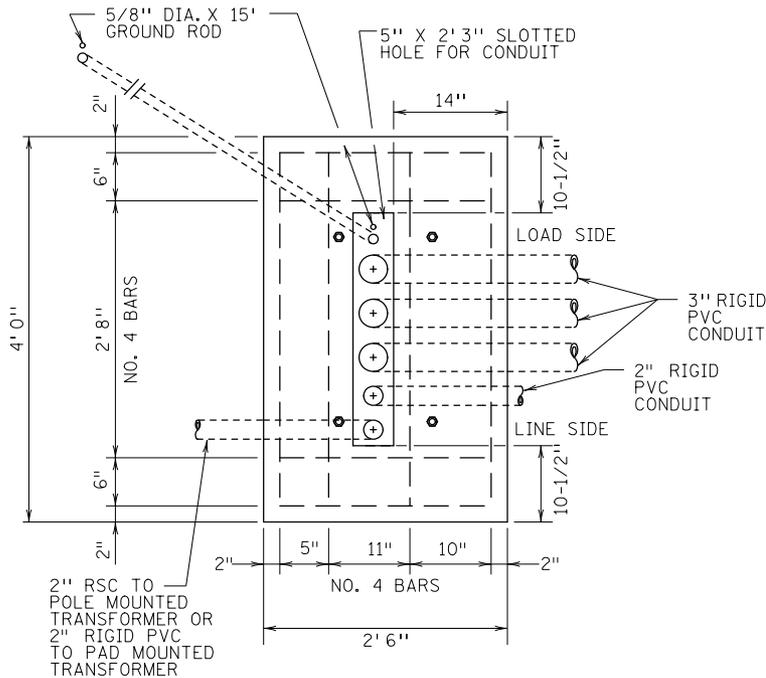

PLAN VIEW

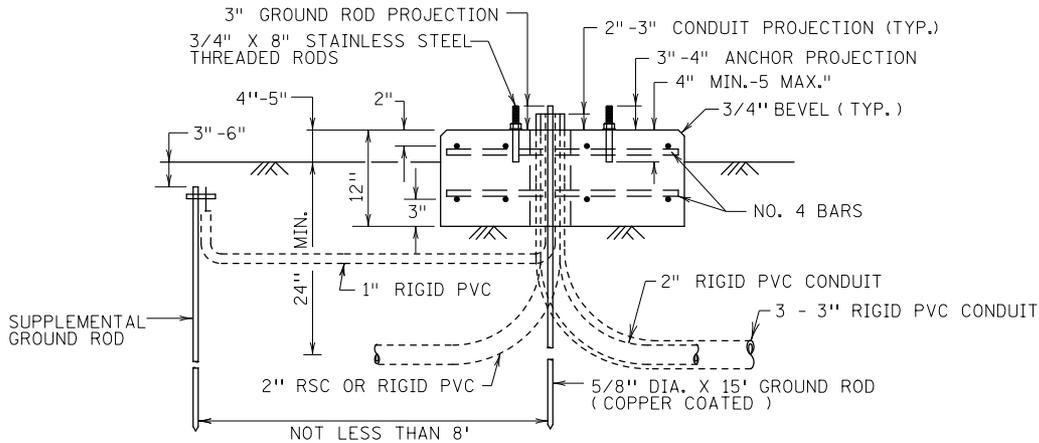

SIDE VIEW
PRECAST EQUIPMENT PAD B

NOTES:

- CONTRACTOR SHALL HAVE THE OPTION OF PRECAST OR CAST-IN-PLACE EQUIPMENT PAD.
- CONCRETE SHALL BE MIX 3F52.
- TOP OF PAD SHALL HAVE A BRUSH TOP FINISH.
- SEE ANCHOR ROD LOCATION DETAIL ON SHEET 1 OF 3 FOR BOLT LOCATION.
- PLACE THREE (3) 3 IN. RIGID PVC CONDUIT WITH 90° ELBOWS ON THE LOAD SIDE OF THE EQUIPMENT PAD.
- PLACE ONE (1) 2 IN. RIGID PVC CONDUIT WITH 90° ELBOW ON THE LOAD SIDE OF THE EQUIPMENT PAD FOR FUTURE USE ONLY. USE PVC CONDUIT CAPS OR PLUGS TO SEAL THE OPEN ENDS OF THE CONDUIT
- END BELL FITTINGS ON CONDUIT ENDS SHALL BE INCLUDED PER SPEC. 2565.3D.
- FILL AREA AROUND RIGID PVC CONDUIT AND GROUND ROD AS APPROVED BY THE ENGINEER.
- PLACE A 5/8" DIA. X 15' GROUND ROD ELECTRODE IN THE LOAD SIDE OF THE EQUIPMENT PAD AND PROJECT 3" +/- 1/4". PLACE A SUPPLEMENTAL 5/8" DIA. X 15' GROUND ROD ELECTRODE OUTSIDE OF THE EQUIPMENT PAD WITH THE TOP OF THE ELECTRODE BURIED 3" TO 6" BELOW THE GROUND LINE (7" TO 8" IF UNDER BITUMINOUS OR CONCRETE SURFACES) AND NOT LESS THAN 8' FROM THE GROUND ROD ELECTRODE IN THE PAD

- APPLY DE-OX COMPOUND TO THE GROUNDING CONNECTIONS AFTER FINAL ASSEMBLY.
- REINFORCEMENT SHALL BE NO. 4. BAR. EACH PAD SHALL CONTAIN: EIGHT (8) 3'-8" LENGTH BARS AND EIGHT (8) 2'-2" LENGTH BARS AS SHOWN.
- ANCHOR RODS SHALL BE CHAMFERED AND SHALL BE IN ACCORDANCE WITH 3385.2D. RODS SHALL BE ANCHORED USING AN EPOXY ADHESIVE INTO 7/8" DIA. DRILLED HOLE 4" - 5" IN DEPTH PER MANUFACTURE'S INSTRUCTIONS. MECHANICAL ANCHOR BOLTS OR CONCRETE WEDGE ANCHORS SHALL NOT BE USED. USE AN APPROVED EPOXY ADHESIVE FOR APS PUSH BUTTON BASE ADHESIVE ANCHOR SYSTEMS FROM MnDOT'S APPROVED/QUALIFIED PRODUCTS LIST. PLACE ANCHORS AS SHOWN ON THE ANCHOR ROD LOCATION DETAIL. USE NUT AND WASHER PROVIDED WITH THE SERVICE CABINET.
- APPLY ANTI-SEIZE COMPOUND THAT MEETS MIL-PRF-907E SPEC. WITH A BRUSH TO ALL ANCHOR ROD THREADS.


APPROVED JULY 15, 2015

 STATE DESIGN ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
 EQUIPMENT PAD B

SPECIFICATION
 REFERENCE
 2461, 2545
 2550, 2565

STANDARD
 PLATE
 NO.
 8106D
 2 OF 3

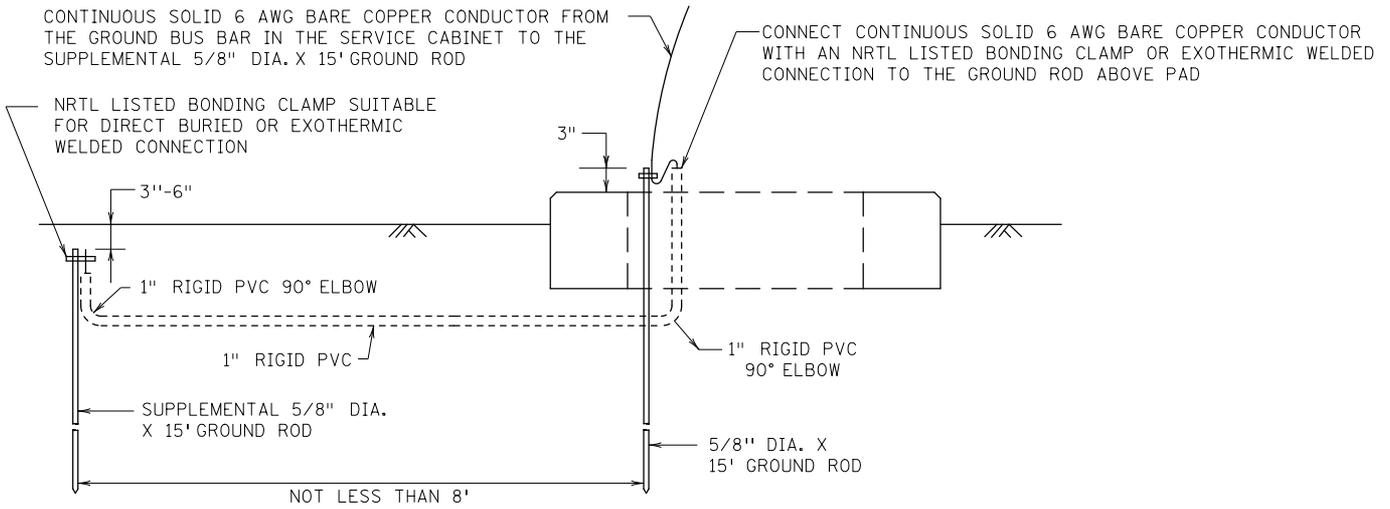

GROUNDING ELECTRODE SYSTEM FOR CAST-IN-PLACE PAD

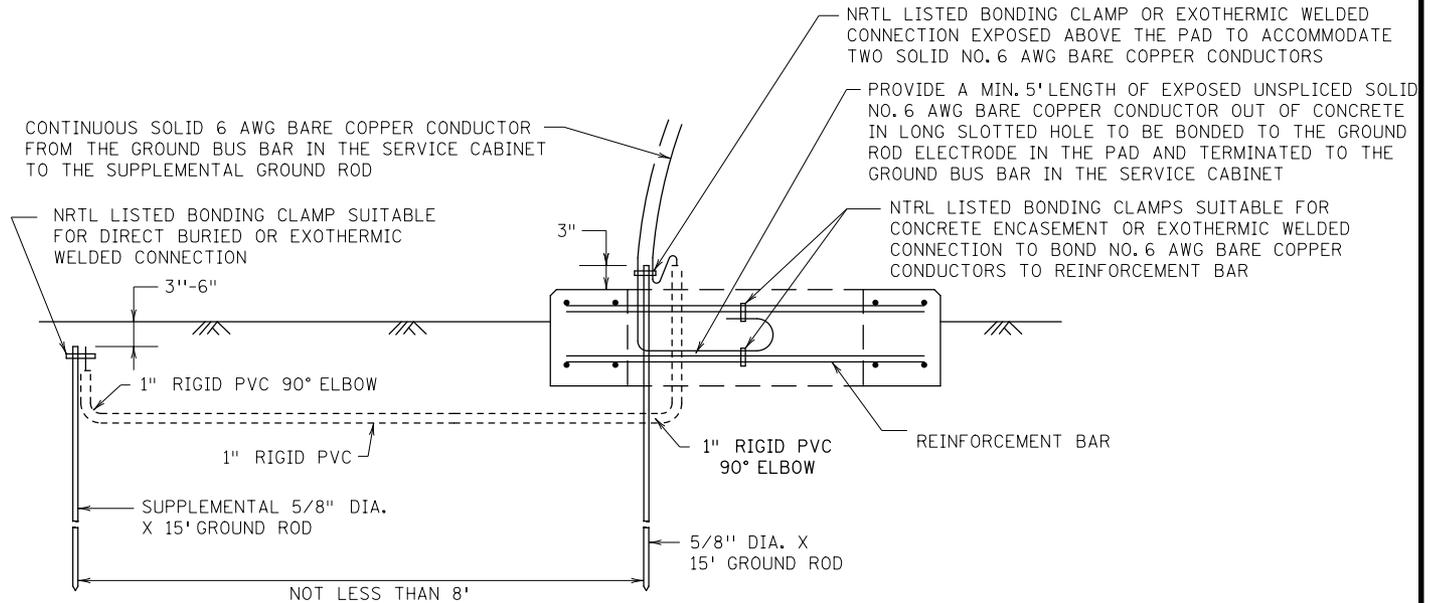

GROUNDING ELECTRODE SYSTEM FOR PRECAST PAD

NOTES:

APPLY DE-OX COMPOUND TO THE GROUNDING CONNECTIONS AFTER FINAL ASSEMBLY.

APPROVED JULY 15, 2015

Christy M. Ry
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


EQUIPMENT PAD B

SPECIFICATION
REFERENCE
2461, 2545
2550, 2565

STANDARD
PLATE
NO.

8106D

3 OF 3

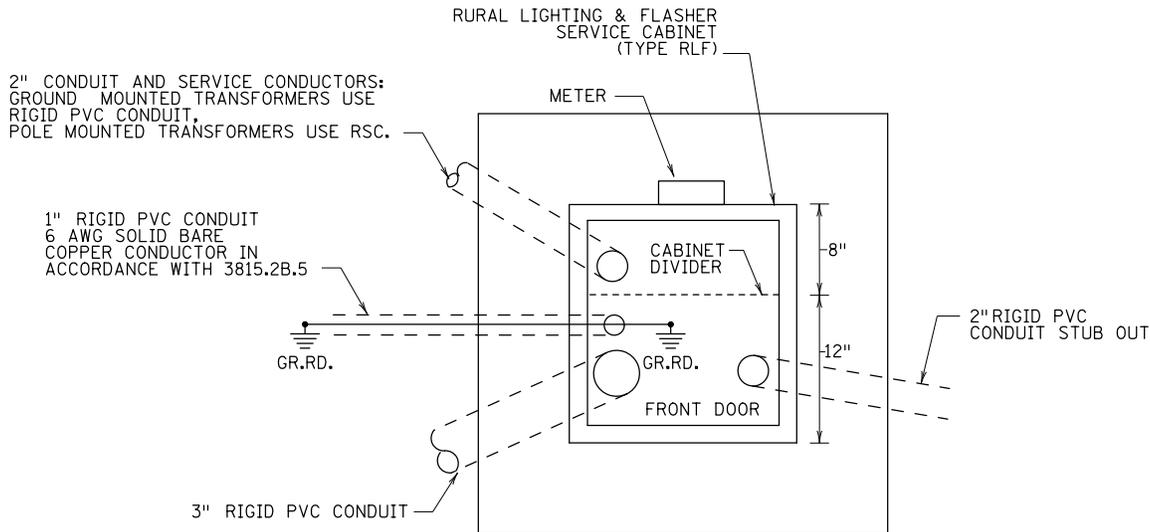

PLAN VIEW

NOTES:

1/2" RADIUS ON ALL FORMED EDGES OF PAD.

COVER THE TOP OF THE CONDUITS AFTER PLACEMENT UNTIL THE CONDUCTORS ARE PLACED.

LOCATE CONDUITS INSIDE THE CABINET AWAY FROM SUPPORTING MEMBERS AND DIVIDERS OF THE CABINET.

PROVIDE TWO 15 FOOT LONG GROUND ROD ELECTRODES. PLACE A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH SPEC 2545.3F.3, SEE DETAIL (GROUNDING ELECTRODE SYSTEM FOR CAST-IN-PLACE PAD) ON SHEET 3 OF STANDARD PLATE 8106.

USE CONCRETE MIX 3F52.

USE GALVANIZED ANCHOR RODS, NUTS, AND WASHERS SUPPLIED WITH THE CABINET.


APPROVED DECEMBER 16, 2016

Ron Smith
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
RLF EQUIPMENT PAD
FOUNDATION LAYOUT
(CAST-IN-PLACE)

SPECIFICATION
REFERENCE
2461
2545
3850


STANDARD
PLATE
NO.
8107A
1 OF 3

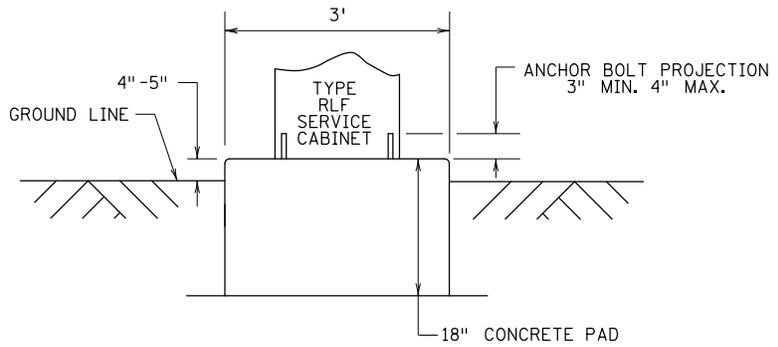


SIDE VIEW

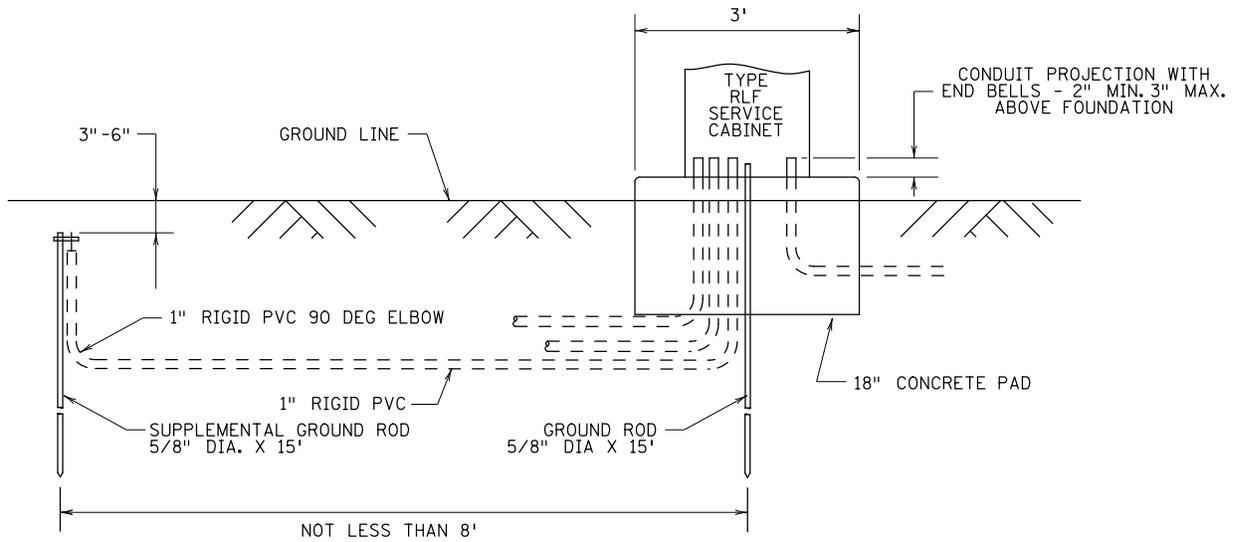

FRONT VIEW

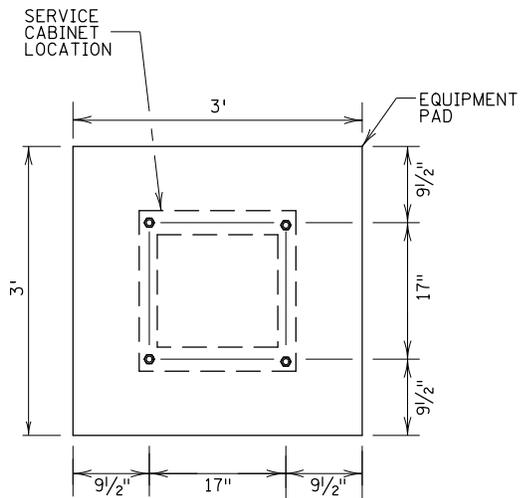

ANCHOR ROD LOCATION DETAIL

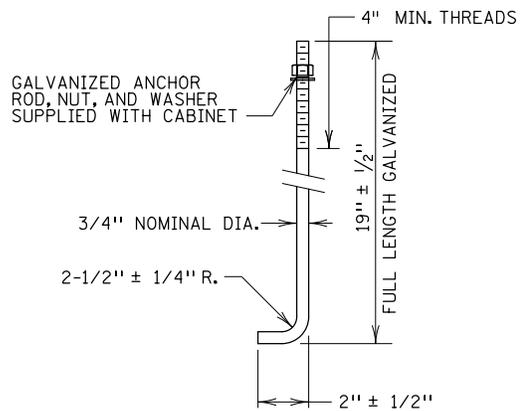

ANCHOR ROD DETAIL
(SPEC. 3385 TYPE A OR TYPE B AND GALVANIZED PER SPEC 3392)

SEE NOTES ON SHEET 1 OF 3.



APPROVED DECEMBER 16, 2016

Ron Smith
STATE DESIGN ENGINEER



STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
RLF EQUIPMENT PAD
FOUNDATION LAYOUT
(CAST-IN-PLACE)

SPECIFICATION
REFERENCE
2451
2545
3850

STANDARD
PLATE
NO.
8107A
2 OF 3

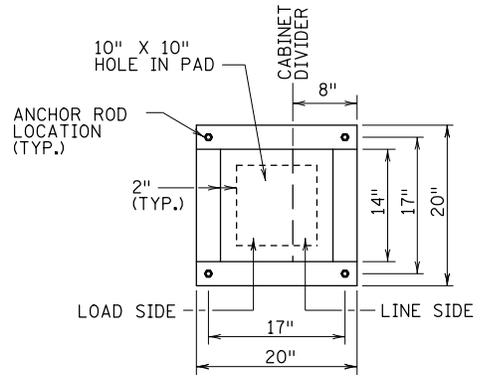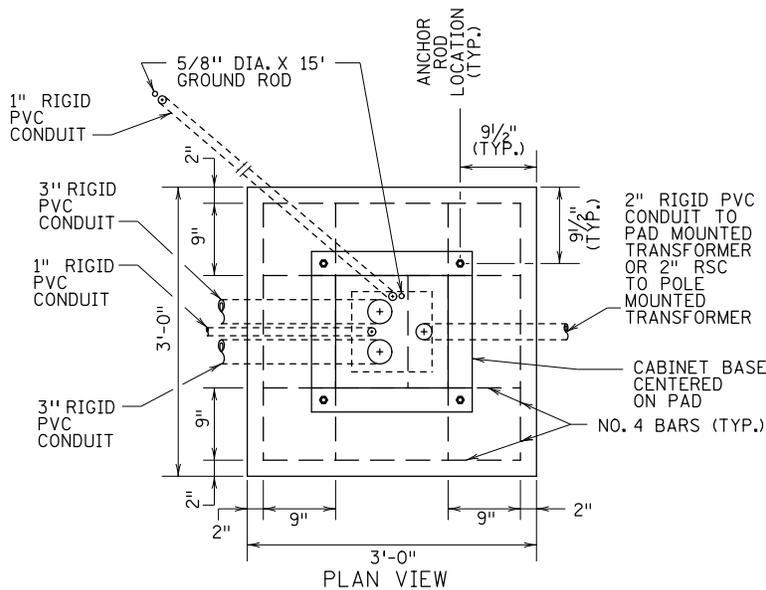

CABINET BASE

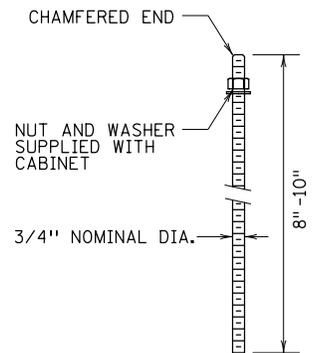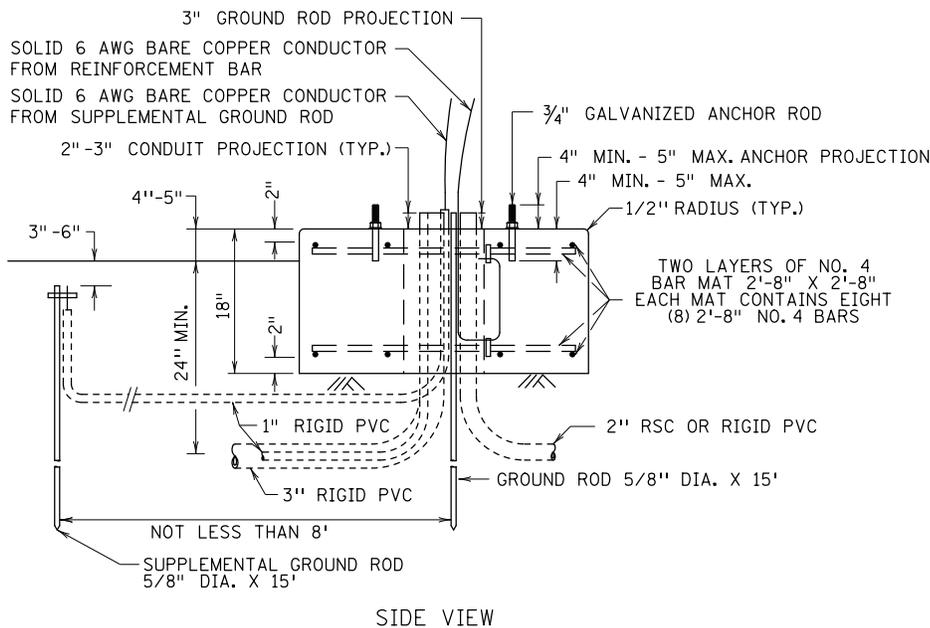

ANCHOR ROD DETAIL
(SPEC. 3385 TYPE A OR TYPE B AND GALVANIZED PER SPEC 3392)

NOTES:

FILL 10" X 10" HOLE IN PAD WITH A MATERIAL APPROVED BY THE ENGINEER AFTER THE CONDUITS AND GROUND ROD HAVE BEEN PLACED.

USE CONCRETE MIX 3Y82.

1/2" RADIUS ON ALL EDGES OF PAD.

CAP THE TOP OF THE CONDUITS AFTER PLACEMENT UNTIL THE CONDUCTORS ARE PLACED.

LOCATE CONDUITS INSIDE THE CABINET AWAY FROM SUPPORTING MEMBERS AND DIVIDERS OF THE CABINET.

PROVIDE TWO 15' LONG GROUND ROD ELECTRODES. PLACE A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH SPEC 2545.3F.3. SEE DETAIL (GROUNDING ELECTRODE SYSTEM FOR PRECAST PAD) ON SHEET 3 OF STANDARD PLATE 8106.

CENTER CABINET ON PAD.

PROVIDE 3/4" GALVANIZED ANCHOR RODS, INSERT ANCHOR RODS IN 7/8" DIA. DRILLED HOLES 4" TO 5" DEEP WITH AN APPROVED EPOXY ADHESIVE FOUND ON MnDOT'S APPROVED/QUALIFIED PRODUCTS LIST (ACCESSIBLE PEDESTRIAN SIGNAL (APS) PUSH BUTTON BASE ADHESIVE ANCHORING). USE GALVANIZED NUTS AND WASHERS SUPPLIED WITH CABINET FOR ANCHOR RODS.

DO NOT USE MECHANICAL OR CONCRETE WEDGE ANCHORS. DO NOT WET CAST ANCHORS.

APPROVED DECEMBER 16, 2016


Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
RLF EQUIPMENT PAD
FOUNDATION LAYOUT
(PRECAST)

SPECIFICATION
REFERENCE
2451 2462
2545 2550
2565 3301
3850


STANDARD
PLATE
NO.
8107A
3 OF 3

TYPE 10A




ONE WAY SIGNAL

TYPE 10B




ONE WAY SIGNAL
1-SET PEDESTRIAN
INDICATIONS

TYPE 10C




ONE WAY SIGNAL
2-SETS PEDESTRIAN
INDICATIONS

TYPE 20A




TWO WAY SIGNAL

TYPE 20B




TWO WAY SIGNAL
1-SET PEDESTRIAN
INDICATIONS

TYPE 20C




TWO WAY SIGNAL
2-SETS PEDESTRIAN
INDICATIONS

TYPE 30A




1-SET
PEDESTRIAN
INDICATIONS


TYPE 30B



2-SETS
PEDESTRIAN
INDICATIONS



TYPE A
MAST ARM
POLE



TYPE B
MAST ARM
POLE

HUB LOCATIONS
FOR MAST ARM POLES

| | |
|-------|---|
| ● | TRAFFIC SIGNAL MAST ARM POLE |
| → | SIGNAL FACE |
| → | PEDESTRIAN INDICATIONS |
| | 1-1/2" HALF COUPLING WELDED IN POLE |
| ⌋ | POLE MOUNTING BRACKET |
| ● ↓ → | PLANS SYMBOL (TYPICAL) |
| —●— | ELBOW OR TEE (TOP VIEW OF BRACKETING) |
| === | 1-1/2" IRON PIPE SIGNAL BRACKET |
| ⌋ A | 90° ELBOW THREADED INSIDE BOTH ENDS |
| ⌋ B | TEE THREADED INSIDE ALL ENDS |
| ⌋ C | CROSS - THREADED INSIDE ALL ENDS, ONE END SERRATED |

NOTES:

- POLE MOUNTING OF SIGNAL FACES AND/OR PEDESTRIAN INDICATIONS WILL BE INDICATED IN THE PLANS OR SPECIAL PROVISIONS ACCORDING TO TYPE. THE NOTATION "TYPE 10B-POLE MOUNTED ___°" INDICATES A ONE-WAY VEHICLE SIGNAL FACE AND 1-SET PEDESTRIAN INDICATIONS POLE MOUNTED AT THE ANGLE SPECIFIED AND UTILIZING THE PIPE FITTINGS AND BRACKETING SHOWN IN THIS PLATE.
- ALL MOUNTINGS SHOWN ARE TYPICAL, SUBJECT TO MINOR REVISIONS.
- NUMBER OF SIGNAL INDICATIONS PER SIGNAL FACE SHALL BE AS REQUIRED IN THE PLANS OR SPECIAL PROVISIONS.
- LENGTH OF SIGNAL BRACKETS SHALL BE SUFFICIENT TO ROTATE SIGNAL FACES FOR PROPER AIMING, WITHOUT CUTTING OR REMOVING BACKGROUND SHIELDS. PEDESTRIAN INDICATIONS SHALL BE ADJUSTABLE 360 DEGREES.
- POLE MOUNTING BRACKETS SHALL BE 1-1/2" DIA. HORIZONTAL THREADED HUBS ATTACHED TO POLE BY MIN. 3/4" WIDE STAINLESS STEEL STRAPS.
- BOTTOMS OF LOWER VEHICLE SIGNAL INDICATIONS OF A TWO-WAY SIGNAL SHALL BE AT THE SAME ELEVATION.
- BACKGROUND SHIELDS SHALL BE PROVIDED ON ALL SIGNAL FACES.
- PIPE FITTINGS (ELBOWS, TEES AND CROSSES) SHALL BE MALLEABLE IRON OR ANODIZED ALUMINUM. UNUSED OPENINGS SHALL BE PLUGGED WITH APPROPRIATE TYPE ORNAMENTAL THREADED PIPE CAPS. THE SERRATED END OF A PIPE FITTING SHALL BE 72 TOOTH, 5 DEG. RING MATCHING THE RING OF THE SIGNAL INDICATION.
- WHEN MALLEABLE IRON IS UTILIZED, ALL SIGNAL BRACKETS, PIPE FITTINGS AND CAPS, AND POLE MOUNTING BRACKETS SHALL BE PAINTED WITH AN APPROVED METAL PRIMER PER SPEC 3520, AND TWO (2) COATS OF APPROVED PAINT PER SPEC. 3532 OR WHEN ALUMINUM IS UTILIZED, IT MUST BE ANODIZED ALUMINUM.
- MUST PROVIDE ALL APPROPRIATE LOCK NUTS, NIPPLES, GASKETS, ETC., NECESSARY TO SECURELY FASTEN SIGNAL AND PEDESTRIAN INDICATIONS.
- WHEN MOUNTING SIGNAL FACES AND/OR PEDESTRIAN INDICATIONS ON STREET LIGHT POLES, SIGN TRUSS POLES, SPECIAL MAST ARM POLES OR WOOD POLES, THE SAME BASIC BRACKETING SHOWN ON THIS PLATE SHALL APPLY.
- BRUSH-ON ANTI-SEIZE COMPOUND MUST BE USED ON EACH THREADED FITTING DURING ASSEMBLY.

APPROVED MAY 22, 2009

Milakus
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

TRAFFIC SIGNAL BRACKETING
(POLE MOUNTED)


SPECIFICATION
REFERENCE

2565

STANDARD
PLATE
NO.


8110E

TYPE 1A




10 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL

TYPE 1B





10 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 1C





TYPE 1D





10 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

TYPE 1E





TYPE 2A





10 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL

TYPE 2B





10 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 2C





10 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

TYPE 2D





TYPE 3A





10 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL

TYPE 3B



10 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 3C



10 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

NOTES:

1. SEE SHEET 3 FOR LEGEND OF SYMBOLS, PEDESTAL SLIPFITTER COLLAR DETAIL AND NOTES.
2. SIGNAL PEDESTAL DIMENSIONS SHOWN ARE SHAFT LENGTHS.

APPROVED MAY 22, 2009

STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

TRAFFIC SIGNAL BRACKETING
(PEDESTAL MOUNTED)

SPECIFICATION
REFERENCE


2565

STANDARD
PLATE
NO.

8111E


1 OF 3

TYPE 4A




8 FT. SIGNAL PEDESTAL
1 - PEDESTRIAN
SIGNAL FACE

TYPE 4B




8 FT. SIGNAL PEDESTAL
2 - PEDESTRIAN
SIGNAL FACES

TYPE 4C




9 FT. SIGNAL PEDESTAL
1 - PEDESTRIAN
SIGNAL FACES

TYPE 4D




9 FT. SIGNAL PEDESTAL
2 - PEDESTRIAN
SIGNAL FACES

TYPE 5A





13 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL

TYPE 5B





13 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 5C





TYPE 5D





13 FT. SIGNAL PEDESTAL
ONE WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

TYPE 5E





TYPE 6A





13 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL

TYPE 6B





13 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 6C



13 FT. SIGNAL PEDESTAL
TWO WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

TYPE 6D



NOTES:

1. SEE SHEET 3 FOR LEGEND OF SYMBOLS, PEDESTAL SLIPFITTER COLLAR DETAIL AND NOTES.
2. SIGNAL PEDESTAL DIMENSIONS SHOWN ARE SHAFT LENGTHS.
3. SHAFT LENGTH FOR TYPE 5, 6 AND 7 (5 SECTION) INDICATIONS ARE 15'.

APPROVED MAY 22, 2009

Milakus
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

TRAFFIC SIGNAL BRACKETING
(PEDESTAL MOUNTED)

SPECIFICATION
REFERENCE


2565

STANDARD
PLATE
NO.

8111E


2 OF 3

TYPE 7A

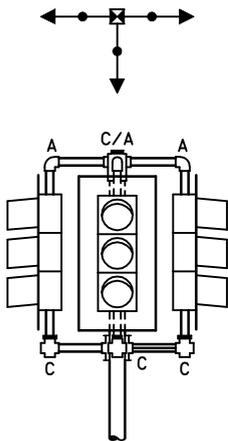


13 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL

TYPE 7B

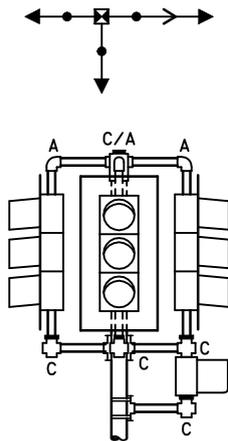



13 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL
1 - PEDESTRIAN SIGNAL FACE

TYPE 7C

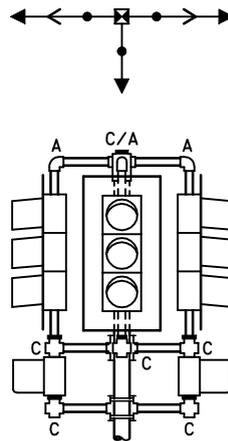

13 FT. SIGNAL PEDESTAL
THREE WAY SIGNAL
2 - PEDESTRIAN SIGNAL FACES

TYPE 7D

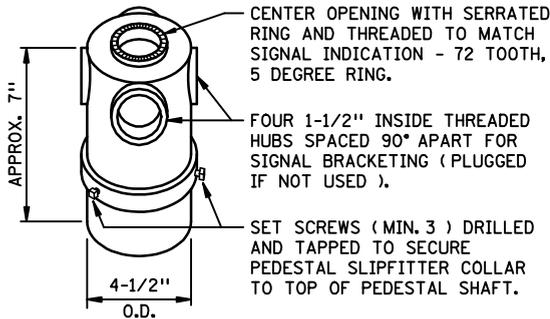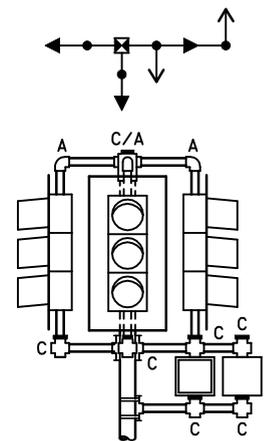

PEDESTAL SLIPFITTER COLLAR

LEGEND OF SYMBOLS

| | |
|--|---|
| | TRAFFIC SIGNAL PEDESTAL |
| | SIGNAL FACE |
| | PEDESTRIAN INDICATIONS |
| | PEDESTAL SLIPFITTER COLLAR |
| | POLE MOUNTING BRACKET |
| | PLANS SYMBOL (TYPICAL) |
| | ELBOW, TEE OR CROSS (TOP VIEW OF BRACKETING) |
| | 1-1/2" IRON PIPE SIGNAL BRACKET |
| | 90° ELBOW THREADED INSIDE BOTH ENDS |
| | TEE THREADED INSIDE ALL ENDS |
| | CROSS - THREADED INSIDE ALL ENDS, ONE END SERRATED |
| | TEE - THREADED INSIDE TWO ENDS - CENTER SLIP FIT (NO THREADS - SET SCREW) |
| | 90° ELBOW - THREADED INSIDE ONE END - OTHER END SLIP FIT (NO THREADS - SET SCREW) |

NOTES:

1. PEDESTAL MOUNTING OF SIGNAL FACES AND/OR PEDESTRIAN INDICATIONS WILL BE INDICATED IN THE PLANS OR SPECIAL PROVISIONS ACCORDING TO TYPE. THE NOTATION "TYPE 1D" INDICATES A ONE-WAY VEHICLE SIGNAL FACE AND 2-SETS PEDESTRIAN INDICATIONS PEDESTAL MOUNTED AND UTILIZING THE PIPE FITTINGS AND BRACKETING SHOWN IN THIS PLATE.
2. ALL MOUNTINGS SHOWN ARE TYPICAL, SUBJECT TO MINOR REVISIONS.
3. NUMBER OF SIGNAL INDICATIONS PER SIGNAL FACE SHALL BE AS REQUIRED IN THE PLANS OR SPECIAL PROVISIONS.
4. BACKGROUND SHIELDS SHALL BE PROVIDED ON ALL SIGNAL FACES.
5. LENGTH OF SIGNAL BRACKETS SHALL BE SUFFICIENT TO ROTATE SIGNAL FACES FOR PROPER AIMING, WITHOUT CUTTING OR REMOVING BACKGROUND SHIELDS. PEDESTRIAN INDICATIONS SHALL BE ADJUSTABLE 360 DEGREES.
6. BOTTOMS OF BACKGROUND SHIELDS ON ONE-WAY SIGNAL FACES SHALL BE SIZED AND ATTACHED TO THE SATISFACTION OF THE ENGINEER.
7. POLE MOUNTING BRACKETS SHALL BE 1-1/2" HORIZONTAL THREADED HUBS ATTACHED TO THE PEDESTAL BY MINIMUM 3/4" WIDE STAINLESS STEEL STRAPS OR SHALL BE ORNAMENTAL TYPE POLE CLAMPS.
8. BOTTOMS OF LOWER VEHICLE SIGNAL INDICATIONS OF A TWO-WAY OR THREE-WAY SIGNAL SHALL BE AT THE SAME ELEVATION.
9. PIPE FITTINGS (ELBOWS, TEES AND CROSSES) AND PEDESTAL SLIP FITTER COLLARS SHALL BE MALLEABLE IRON OR ANODIZED ALUMINUM. UNUSED OPENINGS SHALL BE PLUGGED WITH APPROPRIATE TYPE ORNAMENTAL THREADED PIPE CAPS. THE SERRATED END OF A PIPE FITTING SHALL BE 72 TOOTH, 5 DEGREE RING MATCHING THE RING OF THE SIGNAL OR PEDESTRIAN INDICATION.
10. WHEN MALLEABLE IRON IS UTILIZED, ALL SIGNAL BRACKETS, PIPE FITTINGS AND CAPS, POLE MOUNTING BRACKETS, AND ORNAMENTAL TYPE POLE CLAMPS SHALL BE PAINTED WITH AN APPROVED METAL PRIMER PER SPEC 3520, AND TWO (2) COATS OF APPROVED PAINT PER SPEC 3532. WHEN ALUMINUM IS UTILIZED, IT MUST BE ANODIZED ALUMINUM.
11. MUST PROVIDE ALL APPROPRIATE LOCK NUTS, NIPPLES, GASKETS, ETC., NECESSARY TO SECURELY FASTEN SIGNAL AND PEDESTRIAN INDICATIONS.
12. BRUSH-ON ANTI-SEIZE COMPOUND MUST BE USED ON ALL THREADED FITTINGS DURING ASSEMBLY.
13. SIGNAL PEDESTAL DIMENSIONS SHOWN ARE SHAFT LENGTHS.
14. SHAFT LENGTH FOR TYPE 5, 6, AND 7 (5 SECTION) INDICATIONS ARE 15'.

APPROVED MAY 22, 2009

Milakus
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

TRAFFIC SIGNAL BRACKETING
(PEDESTAL MOUNTED)




SPECIFICATION
REFERENCE

2565




STANDARD
PLATE
NO.

8111E

3 OF 3

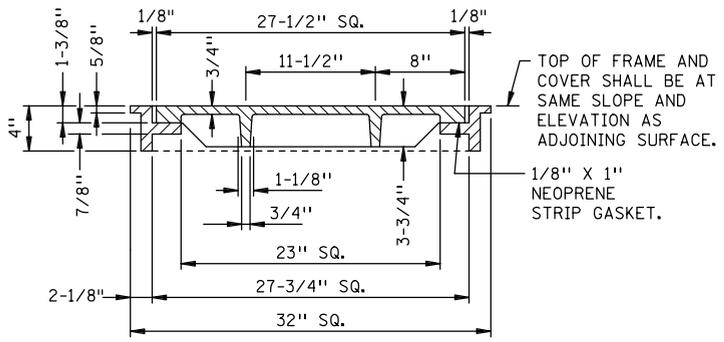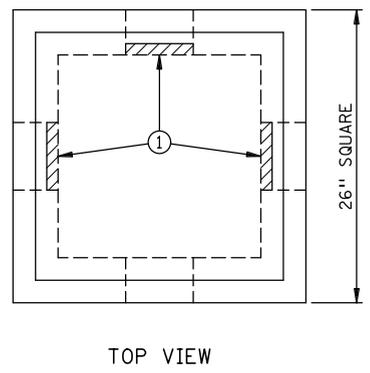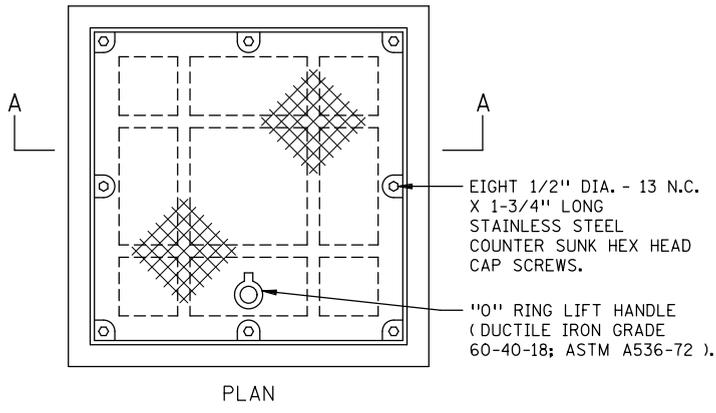

TYPE HD - METAL FRAME AND COVER
SPEC. 3321

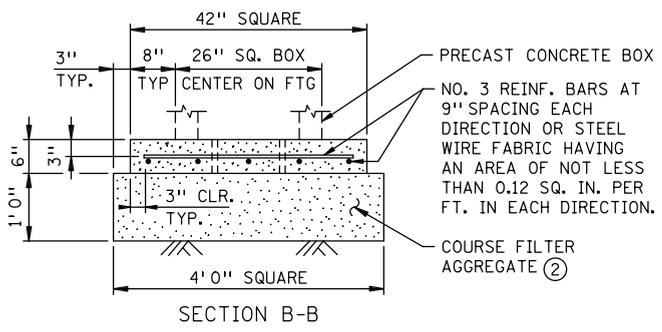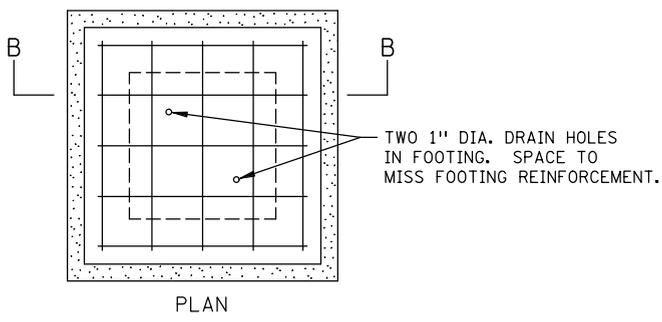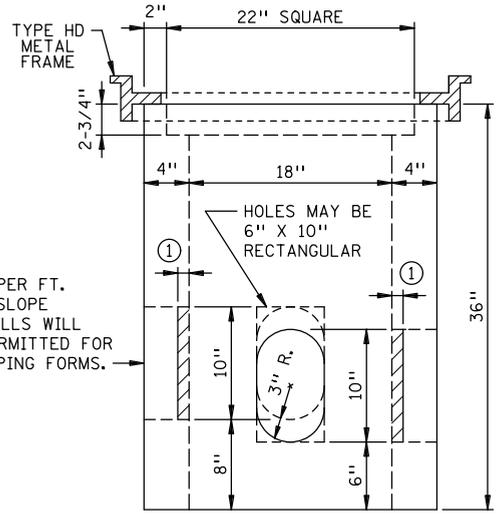

"HD" CONCRETE FOOTING

- NOTES:
- TYPE HD METAL FRAMES AND COVERS SHALL BE COATED WITH MANUFACTURER'S SHOP COAT OF ASPHALT PAINT.
 - AFTER HANDHOLE AND CONDUIT INSTALLATION, ALL INSIDE HANDHOLE SIDE WALLS SHALL BE MADE WATER TIGHT BY PATCHING WITH CONCRETE TO THE SATISFACTION OF THE ENGINEER.
 - FOOTING MAY BE PRECAST OR CAST-IN-PLACE.
 - METAL FRAME AND COVER SHALL BE INDEPENDENTLY GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC) 314.30.
 - EXCAVATIONS AND BACKFILLING SHALL BE IN ACCORDANCE WITH 2451.
 - F&I HANDHOLE IN ACCORDANCE WITH 2565.3E.
 - F&I CONDUITS IN ACCORDANCE WITH 2565.3D.
 - F&I END BELL FITTINGS ON RIGID PVC CONDUIT IN ACCORDANCE WITH 2565.3D.
 - EMBOSS "MnDOT SIGNALS" ON THE COVER FOR TRAFFIC SIGNAL CONTROL PROJECTS.
 - EMBOSS "MnDOT LIGHTING" ON THE COVER FOR ROADWAY LIGHTING PROJECTS.
 - EMBOSS "MnDOT TMS" ON THE COVER FOR ITS PROJECTS.
 - ① 1" ± 1/4" CONCRETE ON INSIDE WALL OF ACCESS HOLES TO BE KNOCKED OUT AS NEEDED. A 3/4" HOLE IS PERMITTED IN KNOCKOUT WALLS FOR INSTALLATION.
 - ② PLACE 4' X 4' X 1' COARSE FILTER AGGREGATE, SPEC. 3149 UNDER FOOTING.

APPROVED JUNE 2, 2014

Christina Ry
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

PRECAST CONCRETE HANDHOLE
WITH VEHICLE LOAD

SPECIFICATION
REFERENCE
3622


STANDARD
PLATE
NO.
8117G

| POLE TYPE | MAST ARM LENGTH | POLE CAMBER ANGLE ∅ |
|------------------|------------------|------------------------|
| TS15, TS20, TS25 | 15' 0" TO 25' 0" | 0°00'00.0" |
| TS30, TS35, TS40 | 30' 0" TO 40' 0" | 0°00'00.0" |
| TS45, TS50, TS55 | 45' 0" TO 55' 0" | 0°30'00.0" |

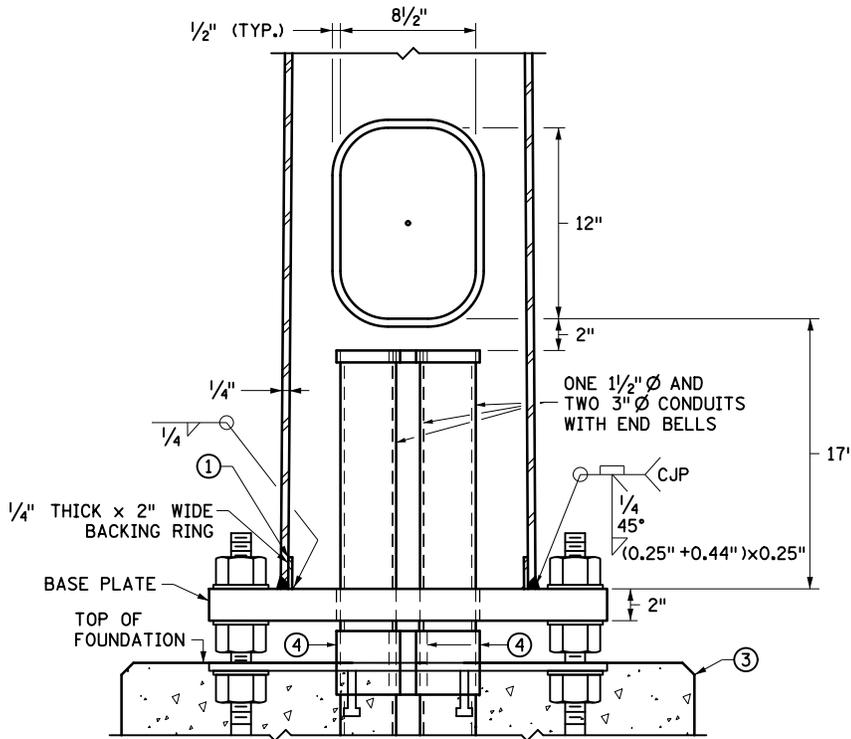


SECTION B-B

FOUNDATION REINFORCEMENT NOT SHOWN FOR CLARITY

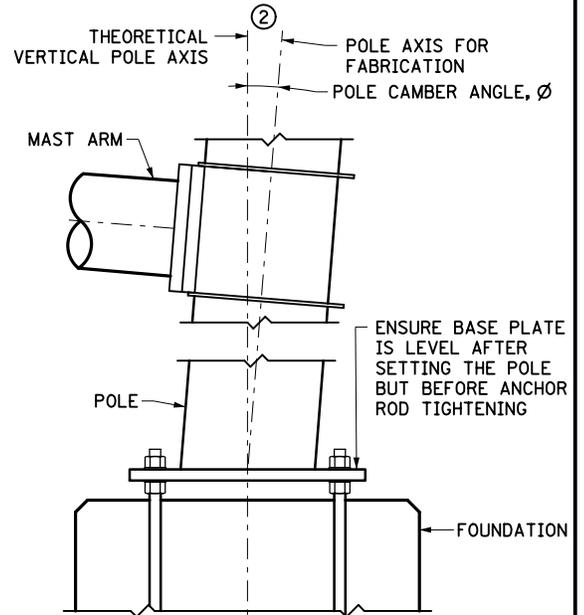

POLE ALIGNMENT

NOT TO SCALE

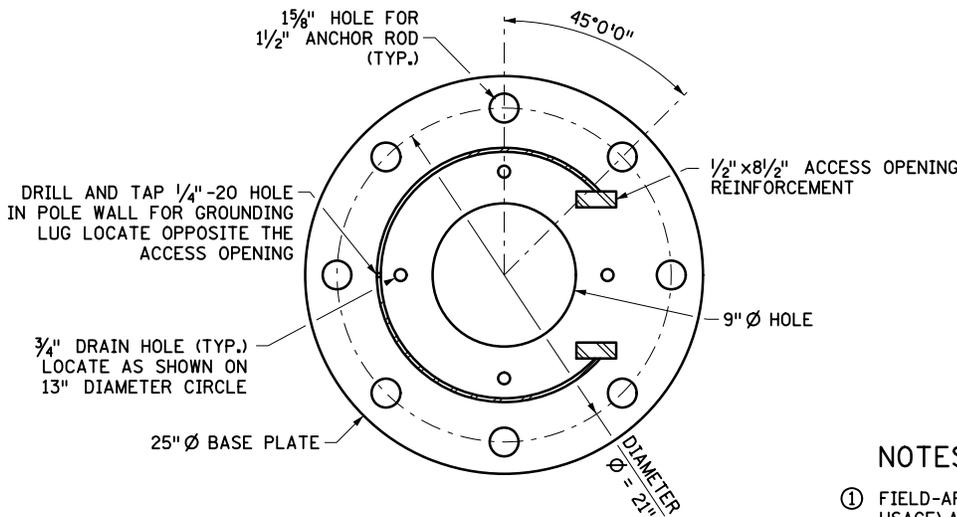

SECTION A-A

CONDUITS NOT SHOWN FOR CLARITY

NOTES:

- ① FIELD-APPLIED 100% SILICONE CAULK (EXTERIOR USAGE) AT TOP OF BACKING RING ALONG ENTIRE CIRCUMFERENCE.
- ② POLE ROTATION IS ABOUT A HORIZONTAL AXIS ORIENTED PERPENDICULAR TO MAST ARM AXIS. SENSE OF ROTATION IS SUCH THAT TIP OF MAST ARM WILL BE RAISED.
- ③ SEE STANDARD PLAN 5-297.861 FOR PVC CONDUIT AND COUPLING INSTALLATION REQUIREMENTS.
- ④ PVC COUPLING.

APPROVED 02-27-2024

Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

POLE AND MAST ARM TYPE TS


POLE DETAILS
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.

8124A

2 OF 12

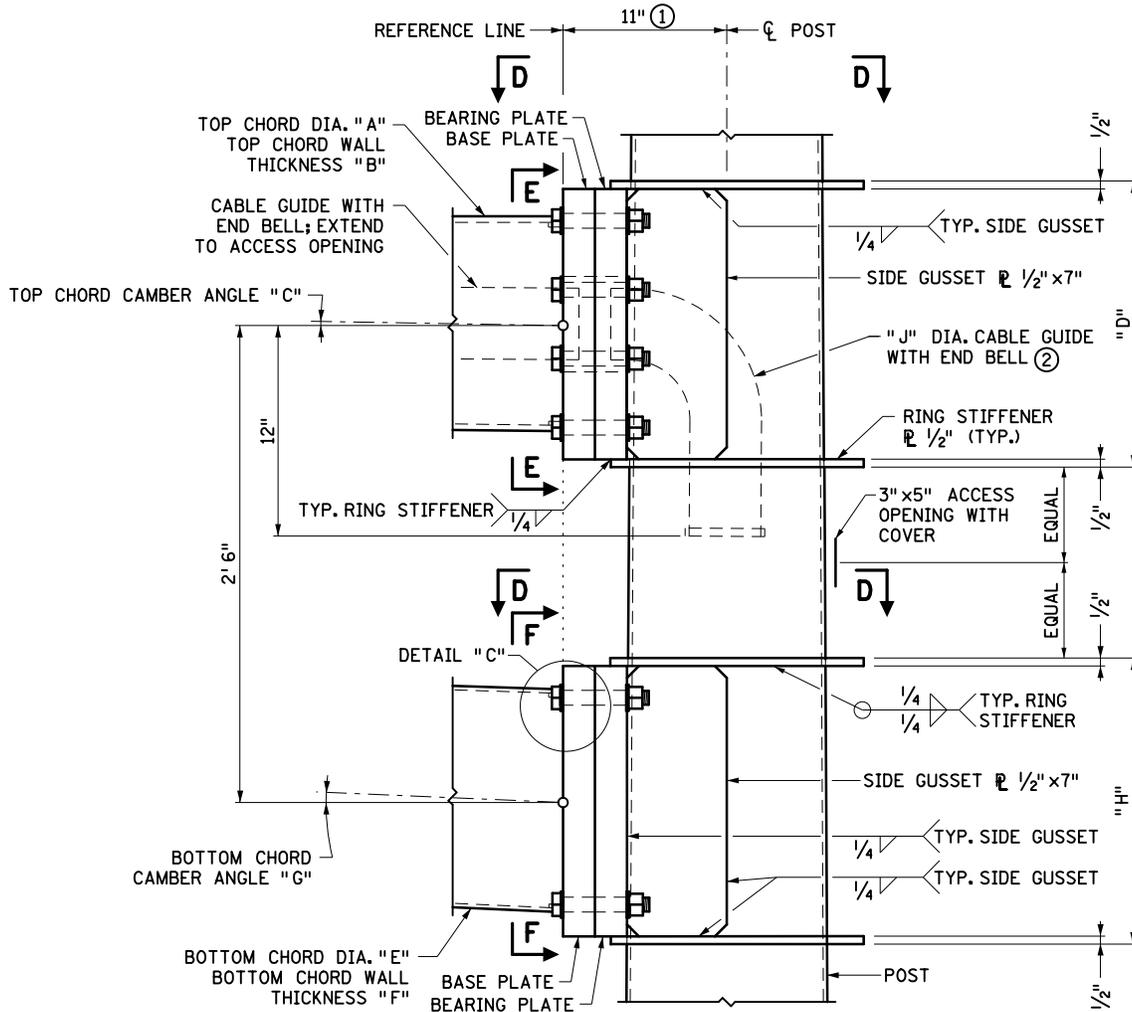

POLE/MAST ARM CONNECTION DETAIL
 BOLT CONFIGURATION VARIES BY MAST ARM LENGTH
 SEE SHEETS 4 AND 5 OF 12 FOR DETAILS

MAST ARM CONNECTION DIMENSIONS

| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | | | | | |
|------------------------------------|-----------|-----------------|------------|------------|------------|------------|------------|------------|------------|------------|
| | | 15' | 20' | 25' | 30' | 35' | 40' | 45' | 50' | 55' |
| CHORD DIAMETER AT BASE PLATE | A | 8.0" | 8.3" | 9.0" | 9.7" | 10.4" | 11.1" | 11.8" | 12.5" | 13.2" |
| CHORD WALL THICKNESS AT BASE PLATE | B | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.25" | 0.25" | 0.25" |
| CHORD CAMBER ANGLE | C | 0°15'00.0" | 0°15'00.0" | 0°15'00.0" | 0°30'00.0" | 0°30'00.0" | 0°30'00.0" | 1°15'00.0" | 1°15'00.0" | 1°15'00.0" |
| RING STIFFENER SPACING - TOP | D | 14" | 14" | 14" | 20" | 20" | 20" | 20" | 20" | 20" |
| CHORD DIAMETER AT BASE PLATE | E | 8.0" | 8.0" | 8.69" | 9.39" | 10.09" | 10.79" | 11.49" | 12.19" | 12.89" |
| CHORD WALL THICKNESS AT BASE PLATE | F | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.1875" | 0.25" | 0.25" | 0.25" |
| CHORD CAMBER ANGLE | G | 4°00'00.0" | 4°00'00.0" | 4°00'00.0" | 2°45'00.0" | 2°45'00.0" | 2°45'00.0" | 2°45'00.0" | 2°45'00.0" | 2°45'00.0" |
| RING STIFFENER SPACING - BOTTOM | H | 14" | 14" | 14" | 14" | 14" | 14" | 17" | 17" | 17" |
| DIAMETER OF CABLE GUIDE | J | 3" | 3" | 3" | 4" | 4" | 4" | 4" | 4" | 4" |

NOTES:

EACH MAST ARM CONNECTION CONSISTS OF THE FOLLOWING:
 TWO HORIZONTAL RING STIFFENER PLATES, 0.50" THICK
 TWO VERTICAL SIDE GUSSET PLATES, 0.50" THICK
 ONE BEARING PLATE, 2" THICK

MAST ARM CHORD MEMBERS ARE WELDED TO A 2" THICK CHORD BASE PLATE, WHICH IS BOLTED TO THE BEARING PLATE BY A SPECIFIED NUMBER OF BOLTS.

FOR SECTION D-D AND DETAIL C, SEE SHEET 6 OF 12. FOR SECTION E-E (BEARING AND BASE PLATE DETAILS), SEE SHEET 4 OF 12. FOR SECTION F-F (BEARING AND BASE PLATE DETAILS), SEE SHEET 5 OF 12.

① DISTANCE TO MAST ARM REFERENCE LINE. THE REFERENCE LINE IS LOCATED ON THE PLANE OF WHERE THE RESPECTIVE MAST ARM CHORD MEMBER MEETS THE BASE PLATE.

② "J" DIAMETER SCHEDULE 40 STEEL PIPE CABLE GUIDE, BEND INTO A 90° CONFIGURATION. PROJECT CABLE GUIDE 6" BEYOND TOP CHORD BEARING PLATE. SEE SHEET 4 OF 12 FOR CONNECTION DETAIL TO BEARING PLATE. BREAK EDGES OF GUIDE.

APPROVED 02-27-2024


Rom S. [Signature]
 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
 MAST ARM CONNECTION DETAILS
 FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
 REFERENCE
 2565

STANDARD
 PLATE
 NO.
8124A
 3 OF 12

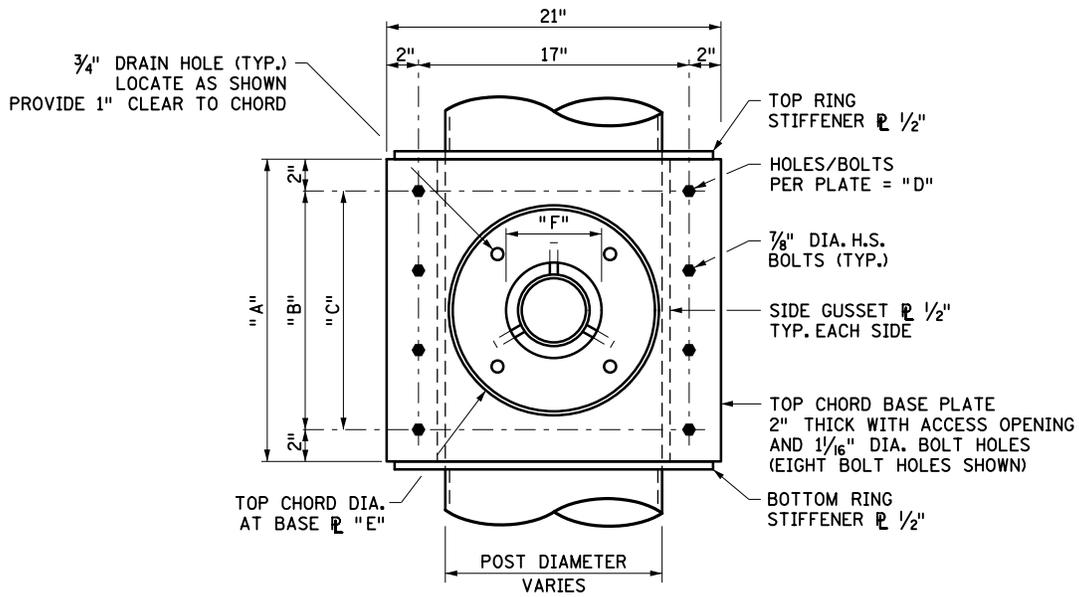

SECTION E-E - BASE PLATE
55' MAST ARM SHOWN; 15' TO 50' SIMILAR

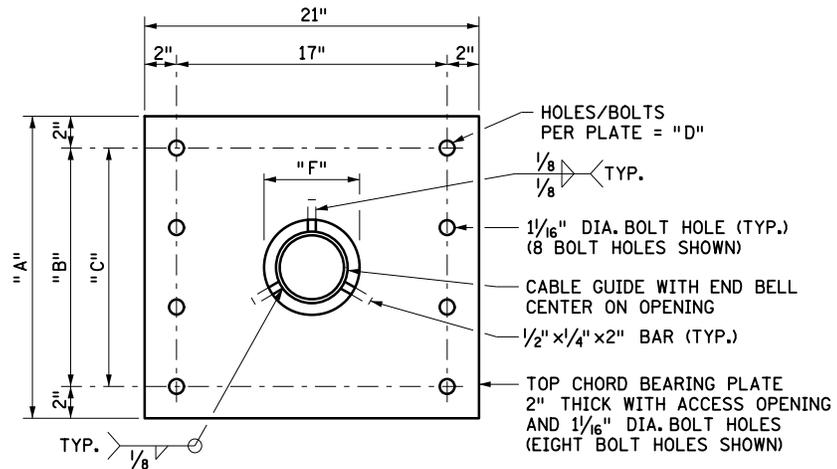

TOP CHORD BEARING PLATE DETAILS
55' MAST ARM SHOWN; 15' TO 50' SIMILAR

MAST ARM CONNECTIONS DIMENSIONS

| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | | | | | |
|---------------------------------|-----------|--------------------|--------------------|--------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | | 15' | 20' | 25' | 30' | 35' | 40' | 45' | 50' | 55' |
| CONNECTION/BEARING PLATE HEIGHT | A | 13" | 13" | 13" | 19" | 19" | 19" | 19" | 19" | 19" |
| TOTAL HOLE SPACING VERTICAL | B | 9" | 9" | 9" | 15" | 15" | 15" | 15" | 15" | 15" |
| HOLE SPACING | C | 2 SPS. ø 4 1/2" | 2 SPS. ø 4 1/2" | 2 SPS. ø 4 1/2" | 3 SPS. ø 5" |
| HOLES PER PLATE | D | 6 | 6 | 6 | 8 | 8 | 8 | 8 | 8 | 8 |
| TOP CHORD O.D. AT BASE PLATE | E | 8.0" | 8.3" | 9.0" | 9.7" | 10.4" | 11.1" | 11.8" | 12.5" | 13.2" |
| ACCESS OPENING | F | 4.5" | 4.5" | 4.5" | 6" | 6" | 6" | 6" | 6" | 6" |

APPROVED 02-27-2024


Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
TOP CHORD CONNECTION DETAILS
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.
8124A
4 OF 12

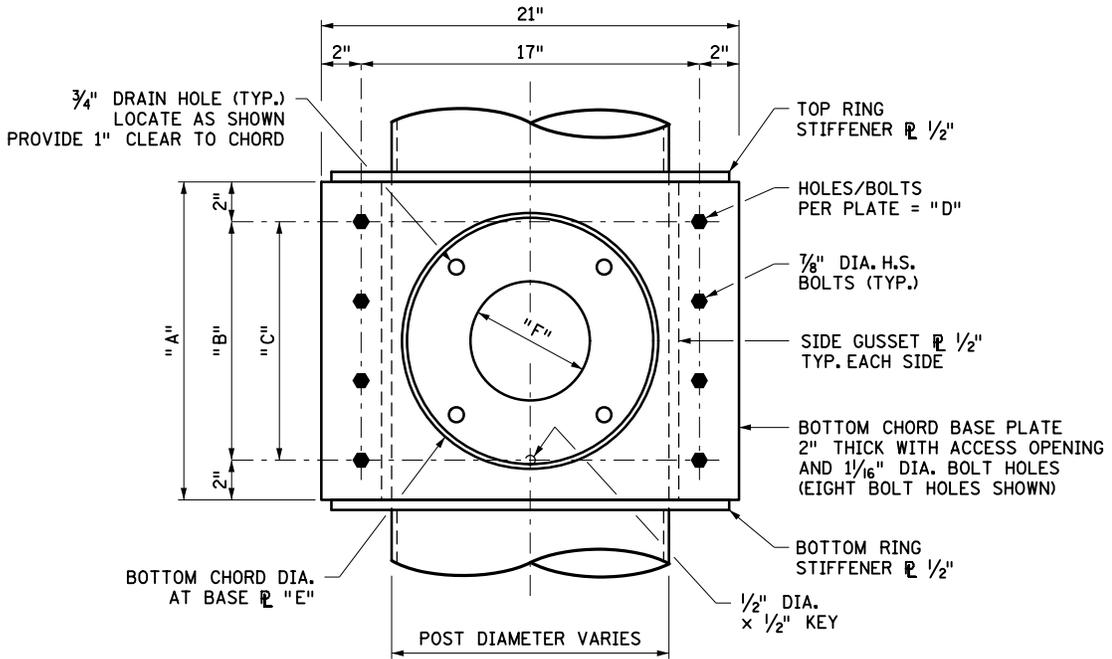

SECTION F-F - BASE PLATE
55' MAST ARM SHOWN; 15' TO 50' SIMILAR

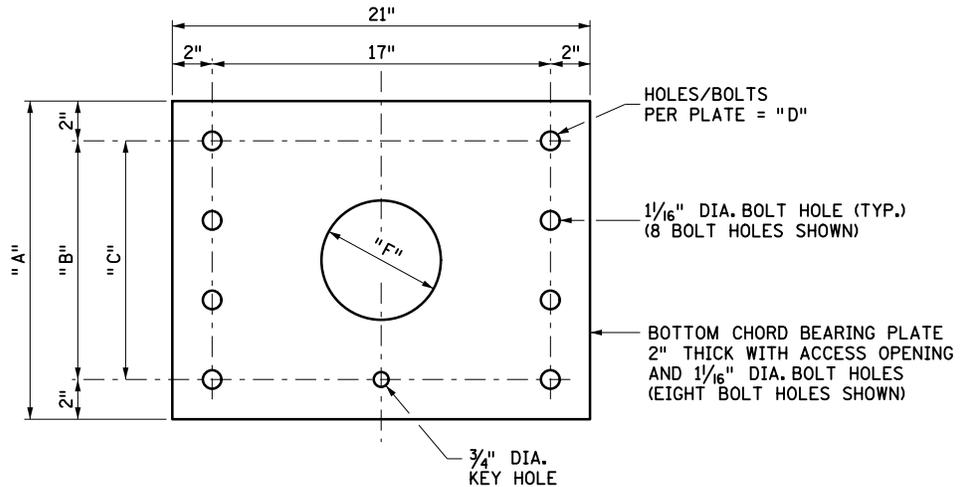

BOTTOM CHORD BEARING PLATE DETAILS
55' MAST ARM SHOWN; 15' TO 50' SIMILAR


| MAST ARM CONNECTIONS DIMENSIONS | | | | | | | | | | |
|---------------------------------|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------|----------------|----------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | | | | | |
| | | 15' | 20' | 25' | 30' | 35' | 40' | 45' | 50' | 55' |
| CONNECTION/BEARING PLATE HEIGHT | A | 13" | 13" | 13" | 13" | 13" | 13" | 16" | 16" | 16" |
| TOTAL HOLE SPACING VERTICAL | B | 9" | 9" | 9" | 9" | 9" | 9" | 12" | 12" | 12" |
| HOLE SPACING | C | 2 SPS. ø 4 1/2" | 3 SPS. ø 4" | 3 SPS. ø 4" | 3 SPS. ø 4" |
| HOLES PER PLATE | D | 6 | 6 | 6 | 6 | 6 | 6 | 8 | 8 | 8 |
| BOTTOM CHORD O.D. AT BASE PLATE | E | 8.0" | 8.0" | 8.69" | 9.39" | 10.09" | 10.79" | 11.49" | 12.19" | 12.89" |
| ACCESS OPENING | F | 4.5" | 4.5" | 4.5" | 4.5" | 4.5" | 4.5" | 6" | 6" | 6" |

APPROVED 02-27-2024
Rom S
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
BOTTOM CHORD CONNECTION DETAILS
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8124A
5 OF 12

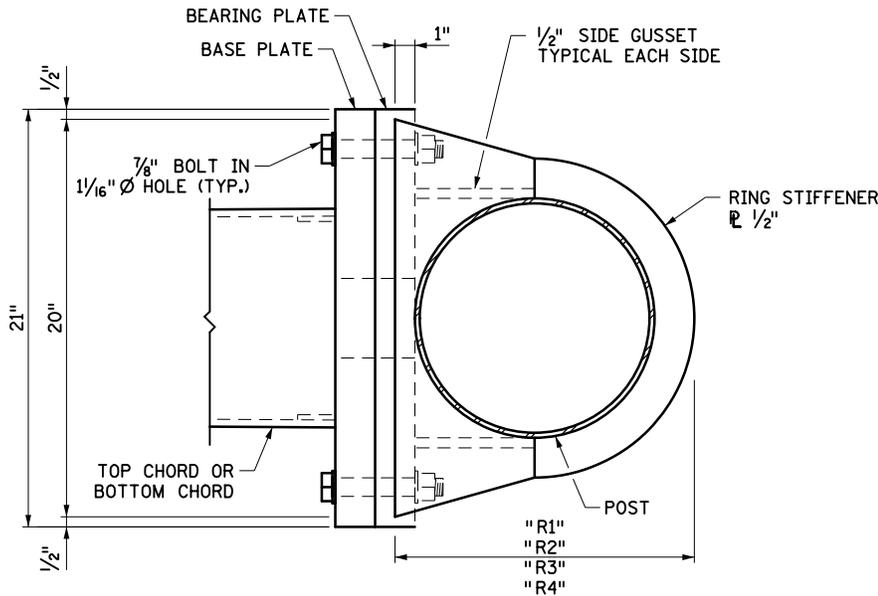


SECTION D-D
CABLE GUIDE NOT SHOWN FOR CLARITY

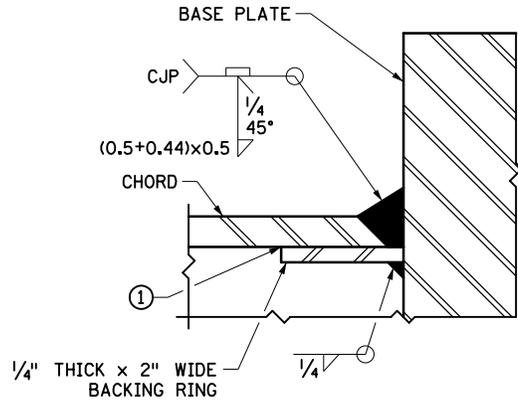

DETAIL C
BASE PLATE WELD DETAIL

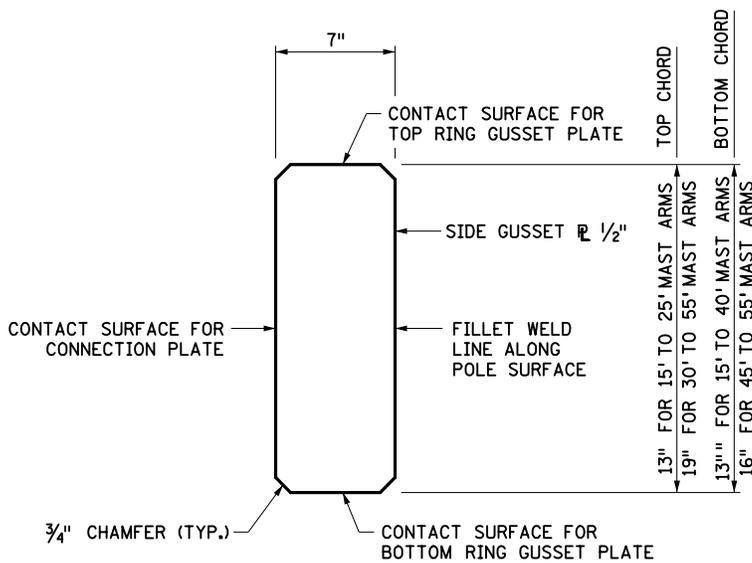

SIDE GUSSET PLATE

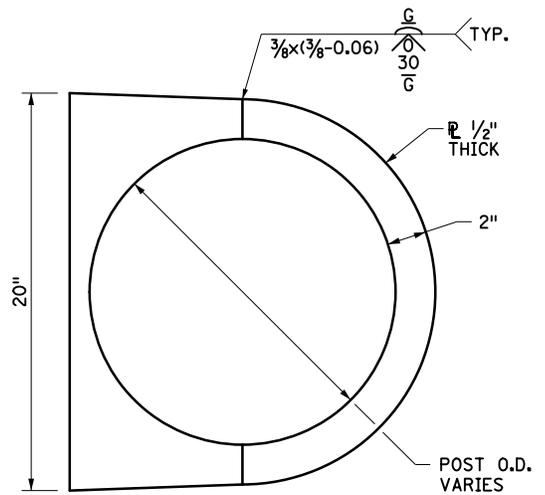

RING STIFFENER

| MAST ARM CONNECTION | | |
|--|-----------|-------------------------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH 15' TO 55' |
| TOP CHORD - TOP RING STIFFENER PLATE | R1 | 16 1/2" |
| TOP CHORD - BOTTOM RING STIFFENER PLATE | R2 | 16 5/8" |
| BOTTOM CHORD - TOP RING STIFFENER PLATE | R3 | 16 7/8" |
| BOTTOM CHORD - BOTTOM RING STIFFENER PLATE | R4 | 17" |

NOTES:

- ① FIELD-APPLY 100% SILICONE CAULK (EXTERIOR USAGE) AT TOP OF BACKING RING ALONG ENTIRE INTERIOR CIRCUMFERENCE OF ARM.

APPROVED 02-27-2024
Rom Sln
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
STIFFENER PLATE/GUSSET PLATE CONNECTION DETAILS
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8124A
6 OF 12

FLANGE SPLICE PLATE


| POLE TYPE | MAST ARM LENGTH | TOP CHORD | | | BOTTOM CHORD | | |
|-----------|-----------------|--|--|---|--|--|---|
| | | FLANGE SPLICE PLATE DIAMETER \varnothing TF | BOLT CIRCLE DIAMETER \varnothing TS | CHORD DIAMETER @ SPLICE \varnothing TC | FLANGE SPLICE PLATE DIAMETER \varnothing BF | BOLT CIRCLE DIAMETER \varnothing BS | CHORD DIAMETER @ SPLICE \varnothing BC |
| TS55 | 55' 0" | 19" | 16" | 11.8" | 19" | 16" | 11.5" |

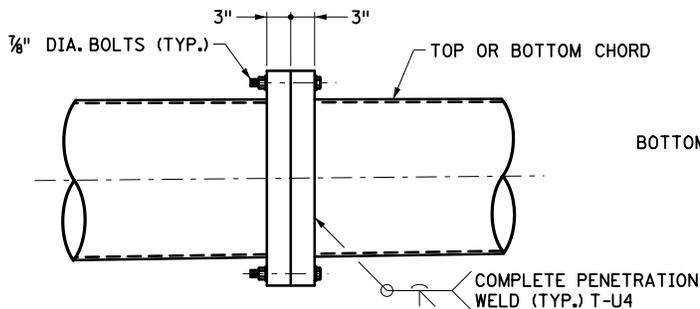


FLANGE SPLICE

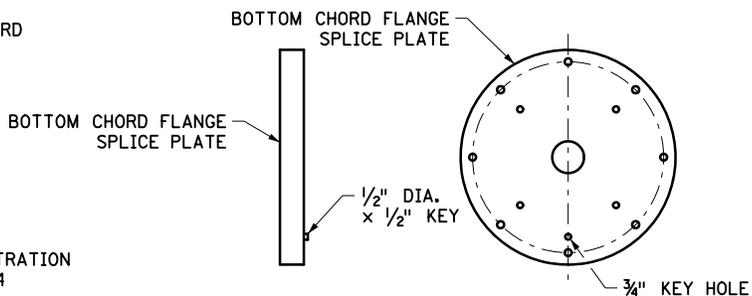

SPLICE KEY

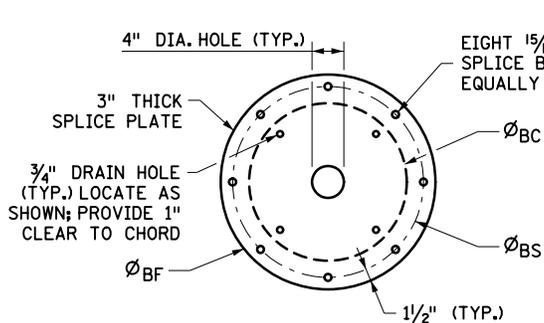

BOTTOM CHORD FLANGE SPLICE PLATE

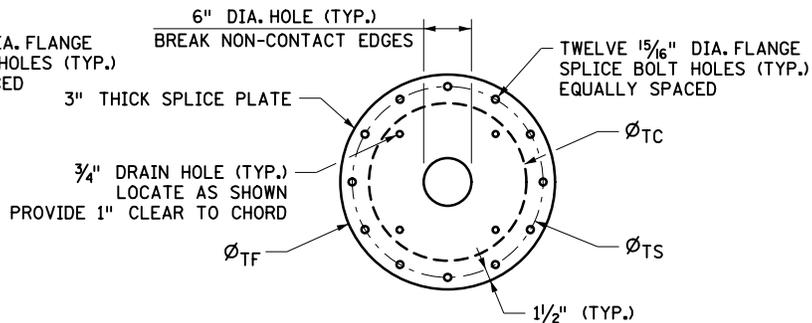

TOP CHORD FLANGE SPLICE PLATE

APPROVED 02-27-2024










 STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

POLE AND MAST ARM TYPE TS
 FLANGE SPLICE DETAILS
 FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
 REFERENCE
 2565

STANDARD
 PLATE
 NO.
8124A
 7 OF 12

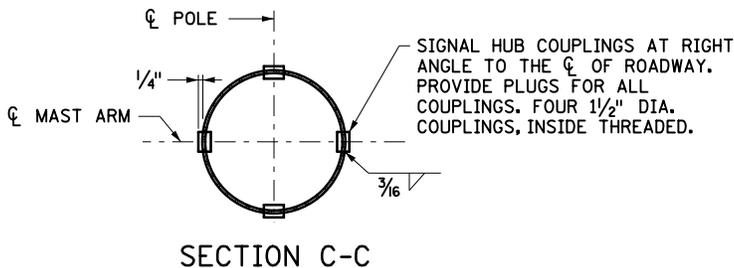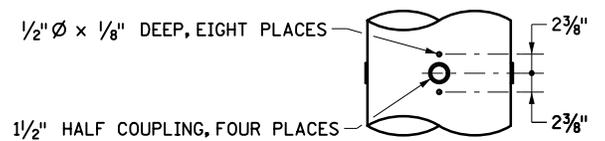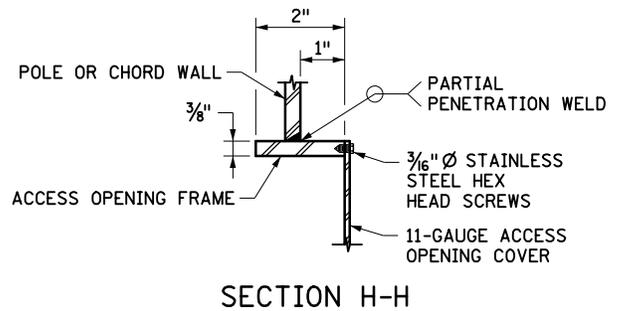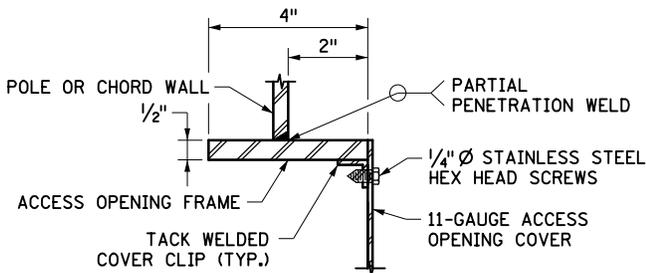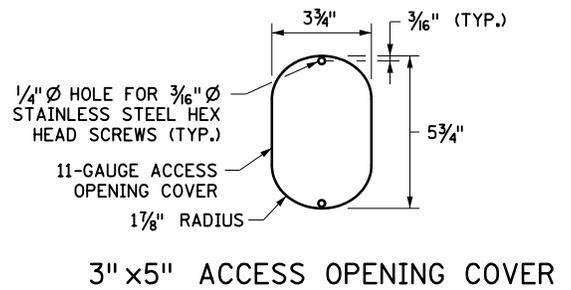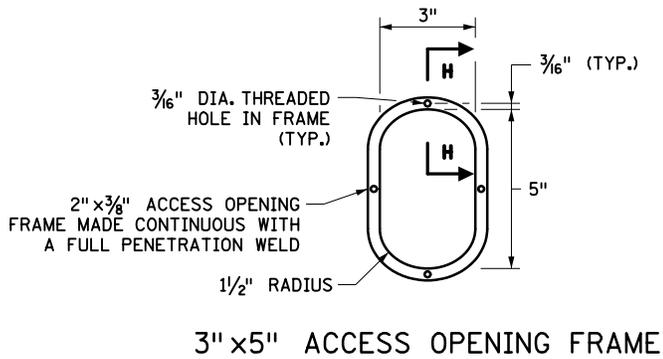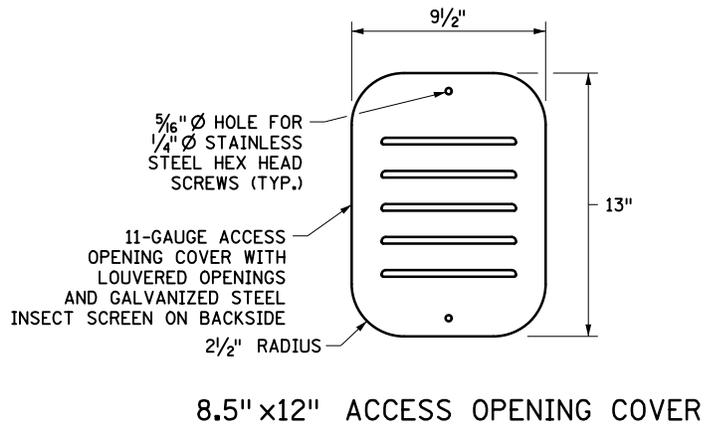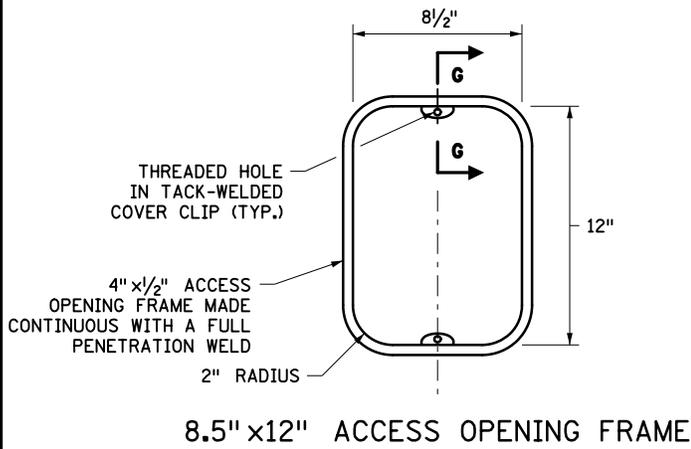

NOTES:
PLACE FASTENERS TO A SNUG-TIGHT CONDITION.

APPROVED 02-27-2024

Rom S...

STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

POLE AND MAST ARM TYPE TS
ACCESS OPENING AND ATTACHMENT DETAILS
FOR MAST ARM LENGTHS 15' TO 55'


SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.
8124A
8 OF 12


3/4" Ø DRAIN HOLE (TYP.), LOCATE AS SHOWN, PROVIDE 1" CLEAR TO CHORD

18" Ø TOP PLATE; CENTER ON POLE

6" Ø HOLE; BREAK EDGES

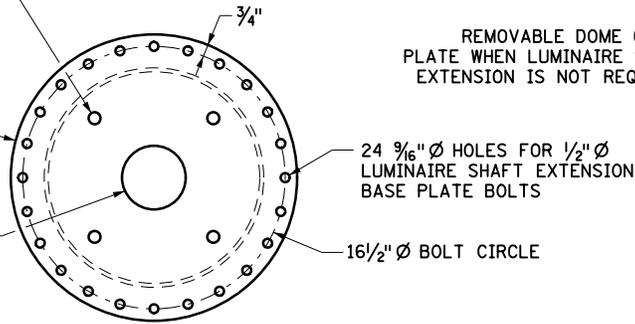

TOP VIEW

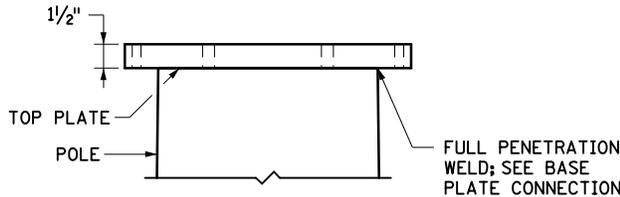


SIDE VIEW

POLE TOP WITH LUMINAIRE SHAFT EXTENSION
SHAFT EXTENSION NOT SHOWN FOR CLARITY


REMOVABLE DOME COVER PLATE WHEN LUMINAIRE SHAFT EXTENSION IS NOT REQUIRED

24 3/16" Ø HOLES FOR 1/2" Ø LUMINAIRE SHAFT EXTENSION BASE PLATE BOLTS

16 1/2" Ø BOLT CIRCLE




TOP VIEW

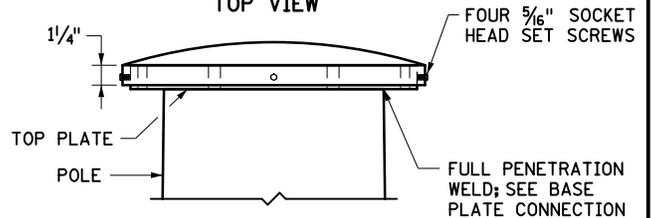


SIDE VIEW

POLE TOP WITHOUT LUMINAIRE SHAFT EXTENSION

POLE CAP DETAIL

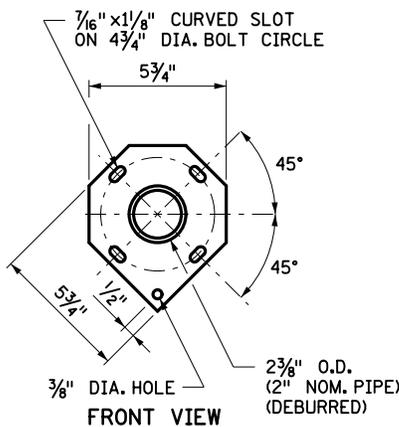


FRONT VIEW

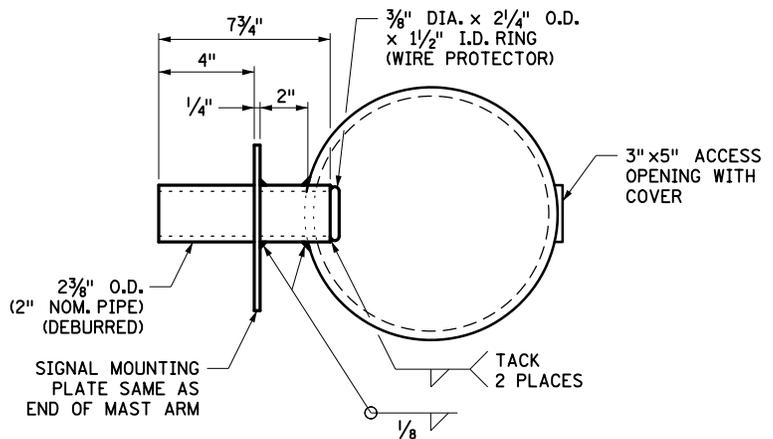


SIGNAL MOUNTING DETAIL

MID MAST ARM

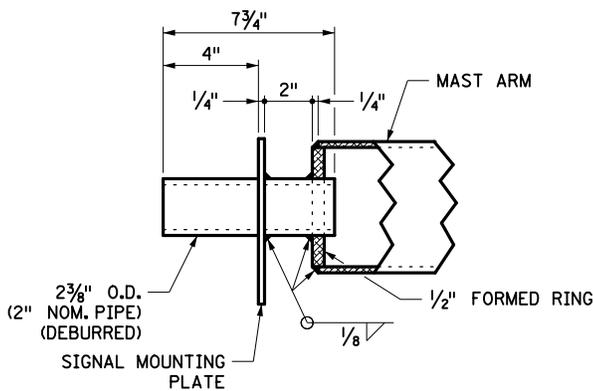

SIDE VIEW

SIGNAL MOUNTING DETAIL
END OF MAST ARM

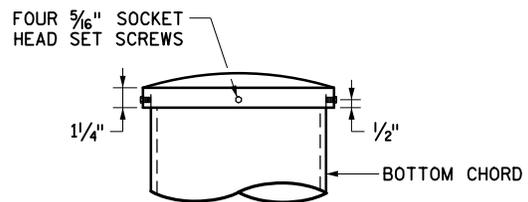

REMOVABLE CHORD CAP DETAIL

APPROVED 02-27-2024

Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

POLE AND MAST ARM TYPE TS


MISCELLANEOUS DETAILS
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.

8124A


9 OF 12

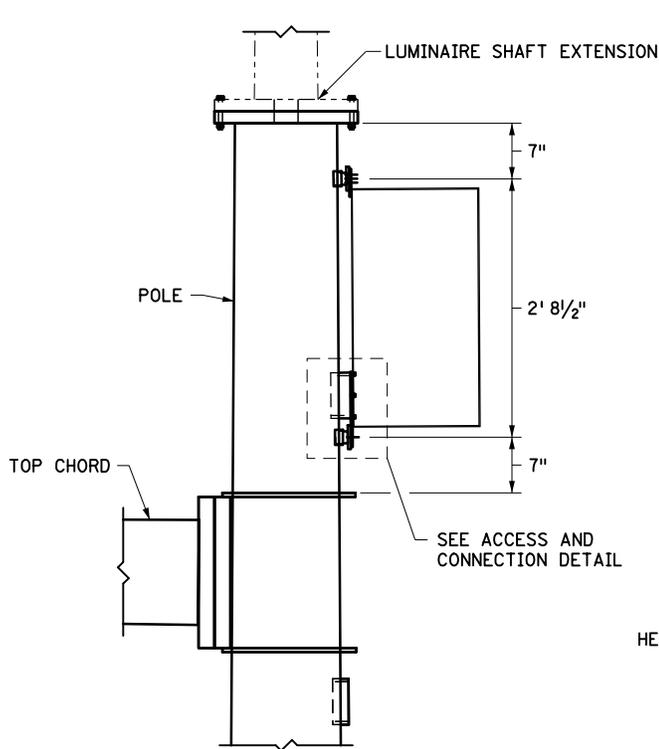


CCTV CABINET DETAIL

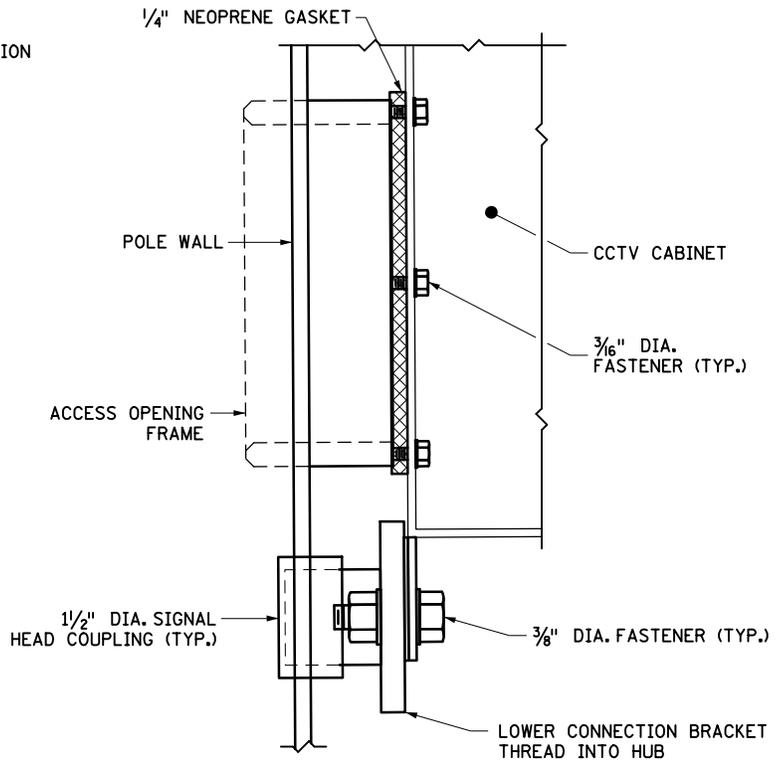

ACCESS AND CONNECTION DETAIL
LOWER CONNECTION SHOWN; UPPER SIMILAR

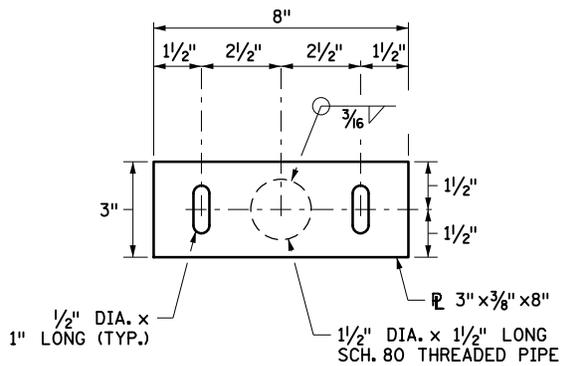

UPPER CONNECTION BRACKET
ONE REQUIRED PER POLE

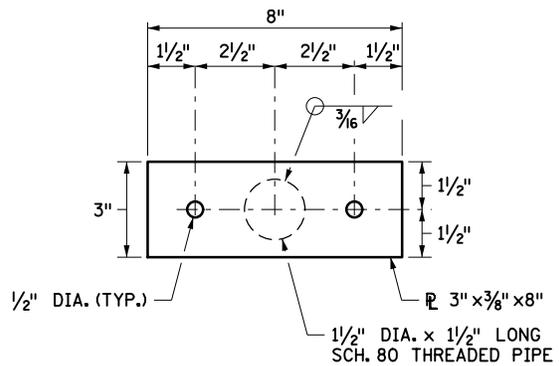

LOWER CONNECTION BRACKET
ONE REQUIRED PER POLE

NOTES:

PROVIDE DETAILS ON THIS SHEET IF POLE IS TO RECEIVE A CCTV CABINET.


FURNISH AND INSTALL COMMON STRUCTURAL STEEL BOLTS, NUTS, AND WASHERS IN ACCORDANCE WITH SPEC. 3391 FOR THE CCTV CABINET TO POLE BRACKETING CONNECTIONS.

APPROVED 02-27-2024
Rom Sln
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
CCTV CONNECTION DETAILS (1 OF 2)
FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8124A
11 OF 12

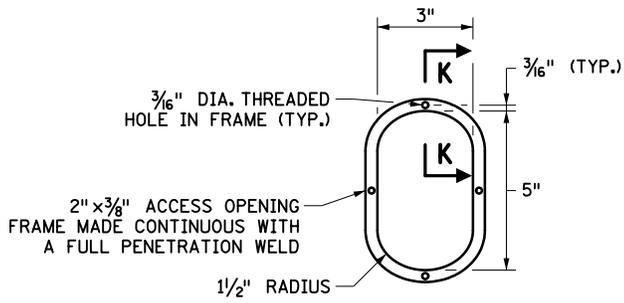

3" x 5" ACCESS OPENING FRAME

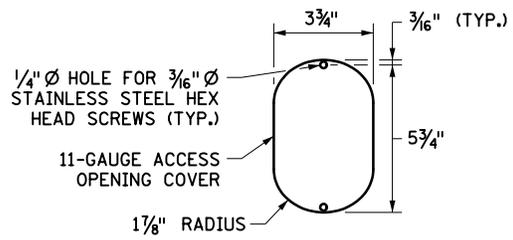

3" x 5" ACCESS OPENING COVER PLATE
 PROVIDE COVER PLATE WHEN CCTV CABINET IS NOT REQUIRED

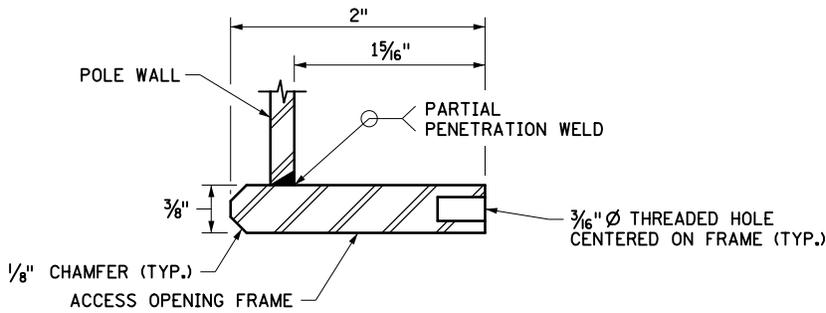

SECTION K-K


APPROVED 02-27-2024

 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
 CCTV CONNECTION DETAILS (2 OF 2)
 FOR MAST ARM LENGTHS 15' TO 55'

SPECIFICATION
 REFERENCE
 2565

STANDARD
 PLATE
 NO.
8124A
 12 OF 12

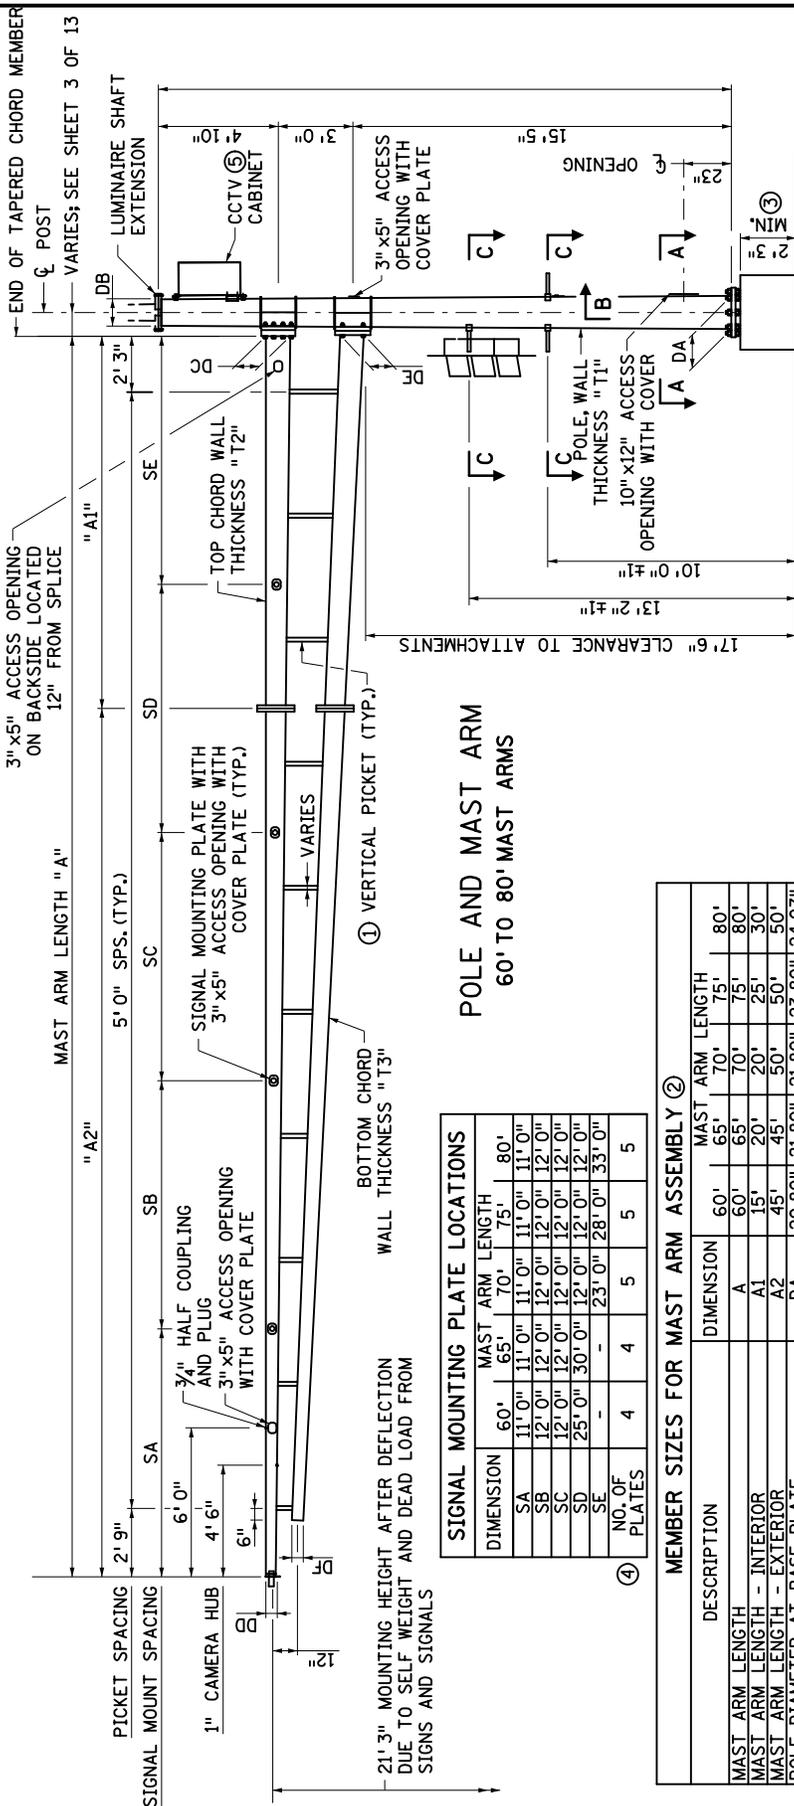

FURNISH AND INSTALL HIGH STRENGTH STRUCTURAL STEEL BOLTS, NUTS, WASHERS, AND TENSION INDICATORS IN ACCORDANCE WITH SPEC. 3391 AND 2404 FOR THE STRUCTURAL BOLTING OF MAST ARM SPLICES, MAST ARM TO POLE CONNECTIONS, AND LUMINAIRE AND CAMERA SHAFT EXTENSIONS TO POLES. PLACE DIRECT TENSION INDICATORS (DTI) UNDER THE STRUCTURAL BOLT HEADS WITH THE BUMPS TOUCHING THE UNDERSIDE OF THE BOLT HEAD. TIGHTEN THE CONNECTIONS BY TURNING THE STRUCTURAL HEAVY HEX NUTS. DO NOT ROTATE THE BOLT HEADS. USE AN INSPECTION PROCEDURE FOR DTI IN ACCORDANCE WITH SPEC. 2402.

WELD IN ACCORDANCE WITH THE AMERICAN WELDING SOCIETY STRUCTURAL WELDING CODE (STEEL) ANS/AWS D1.1 (CURRENT EDITION).

FABRICATE ROUND TAPERED POLE AND MAST ARM ELEMENTS BY LONGITUDINAL SEAM WELDING WITH 60% PENETRATION EXCEPT WITHIN 6" OF FULL-PENETRATION CIRCUMFERENTIAL GROOVE WELDS. FULL-PENETRATION GROOVE WELDS ARE REQUIRED WITHIN THIS 6" REGION.

PERFORM A WIND LOAD ANALYSIS FOR COMPONENTS MOUNTED TO THE MAST ARM. LEVEL THE POLE AND BASE PLATE BY ADJUSTING THE LEVELING NUTS. TAPER POLE MEMBER AND MAST ARM CHORD MEMBERS AT A RATE OF 0.14 INCHES/FOOT.

FOR SECTION A-A AND SECTION B-B, SEE SHEET 2 OF 13. FOR SECTION C-C, SEE SHEET 9 OF 13.

**POLE AND MAST ARM
60' TO 80' MAST ARMS**

SIGNAL MOUNTING PLATE LOCATIONS

| DIMENSION | MAST ARM LENGTH |
|---------------|------------------------------------|
| SA | 60' 65' 70' 75' 80' |
| SB | 11' 0" 11' 0" 11' 0" 11' 0" 11' 0" |
| SC | 12' 0" 12' 0" 12' 0" 12' 0" 12' 0" |
| SD | 25' 0" 30' 0" 12' 0" 12' 0" 12' 0" |
| SE | 23' 0" 28' 0" 33' 0" |
| NO. OF PLATES | 4 4 5 5 5 |

MEMBER SIZES FOR MAST ARM ASSEMBLY ②

| DESCRIPTION | DIMENSION | MAST ARM LENGTH |
|--|-----------|---------------------------------------|
| MAST ARM LENGTH - INTERIOR | A | 60' 65' 70' 75' 80' |
| MAST ARM LENGTH - EXTERIOR | A1 | 15' 20' 25' 30' |
| POLE DIAMETER AT BASE PLATE | A2 | 45' 45' 50' 50' 50' |
| POLE DIAMETER AT CAP | DA | 20.80" 21.80" 21.80" 23.80" 24.07" |
| DIAMETER OF TOP CHORD AT BASE PLATE | DB | 17.54" 18.54" 18.54" 20.54" 20.81" |
| DIAMETER OF BOTTOM CHORD AT TIP | DC | 19.0" 20.0" 20.0" 22.0" 23.0" |
| DIAMETER OF BOTTOM CHORD AT BASE PLATE | DD | 10.6" 10.9" 10.2" 11.5" 11.8" |
| DIAMETER OF BOTTOM CHORD AT TIP | DE | 13.59" 14.29" 14.99" 15.69" 16.39" |
| WALL THICKNESS OF POLE | DF | 5.5" 5.5" 5.5" 5.5" 5.5" |
| WALL THICKNESS OF TOP CHORD | T1 | 0.25" 0.3125" 0.3125" 0.3125" 0.3125" |
| WALL THICKNESS OF BOTTOM CHORD | T2 | 0.25" 0.3125" 0.3125" 0.3125" 0.3125" |
| | T3 | 0.25" 0.25" 0.25" 0.3125" 0.3125" |

- NOTES:**
- SEE SHEET 8 OF 13 FOR VERTICAL PICKETS DIMENSIONS. PLACE AT THE SPACING SHOWN.
 - DIAMETER DIMENSIONS PROVIDED ARE THE OUTSIDE DIAMETER.
 - INCREASE FOUNDATION PROJECTION AS REQUIRED TO PROVIDE A VERTICAL CLEARANCE FROM THE BOTTOM OF ALL SIGNS AND SIGNAL HEADS (INCLUDING BACKGROUND SHIELDS) TO THE PAVEMENT OF NOT LESS THAN 17.50' NOR MORE THAN 19.00'.
 - INCLUDES END MAST ARM SIGNAL MOUNT.
 - PROVIDE BRACKETING AND HARDWARE FOR CCTV CABINET ON POLES SHOWN ON THE PLANS. CCTV CABINET BY OTHERS.
 - FURNISH AND INSTALL HIGH-STRENGTH, LOW-ALLOY, COLUMBIUM-VANADIUM STRUCTURAL STEEL IN ACCORDANCE WITH SPEC. 3310. 50,000 PSI MINIMUM YIELD.
 - GALVANIZE HARDWARE IN ACCORDANCE WITH SPEC. 3392. GALVANIZE STEEL COMPONENTS IN ACCORDANCE WITH SPEC. 3394 AFTER FABRICATION. PROVIDE VENT AND DRAIN HOLES FOR THE HOT-DIP GALVANIZING PROCESS.

APPROVED 02-27-2024


 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
 MAST ARM ASSEMBLY
 FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION REFERENCE
 2565


STANDARD PLATE NO.
8125A
 1 OF 13

| POLE TYPE | MAST ARM LENGTH | POLE CAMBER ANGLE ∅ |
|--------------------------------|------------------|------------------------|
| TS60, TS65, TS70 TS75, TS80 | 60' 0" TO 80' 0" | 0°30'00.0" |

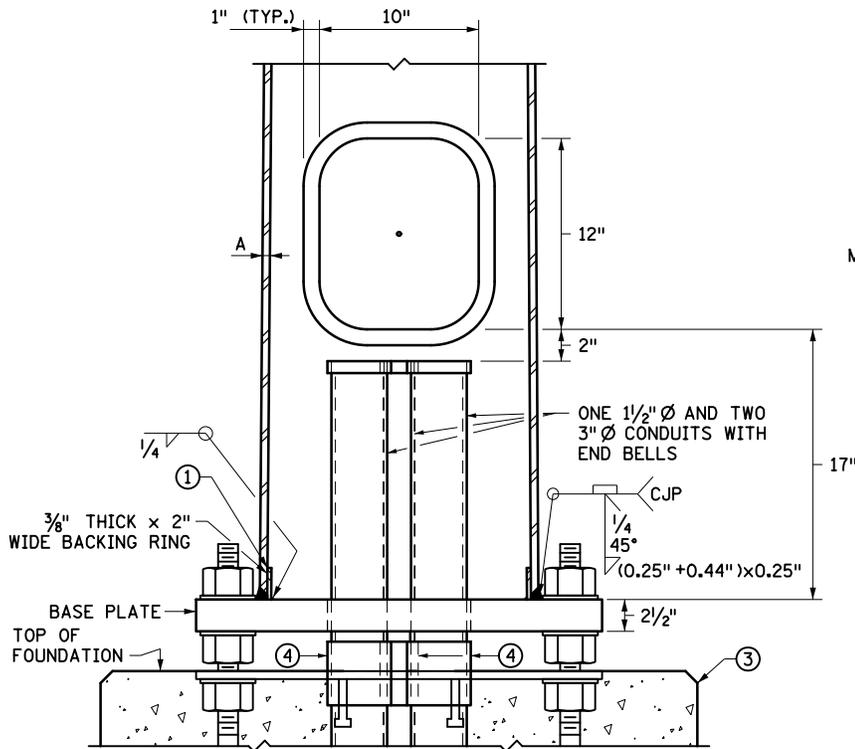

SECTION B-B

FOUNDATION REINFORCEMENT NOT SHOWN FOR CLARITY

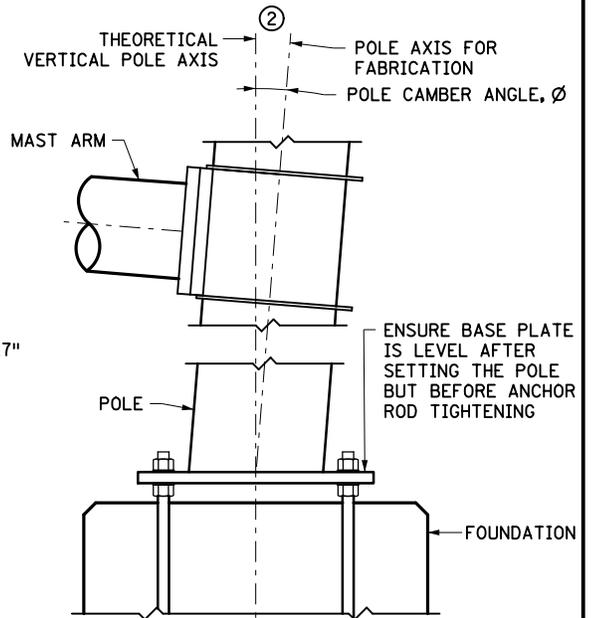


SCHEMATIC OF POLE ALIGNMENT

NOT TO SCALE

| POLE TYPE | POLE WALL THICKNESS A |
|-----------|--------------------------|
| TS60 | 0.25" |
| TS65 | 0.3125" |
| TS70 | 0.3125" |
| TS75 | 0.3125" |
| TS80 | 0.3125" |

| POLE TYPE | BASE PLATE DIAMETER ∅ _A | ANCHOR ROD DIAMETER ∅ _B | DIAMETER OF ANCHOR ROD HOLE ∅ _C | ANCHOR ROD PLACEMENT DIAMETER ∅ _D |
|-----------|---------------------------------------|---------------------------------------|---|---|
| TS60 | 37" | 1 1/2" | 1 5/8" | 29" |
| TS65 | 37" | 1 3/4" | 1 7/8" | 29" |
| TS70 | 39" | 2" | 2 1/8" | 31" |
| TS75 | 41" | 2" | 2 1/8" | 33" |
| TS80 | 41" | 2 1/4" | 2 3/8" | 33" |

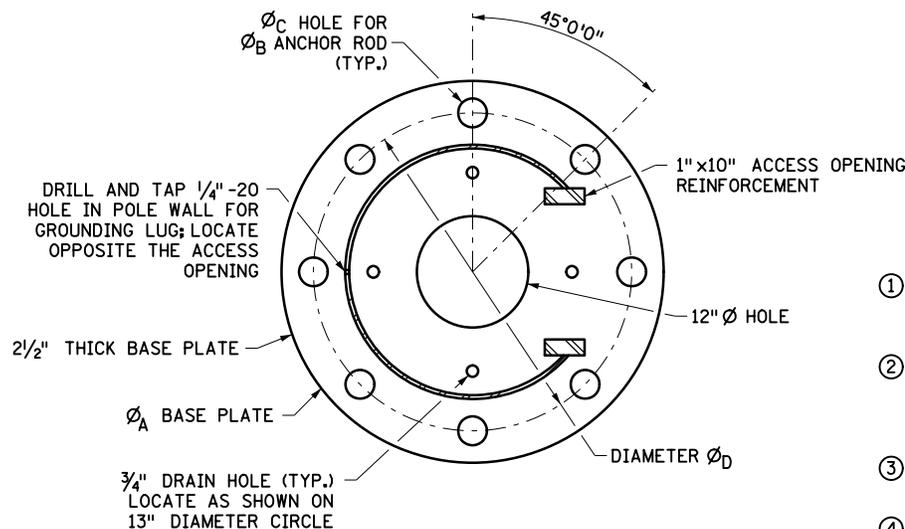

SECTION A-A

NOTES:

- FIELD-APPLIED 100% SILICONE CAULK (EXTERIOR USAGE) AT TOP OF BACKING RING ALONG ENTIRE CIRCUMFERENCE.
- POLE ROTATION IS ABOUT A HORIZONTAL AXIS ORIENTED PERPENDICULAR TO MAST ARM AXIS. SENSE OF ROTATION IS SUCH THAT TIP OF MAST ARM WILL BE RAISED.
- SEE STANDARD PLAN 5-297.861 FOR PVC CONDUIT AND COUPLING INSTALLATION REQUIREMENTS.
- PVC COUPLING.

APPROVED 02-27-2024

Rom S
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

POLE AND MAST ARM TYPE TS

POLE DETAILS
FOR MAST ARM LENGTHS 60' TO 80'


SPECIFICATION
REFERENCE
2565

REVISED
06-10-2024 K.Y.

STANDARD
PLATE
NO.

8125A

2 OF 13

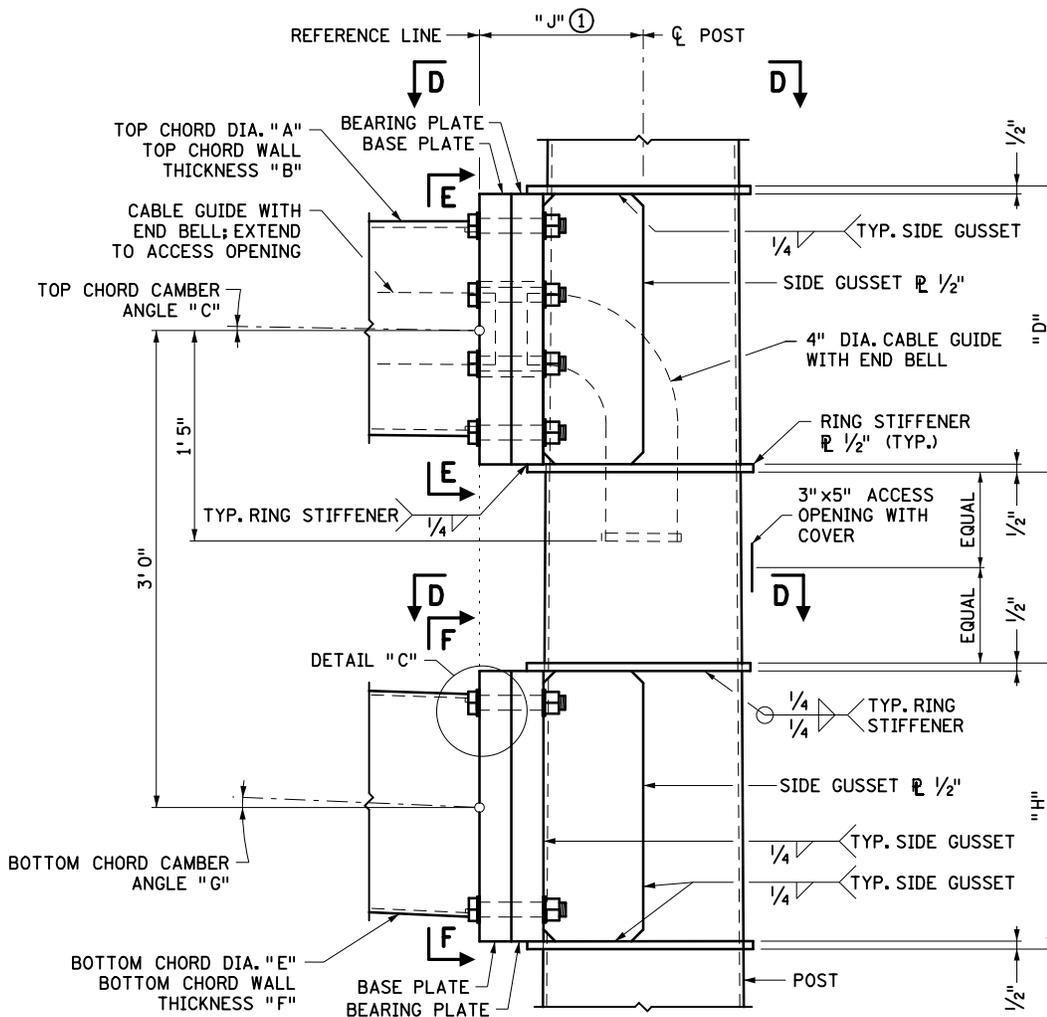

SCHEMATIC POST/BEAM CONNECTION DETAIL
 BOLT CONFIGURATION VARIES BY MAST ARM LENGTH
 SEE SHEETS 4 AND 5 OF 13 FOR DETAILS

| MAST ARM CONNECTIONS DIMENSIONS | | | | | | |
|---|-----------|-----------------|------------|------------|------------|------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| TOP CHORD DIAMETER AT BASE PLATE | A | 19.0" | 20.0" | 20.0" | 22.0" | 23.0" |
| TOP CHORD WALL THICKNESS AT BASE PLATE | B | 0.25" | 0.3125" | 0.3125" | 0.375" | 0.375" |
| TOP CHORD CAMBER ANGLE | C | 1°00'00.0" | 1°00'00.0" | 1°15'00.0" | 1°15'00.0" | 1°30'00.0" |
| RING STIFFENER SPACING - TOP | D | 25" | 27" | 27" | 29" | 35" |
| BOTTOM CHORD DIAMETER AT BASE PLATE | E | 13.52" | 14.22" | 14.92" | 15.62" | 16.32" |
| BOTTOM CHORD WALL THICKNESS AT BASE PLATE | F | 0.25" | 0.25" | 0.3125" | 0.3125" | 0.3125" |
| BOTTOM CHORD CAMBER ANGLE | G | 3°00'00.0" | 2°45'00.0" | 2°45'00.0" | 2°45'00.0" | 3°00'00.0" |
| RING STIFFENER SPACING - BOTTOM | H | 20" | 20" | 20" | 23" | 25" |
| DISTANCE FROM ϕ POST TO REFERENCE LINE | J | 13.375" | 13.875" | 13.875" | 14.875" | 15" |

NOTES:

EACH MAST ARM CONNECTION CONSISTS OF THE FOLLOWING:
 TWO HORIZONTAL RING STIFFENER PLATES, 0.50" THICK
 TWO VERTICAL SIDE GUSSET PLATES, 0.50" THICK
 ONE BEARING PLATE, 2" THICK

MAST ARM CHORD MEMBERS ARE WELDED TO A 2" THICK CHORD
 BASE PLATE, WHICH IS BOLTED TO THE BEARING PLATE BY A
 SPECIFIED NUMBER OF BOLTS.

FOR SECTION D-D AND DETAIL C, SEE SHEET 6 OF 13. FOR
 SECTION E-E (BEARING AND BASE PLATE DETAILS), SEE SHEET
 4 OF 13. FOR SECTION F-F (BEARING AND BASE PLATE
 DETAILS), SEE SHEET 5 OF 13.

- ① DISTANCE TO MAST ARM REFERENCE LINE. THE REFERENCE LINE IS LOCATED ON THE PLANE OF WHERE THE RESPECTIVE MAST ARM CHORD MEMBER MEETS THE BASE PLATE.
- ② 4" DIAMETER SCHEDULE 40 STEEL PIPE CABLE GUIDE, BEND INTO A 90° CONFIGURATION. PROJECT CABLE GUIDE 6" BEYOND TOP CHORD BEARING PLATE. SEE SHEET 4 OF 13 FOR CONNECTION DETAIL TO BEARING PLATE. BREAK EDGES OF GUIDE.

APPROVED 02-27-2024


Rom S...
 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
 MAST ARM CONNECTION DETAILS
 FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
 REFERENCE
 2565

STANDARD
 PLATE
 NO.
8125A
 3 OF 13

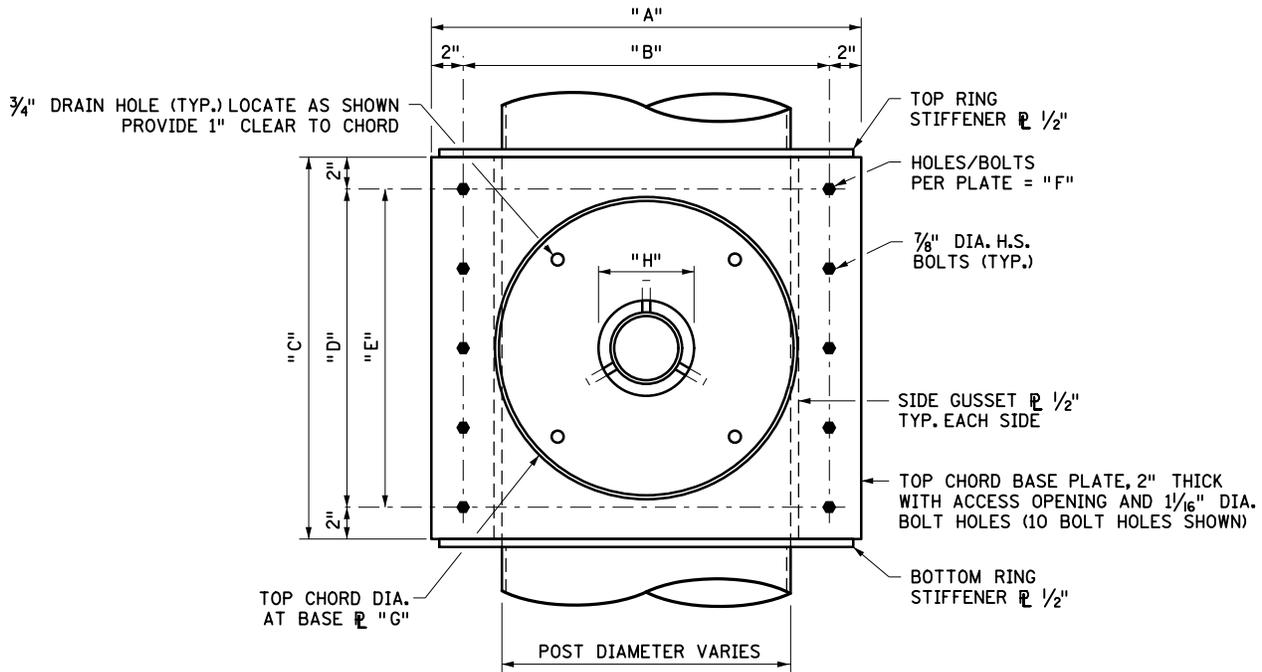

SECTION E-E - BASE PLATE
60' MAST ARM SHOWN; 65' TO 80' SIMILAR

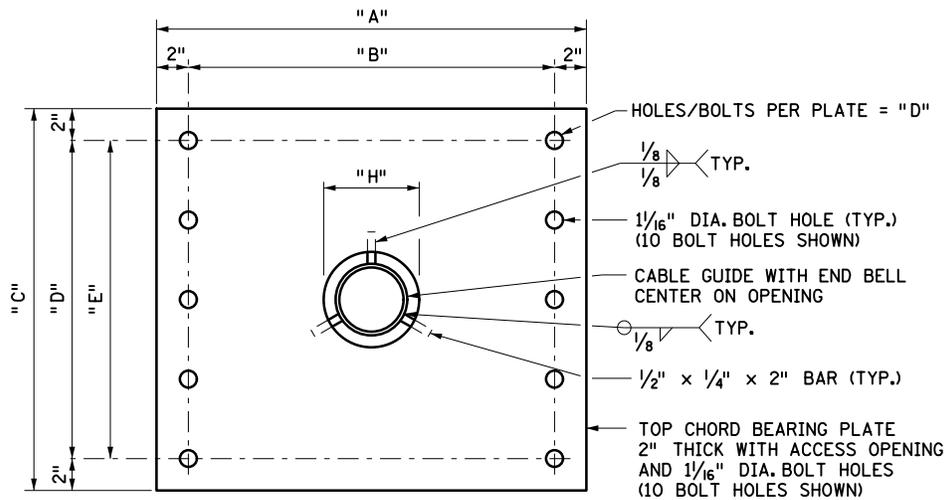

TOP CHORD BEARING PLATE DETAILS
60' MAST ARM SHOWN; 65' TO 80' SIMILAR

| MAST ARM CONNECTIONS DIMENSIONS | | | | | | |
|---------------------------------|-----------|-----------------|-----------------|-----------------|-------------|-------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| BASE/BEARING PLATE WIDTH | A | 27" | 28" | 29" | 31" | 32" |
| TOTAL HOLE SPACING HORIZONTAL | B | 23" | 24" | 25" | 27" | 28" |
| BASE/BEARING PLATE HEIGHT | C | 24" | 26" | 26" | 28" | 34" |
| TOTAL HOLE SPACING VERTICAL | D | 20" | 22" | 22" | 24" | 30" |
| HOLE SPACING | E | 4 SPS. @ 5" | 4 SPS. @ 5 1/2" | 4 SPS. @ 5 1/2" | 6 SPS. @ 4" | 6 SPS. @ 5" |
| HOLES PER PLATE | F | 10 | 10 | 10 | 14 | 14 |
| TOP CHORD O.D. AT BASE PLATE | G | 19.0" | 20.0" | 20.0" | 22.0" | 23.0" |
| ACCESS OPENING | H | 6" | 6" | 6" | 7" | 7.5" |

APPROVED 02-27-2024


Rom S. J.
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
TOP CHORD CONNECTION DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.
8125A
4 OF 13

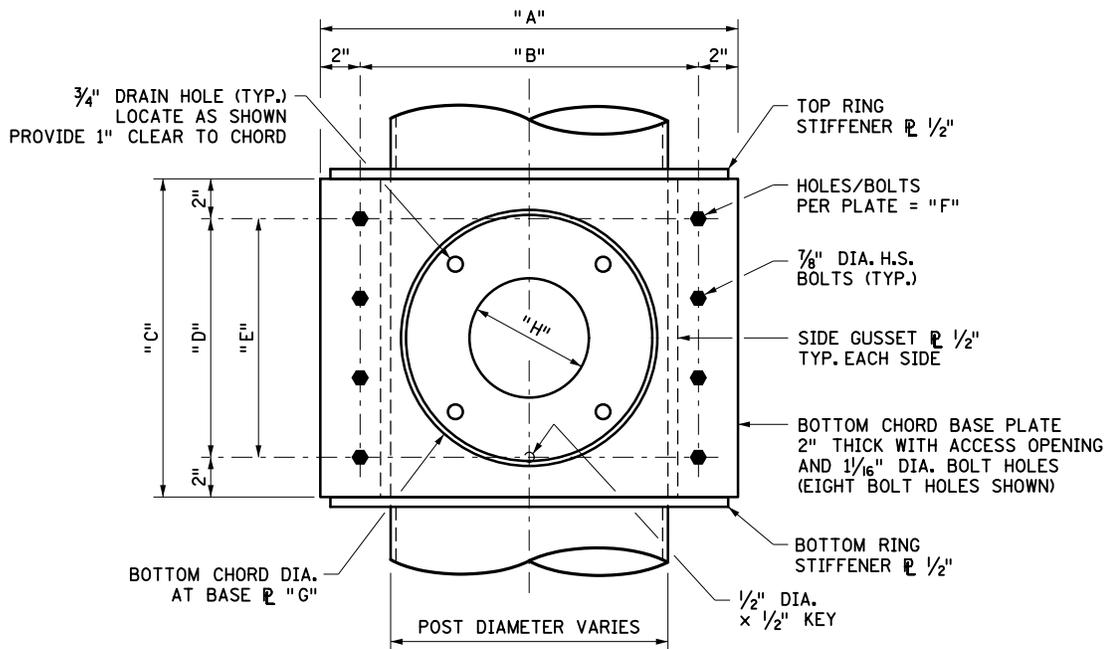

SECTION F-F - BASE PLATE
60' MAST ARM SHOWN; 65' TO 80' SIMILAR

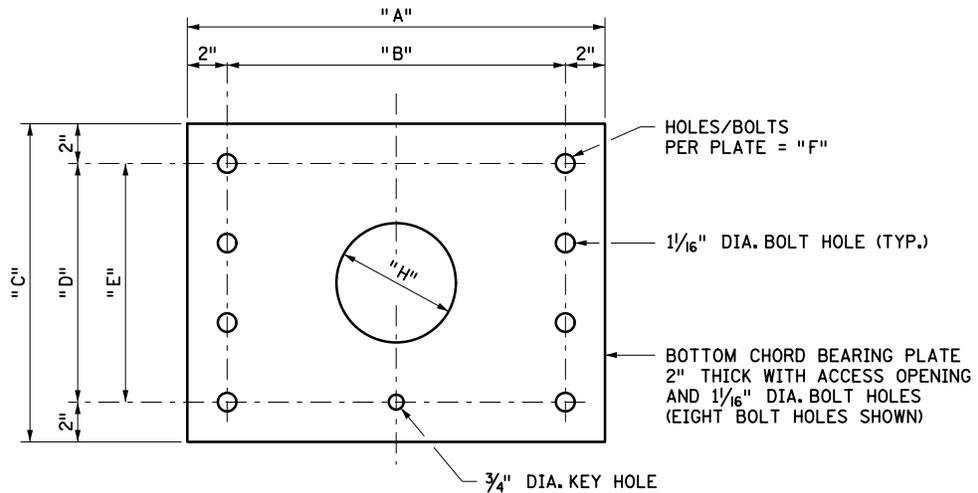

BOTTOM CHORD BEARING PLATE DETAILS
60' MAST ARM SHOWN; 65' TO 80' SIMILAR

| MAST ARM CONNECTIONS DIMENSIONS | | | | | | |
|---------------------------------|-----------|-----------------|-------------|-------------|-------------|-------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| BASE/BEARING PLATE WIDTH | A | 27" | 28" | 29" | 31" | 32" |
| TOTAL HOLE SPACING HORIZONTAL | B | 23" | 24" | 25" | 27" | 28" |
| BASE/BEARING PLATE HEIGHT | C | 19" | 19" | 19" | 22" | 24" |
| TOTAL HOLE SPACING VERTICAL | D | 15" | 15" | 15" | 18" | 20" |
| HOLE SPACING | E | 3 SPS. @ 5" | 3 SPS. @ 5" | 3 SPS. @ 5" | 3 SPS. @ 6" | 4 SPS. @ 5" |
| HOLES PER PLATE | F | 8 | 8 | 8 | 8 | 10 |
| BOTTOM CHORD O.D. AT BASE PLATE | G | 19.0" | 20.0" | 20.0" | 22.0" | 23.0" |
| ACCESS OPENING | H | 6" | 6" | 6" | 6" | 6" |

APPROVED 02-27-2024


Rom S. J.
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
BOTTOM CHORD CONNECTION DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8125A
5 OF 13

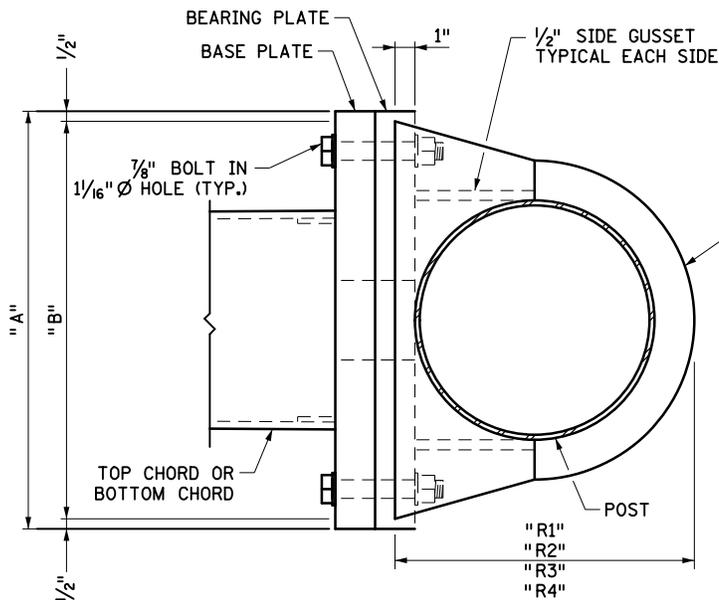


SECTION D-D
CABLE GUIDE NOT SHOWN FOR CLARITY

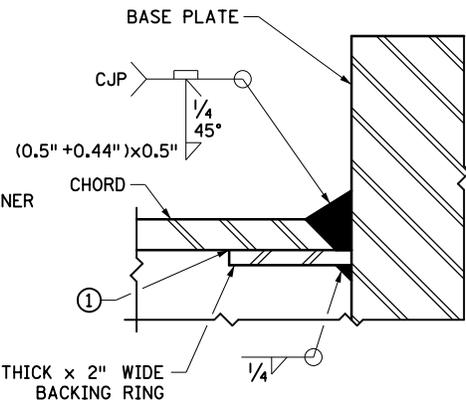

DETAIL C
BASE PLATE WELD DETAIL

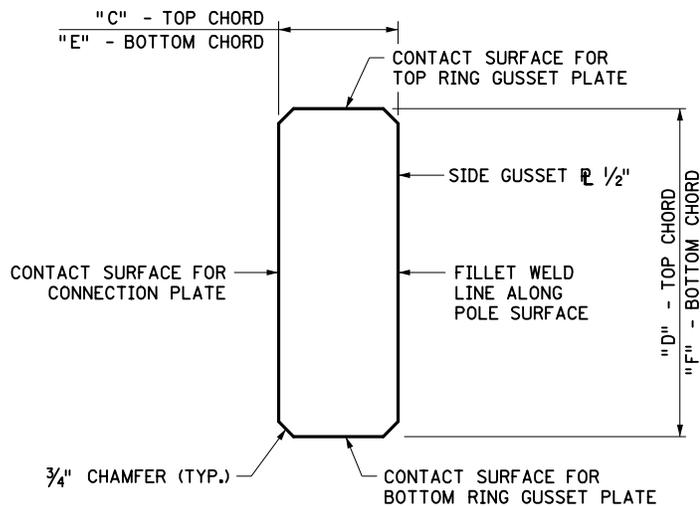

SCHEMATIC OF SIDE GUSSET PLATE

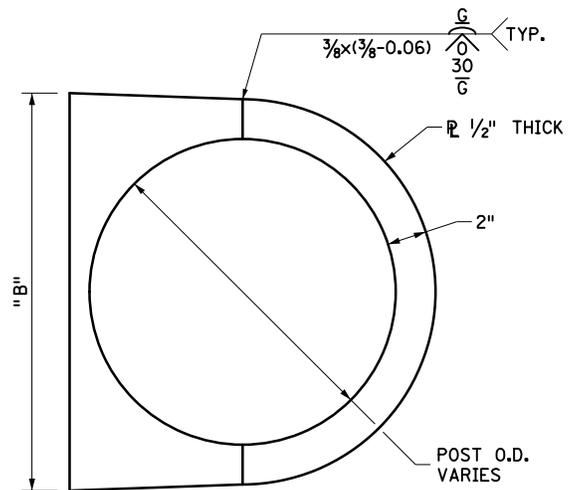

RING STIFFENER

NOTES:

- ① FIELD-APPLY 100% SILICONE CAULK (EXTERIOR USAGE) AT TOP OF BACKING RING ALONG ENTIRE INTERIOR CIRCUMFERENCE OF ARM.

| MAST ARM CONNECTION | | | | | | |
|--|-----------|-----------------|---------|---------|---------|---------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| TOP CHORD - TOP RING STIFFENER PLATE | R1 | 21 1/8" | 22 1/8" | 22 1/8" | 24" | 24 1/4" |
| TOP CHORD - BOTTOM RING STIFFENER PLATE | R2 | 21 3/8" | 22 3/8" | 22 3/8" | 24 3/8" | 24 3/4" |
| BOTTOM CHORD - TOP RING STIFFENER PLATE | R3 | 21 1/2" | 22 1/2" | 22 1/2" | 24 1/2" | 24 3/4" |
| BOTTOM CHORD - BOTTOM RING STIFFENER PLATE | R4 | 21 3/4" | 22 3/4" | 22 3/4" | 24 3/4" | 25 1/8" |
| BEARING/BASE PLATE WIDTH | A | 27" | 28" | 29" | 31" | 32" |
| RING STIFFENER WIDTH AT BEARING PLATE | B | 26" | 27" | 28" | 30" | 31" |
| TOP CHORD GUSSET PLATE WIDTH | C | 9" | 9 1/2" | 9 1/2" | 10 1/2" | 10 3/4" |
| TOP CHORD GUSSET PLATE HEIGHT | D | 24" | 26" | 26" | 28" | 34" |
| BOTTOM CHORD GUSSET PLATE WIDTH | E | 9 1/4" | 9 3/4" | 9 3/4" | 10 3/4" | 10 7/8" |
| BOTTOM CHORD GUSSET PLATE HEIGHT | F | 19" | 19" | 19" | 22" | 24" |

APPROVED 02-27-2024

Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION





POLE AND MAST ARM TYPE TS
STIFFENER PLATE/GUSSET PLATE CONNECTION DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.
8125A
6 OF 13

FLANGE SPLICE PLATE

| POLE TYPE | MAST ARM LENGTH | TOP CHORD | | | BOTTOM CHORD | | |
|-----------|-----------------|--|--|---|--|--|---|
| | | FLANGE SPLICE PLATE DIAMETER \varnothing_{TF} | BOLT CIRCLE DIAMETER \varnothing_{TS} | CHORD DIAMETER @ SPLICE \varnothing_{TC} | FLANGE SPLICE PLATE DIAMETER \varnothing_{BF} | BOLT CIRCLE DIAMETER \varnothing_{BS} | CHORD DIAMETER @ SPLICE \varnothing_{BC} |
| TS60 | 60' 0" | 24" | 21" | 16.9" | 19" | 16" | 11.5" |
| TS65 | 65' 0" | 24.5" | 21.5" | 17.2" | 19" | 16" | 11.5" |
| TS70 | 70' 0" | 24.5" | 21.5" | 17.2" | 20" | 17" | 12.2" |
| TS75 | 75' 0" | 26" | 23" | 18.5" | 20" | 17" | 12.2" |
| TS80 | 80' 0" | 26" | 23" | 18.8" | 20" | 17" | 12.2" |

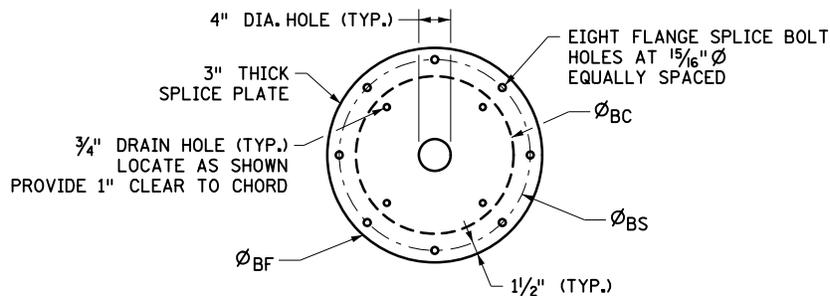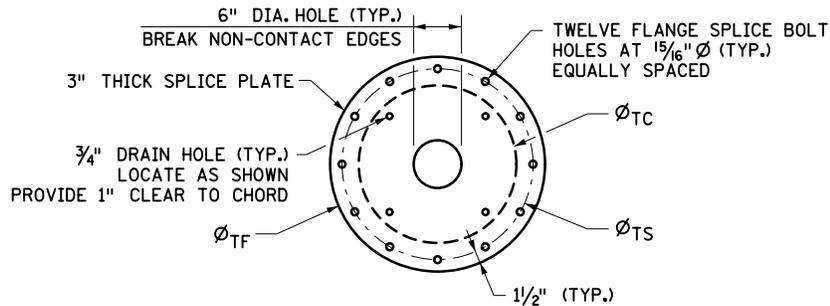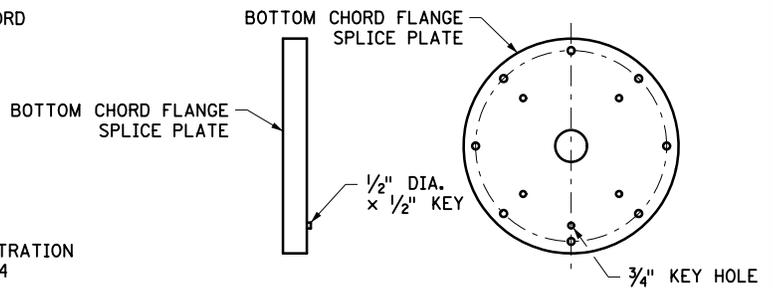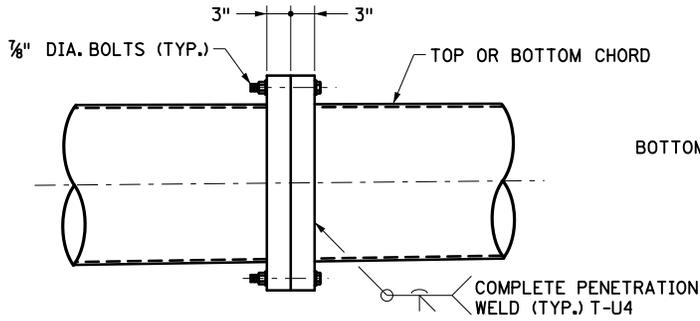

APPROVED 02-27-2024


Rom S. Smith
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
FLANGE SPLICE DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8125A
7 OF 13

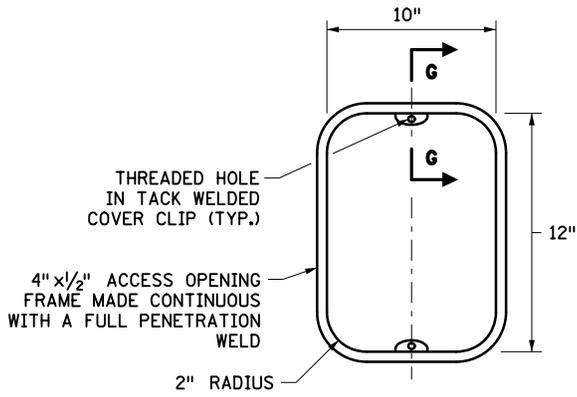


10" x 12" ACCESS OPENING FRAME

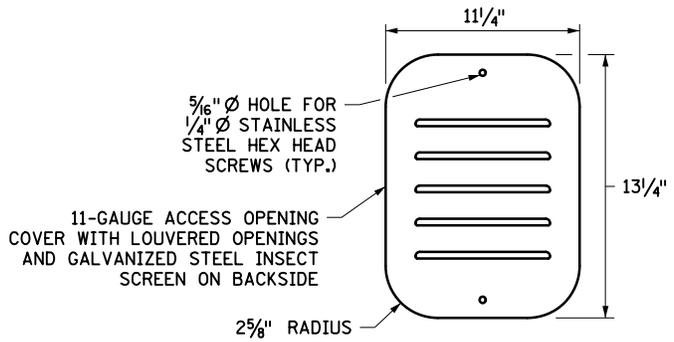


10" x 12" ACCESS OPENING COVER

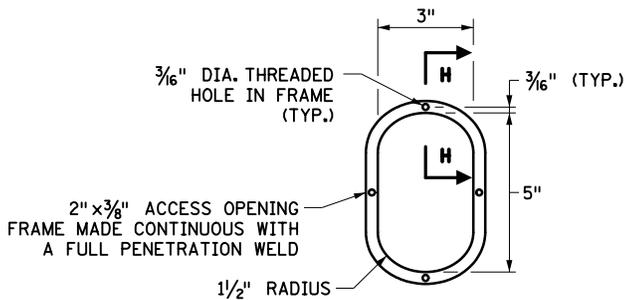


3" x 5" ACCESS OPENING FRAME

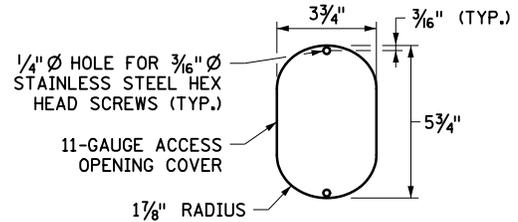


3" x 5" ACCESS OPENING COVER

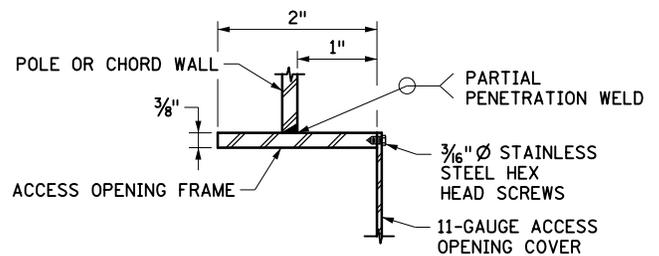

SECTION H-H

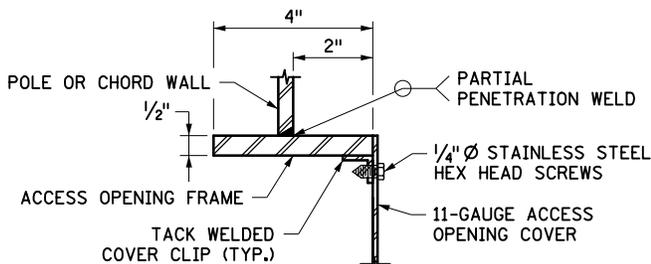

SECTION G-G

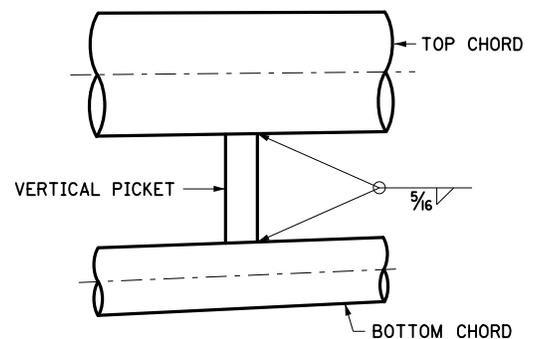

VERTICAL PICKET

| VERTICAL PICKET | | |
|-----------------|-----------------|---------------|
| POLE TYPE | MAST ARM LENGTH | BAR DIMENSION |
| TS60 | 60' 0" | 4" x 5/8" |
| TS65 | 65' 0" | 4 1/2" x 5/8" |
| TS70 | 70' 0" | 4 1/2" x 5/8" |
| TS75 | 75' 0" | 5" x 5/8" ① |
| TS80 | 80' 0" | 5" x 5/8" ① |

NOTES:

INSTALL FASTENERS TO A SNUG-TIGHT CONDITION.

① 6" x 5/8" BARS REQUIRED AT THE TWO PICKET LOCATIONS NEAREST TO THE POLE.

APPROVED 02-27-2024


Rom Sln
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION



POLE AND MAST ARM TYPE TS
ACCESS OPENING AND ATTACHMENT DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565

STANDARD
PLATE
NO.
8125A
8 OF 13

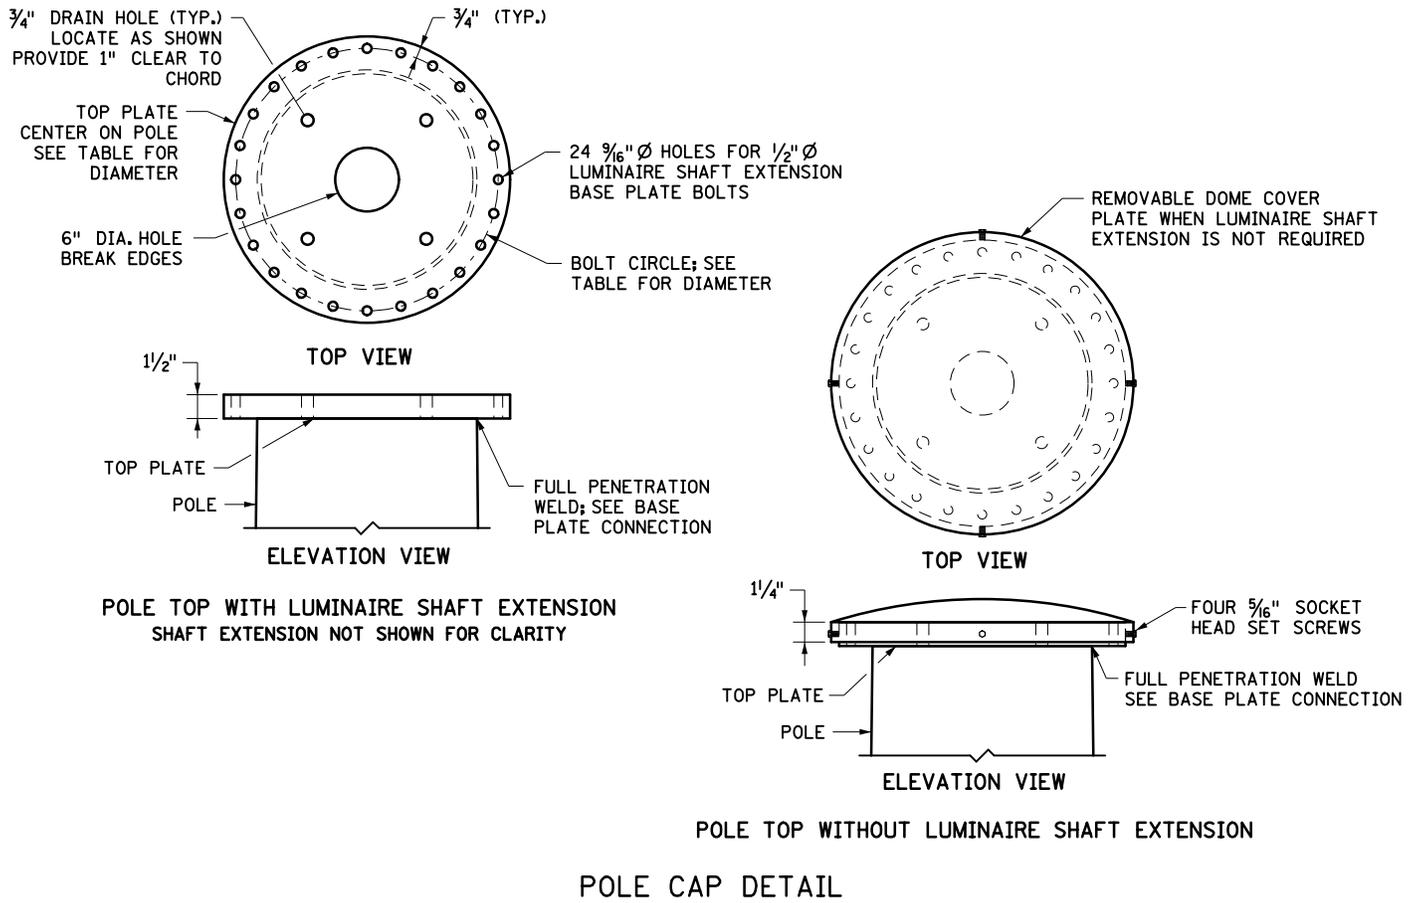

| POLE CAP DIMENSIONS | | | |
|---------------------|--------------------|----------------------|----------------------|
| POLE TYPE | TOP PLATE DIAMETER | BOLT CIRCLE DIAMETER | COVER PLATE DIAMETER |
| TS60 | 22 1/2" | 21" | 22 1/2" |
| TS65 | 24" | 22 1/2" | 24" |
| TS70 | 24" | 22 1/2" | 24" |
| TS75 | 26" | 24 1/2" | 26" |
| TS80 | 26 1/2" | 25" | 26 1/2" |

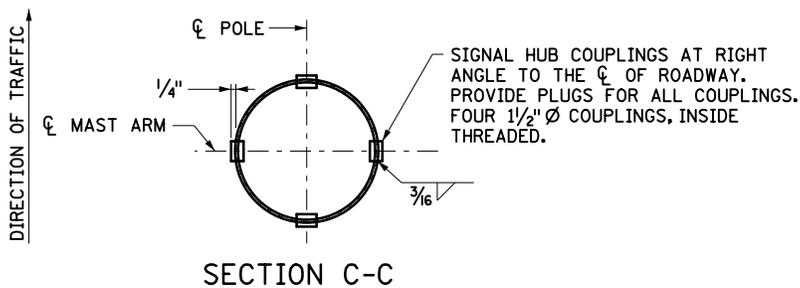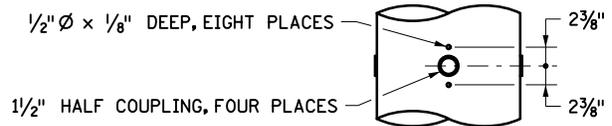

APPROVED 02-27-2024

Rom S...


STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


POLE AND MAST ARM TYPE TS
MISCELLANEOUS DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION REFERENCE
2565


STANDARD PLATE NO.
8125A
9 OF 13

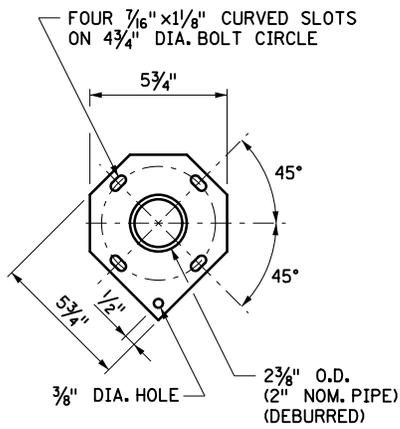


FRONT VIEW

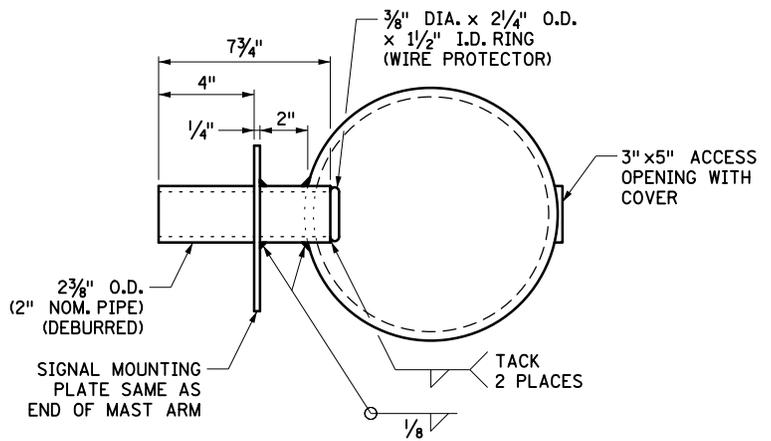

SIGNAL MOUNTING DETAIL
MID MAST ARM

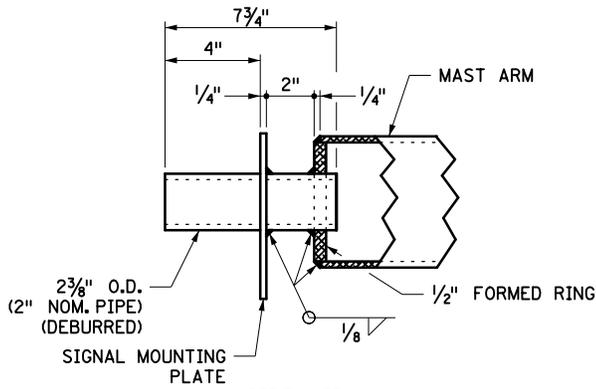

SIGNAL MOUNTING DETAIL
END OF MAST ARM

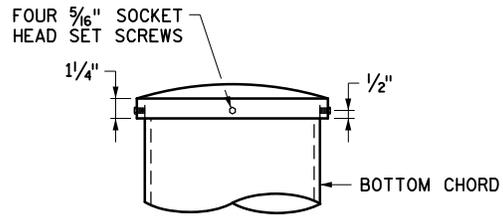

REMOVABLE CHORD CAP DETAIL


APPROVED 02-27-2024

 STATE DESIGN ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
 MISCELLANEOUS DETAILS
 FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
 REFERENCE
 2565


STANDARD
 PLATE
 NO.
8125A
 10 OF 13

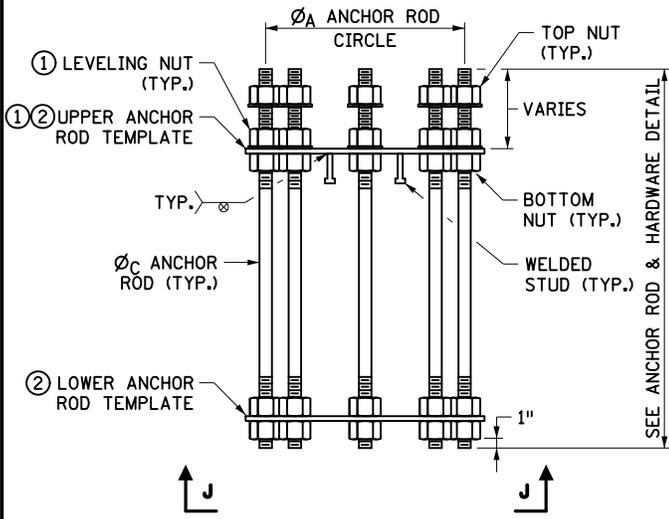


ANCHOR ROD ASSEMBLY DETAIL

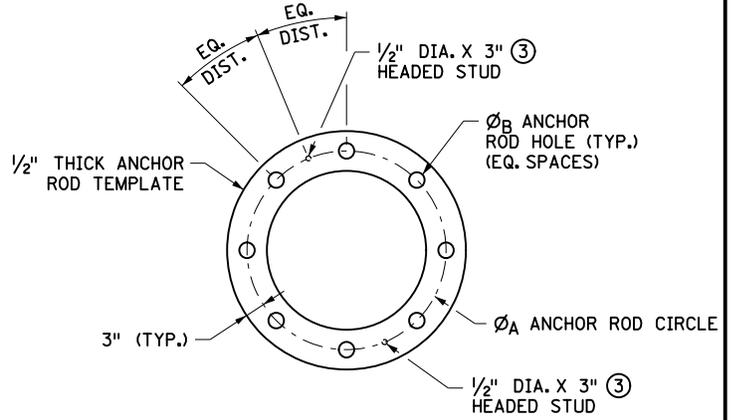

ANCHOR ROD TEMPLATE
TWO PER ASSEMBLY, ONE UPPER AND ONE LOWER

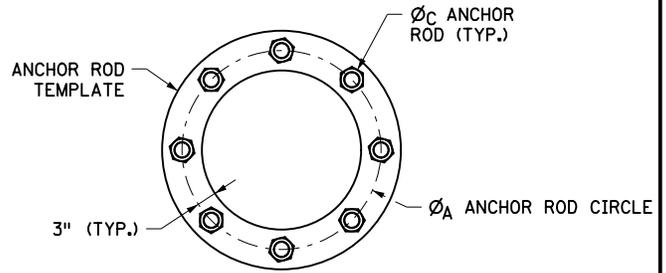

VIEW J-J

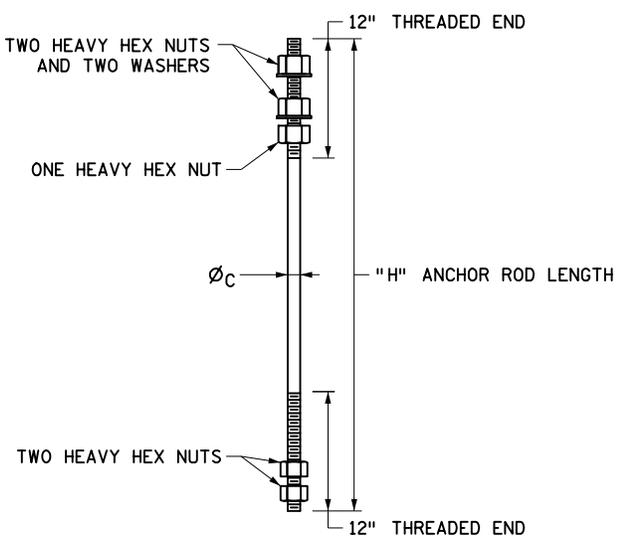

ANCHOR ROD AND HARDWARE
EIGHT REQUIRED PER ASSEMBLY

| POLE TYPE | ANCHOR ROD CIRCLE | ANCHOR ROD HOLE | ANCHOR ROD DIA. | ANCHOR ROD TOTAL LENGTH |
|-----------|-------------------|-----------------|-----------------|-------------------------|
| | Ø _A | Ø _B | Ø _C | H |
| TS60 | 29" | 1 5/8" | 1 1/2" | 42" |
| TS65 | 29" | 1 7/8" | 1 3/4" | 47" |
| TS70 | 31" | 2 1/8" | 2" | 52" |
| TS75 | 33" | 2 1/8" | 2" | 52" |
| TS80 | 33" | 2 3/8" | 2 1/4" | 59" |

NOTES:

- ① USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE CONCRETE OPERATIONS. LEAVE THE NUTS SECURE AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS IN ACCORDANCE WITH SPEC 2545.3.
- ② TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12"-LONG WRENCH.
- ③ FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2 "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.

GALVANIZE HEAVY HEX NUTS AND WASHERS IN ACCORDANCE WITH SPEC. 3392.

GALVANIZE UPPER AND LOWER ANCHOR ANCHOR ROD TEMPLATES IN ACCORDANCE WITH SPEC. 3394.


FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

APPROVED 02-27-2024
Rom S
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
ANCHOR ROD ASSEMBLY DETAILS
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION REFERENCE
2565


STANDARD PLATE NO.
8125A
11 OF 13

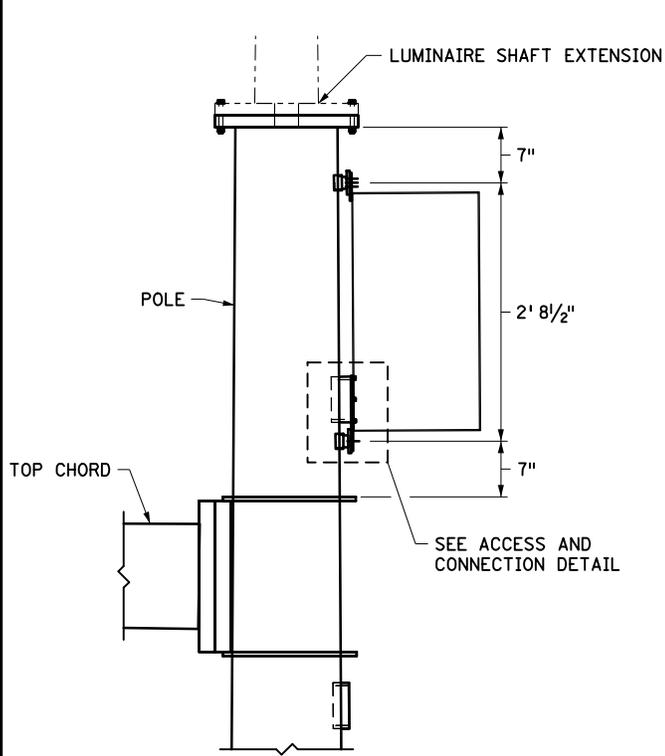


CCTV CABINET DETAIL

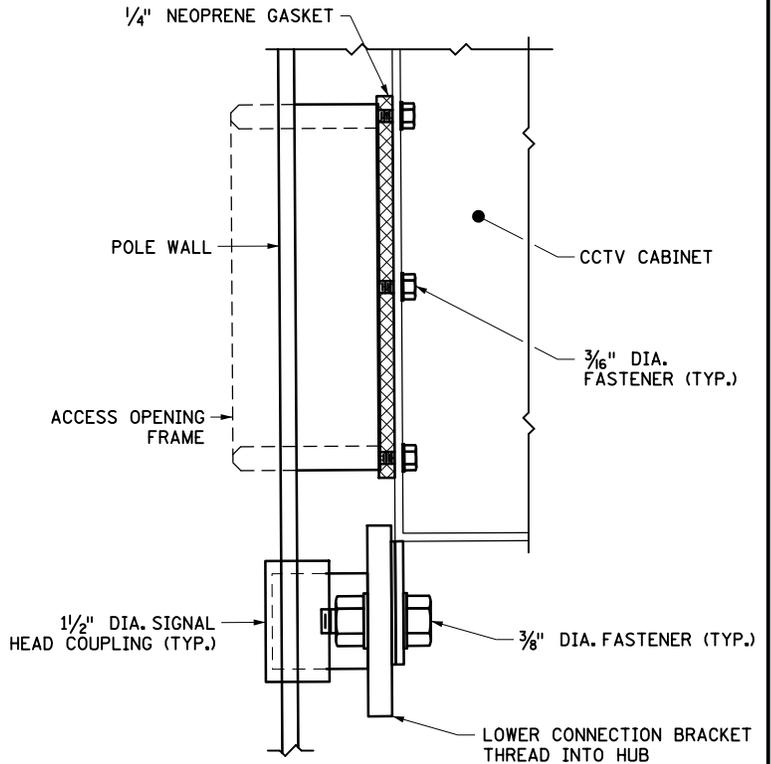

ACCESS AND CONNECTION DETAIL
LOWER CONNECTION SHOWN; UPPER SIMILAR

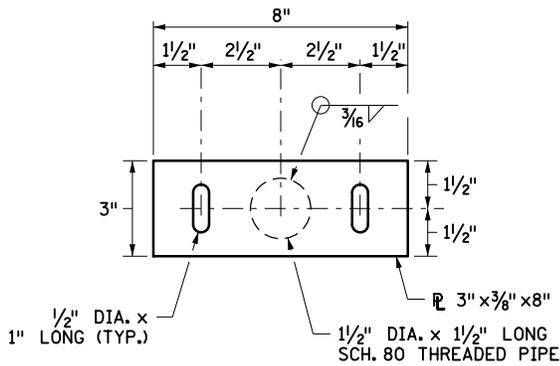

UPPER CONNECTION BRACKET
ONE REQUIRED PER POLE

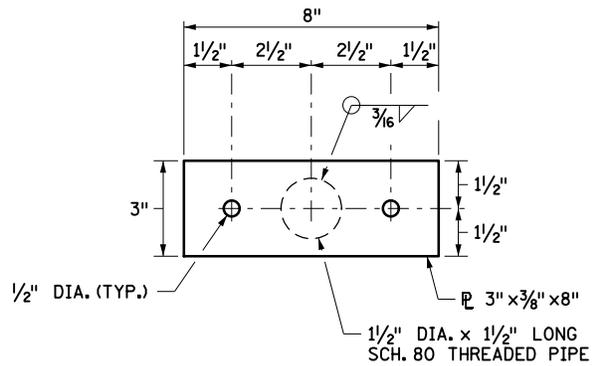

LOWER CONNECTION BRACKET
ONE REQUIRED PER POLE

NOTES:

PROVIDE DETAILS ON THIS SHEET IF POLE IS TO RECEIVE A CCTV CABINET.


FURNISH AND INSTALL COMMON STRUCTURAL STEEL BOLTS, NUTS, AND WASHERS IN ACCORDANCE WITH SPEC. 3391 FOR THE CCTV CABINET TO POLE BRACKETING CONNECTIONS.

APPROVED 02-27-2024
Rom S...
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
CCTV CONNECTION DETAILS (1 OF 2)
FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
REFERENCE
2565


STANDARD
PLATE
NO.
8125A
12 OF 13

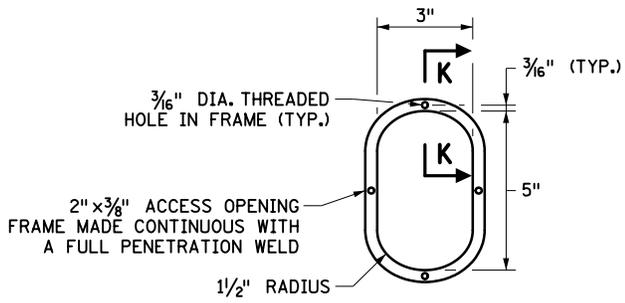

3" x 5" ACCESS OPENING FRAME

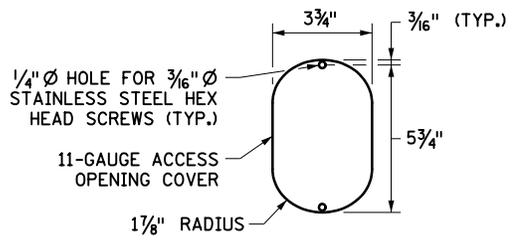

3" x 5" ACCESS OPENING COVER PLATE
 PROVIDE COVER PLATE WHEN CCTV
 CABINET IS NOT REQUIRED

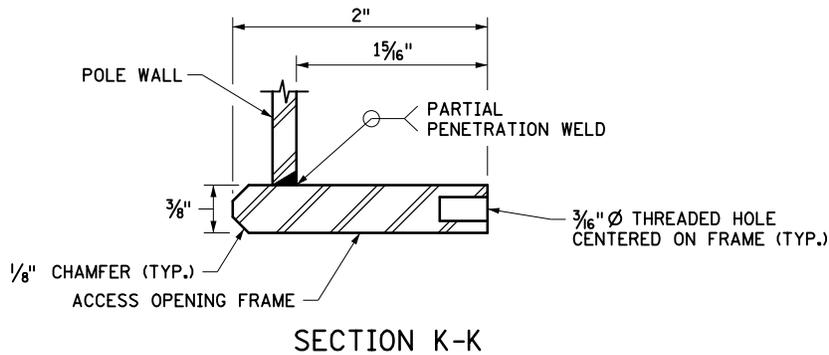

SECTION K-K





APPROVED 02-27-2024

 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
POLE AND MAST ARM TYPE TS
 CCTV CONNECTION DETAILS (2 OF 2)
 FOR MAST ARM LENGTHS 60' TO 80'

SPECIFICATION
 REFERENCE
 2565

STANDARD
 PLATE
 NO.
8125A
 13 OF 13

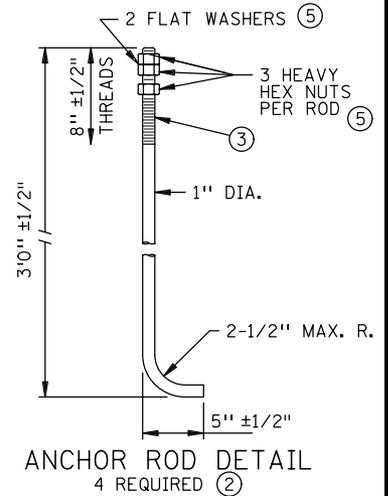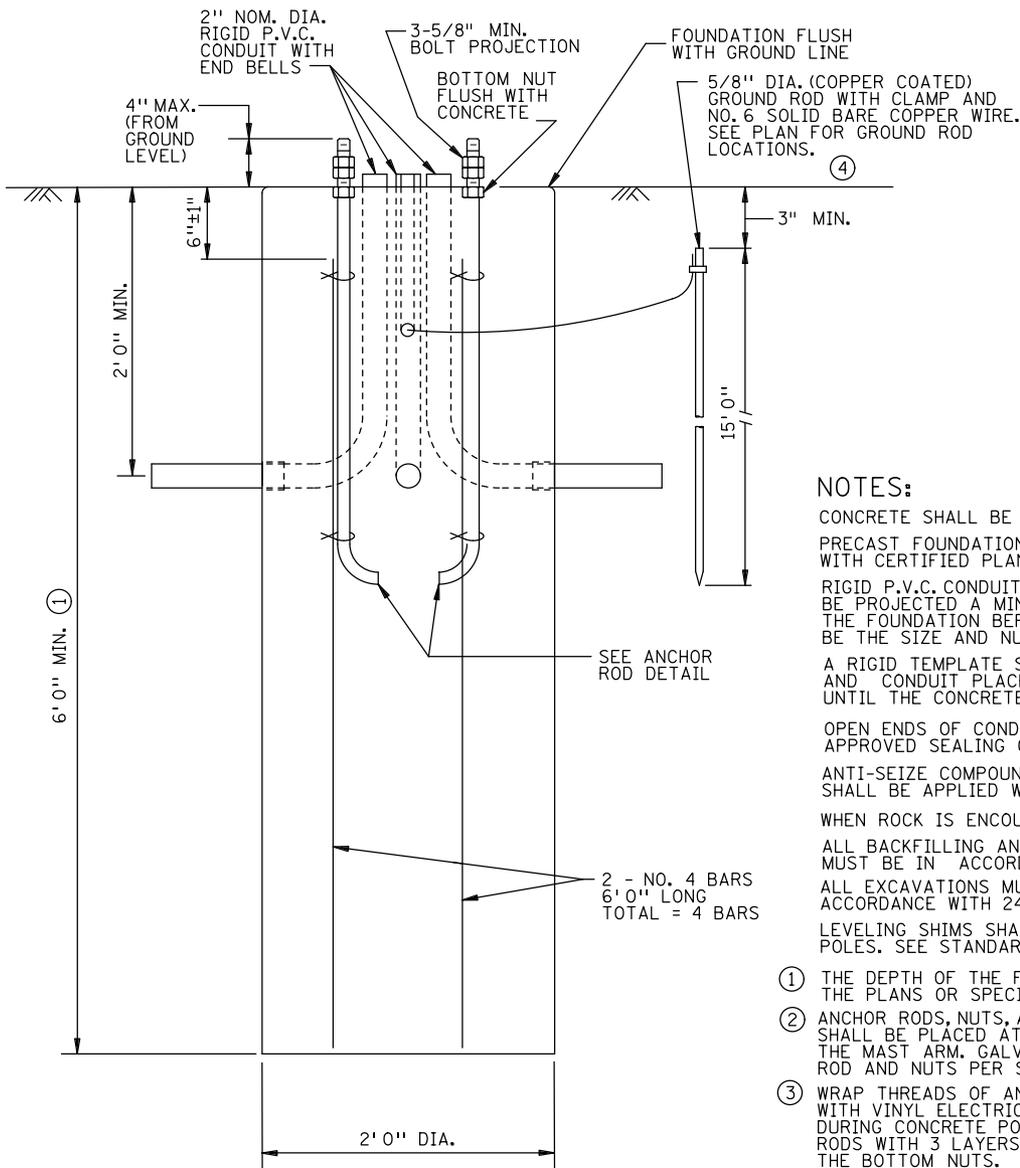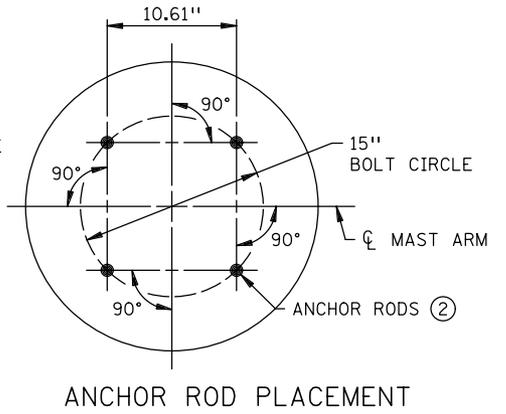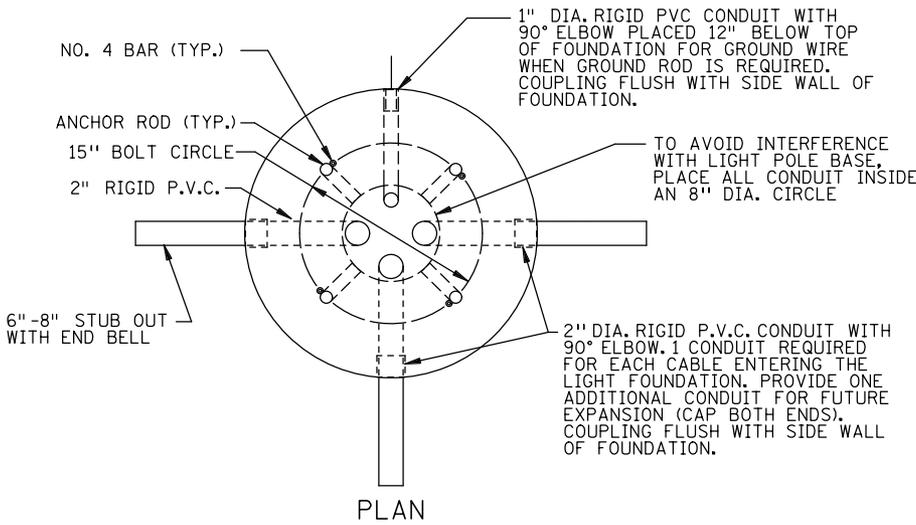

NOTES:

- CONCRETE SHALL BE MIX NO. 3G52.
- PRECAST FOUNDATION FACILITY MUST BE IN COMPLIANCE WITH CERTIFIED PLANT REQUIREMENT OF SPEC. 3238.
- RIGID P.V.C. CONDUIT PER SPEC. 3803 WITH END BELLS SHALL BE PROJECTED A MINIMUM 1/4" TO MAXIMUM 1" ABOVE THE FOUNDATION BEFORE MORTAR IS PLACED AND SHALL BE THE SIZE AND NUMBER SHOWN IN THE PLAN.
- A RIGID TEMPLATE SHALL BE PROVIDED FOR ANCHOR ROD AND CONDUIT PLACEMENT AND SHALL BE LEFT IN PLACE UNTIL THE CONCRETE HAS SET.
- OPEN ENDS OF CONDUITS SHALL BE SEALED WITH AN APPROVED SEALING COMPOUND.
- ANTI-SEIZE COMPOUND THAT MEETS MIL-PRF-907E SPEC. SHALL BE APPLIED WITH A BRUSH TO ALL THREADS.
- WHEN ROCK IS ENCOUNTERED, SEE PLAN DETAILS.
- ALL BACKFILLING AND EXCAVATION AROUND FOUNDATION MUST BE IN ACCORDANCE WITH 2451 AND 2545.3.
- ALL EXCAVATIONS MUST BE PROPERLY COMPACTED IN ACCORDANCE WITH 2451.
- LEVELING SHIMS SHALL BE USED WHEN PLACING ALUMINUM POLES. SEE STANDARD PLATE 8129.
- ① THE DEPTH OF THE FOUNDATION MAY VARY IN THE PLANS OR SPECIAL PROVISIONS.
- ② ANCHOR RODS, NUTS, AND WASHERS PER SPEC. 3385, TYPE B, SHALL BE PLACED AT RIGHT ANGLES TO THE DIRECTION OF THE MAST ARM. GALVANIZE THE TOP 1 FT. OF THE ANCHOR ROD AND NUTS PER SPEC. 3392.
- ③ WRAP THREADS OF ANCHOR RODS ABOVE THE BOTTOM NUT WITH VINYL ELECTRICAL TAPE TO AVOID CONTAMINATION DURING CONCRETE POURING. WRAP THREADS OF ANCHOR RODS WITH 3 LAYERS OF VINYL ELECTRICAL TAPE 2" BELOW THE BOTTOM NUTS.
- ④ GROUND ROD MUST BE ADDED 3" TO 6" DEEP BELOW GROUND LINE AND WITHIN 1' OF FOUNDATION.
- ⑤ USE 1 HOLDDOWN WASHER AND 2 HEAVY HEX NUTS PER ROD FOR ALUMINUM POLE INSTALLATION.

ELEVATION
PRECAST FOUNDATION





APPROVED JULY 15, 2015

Christy M. Ry
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
LIGHT FOUNDATION - DESIGN E
PRECAST
40 FT. POLE OR LESS

SPECIFICATION
REFERENCE
2545

STANDARD
PLATE
NO.
8127E
1 OF 2

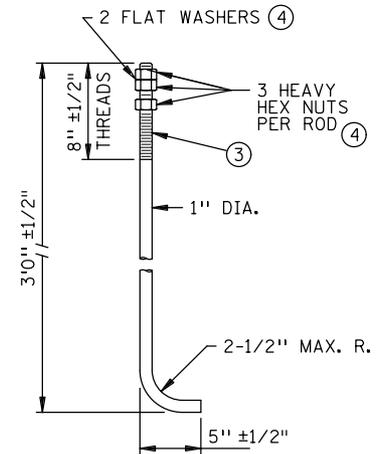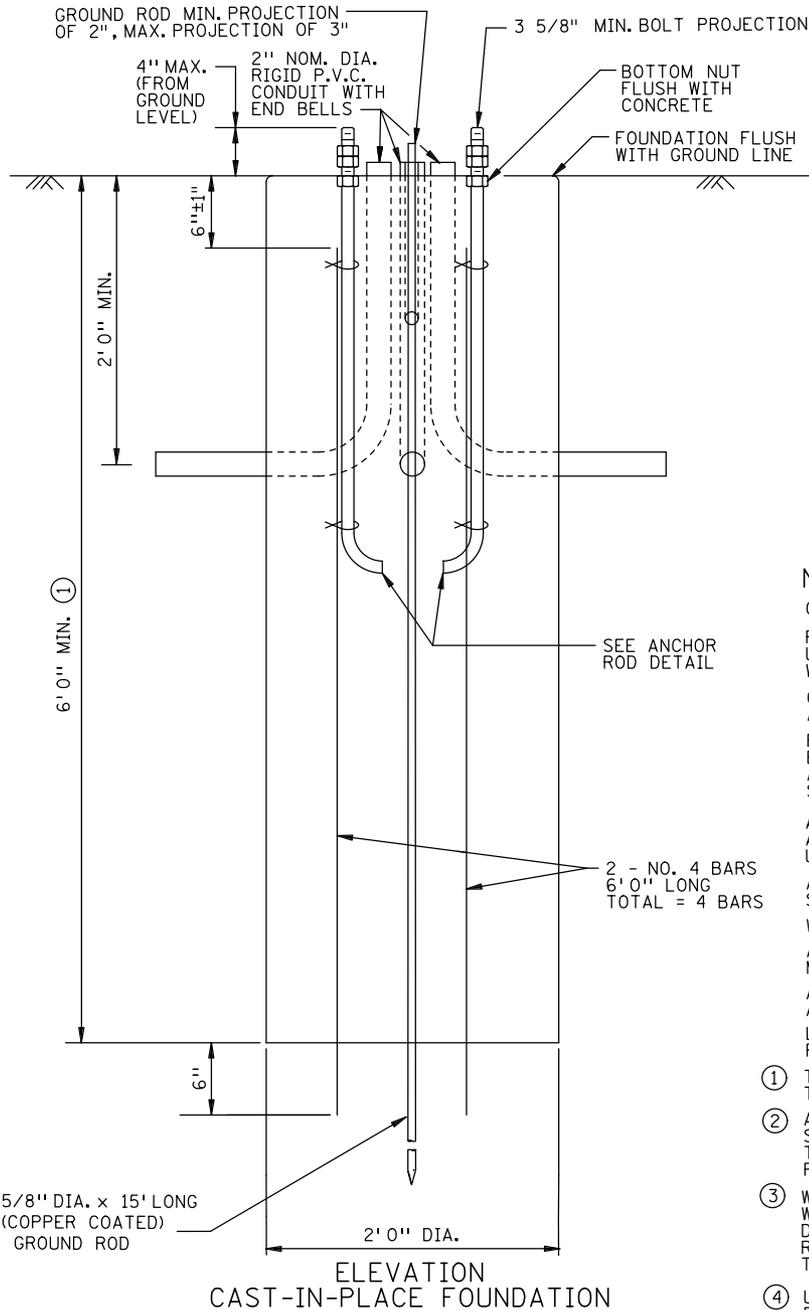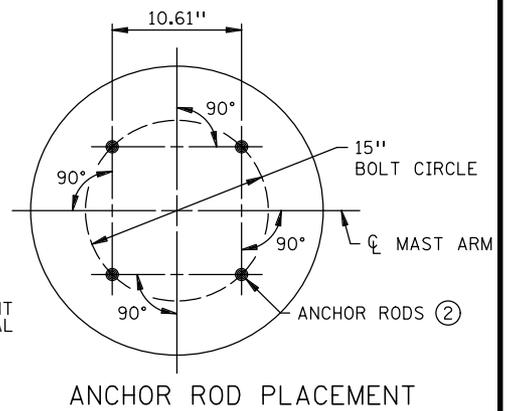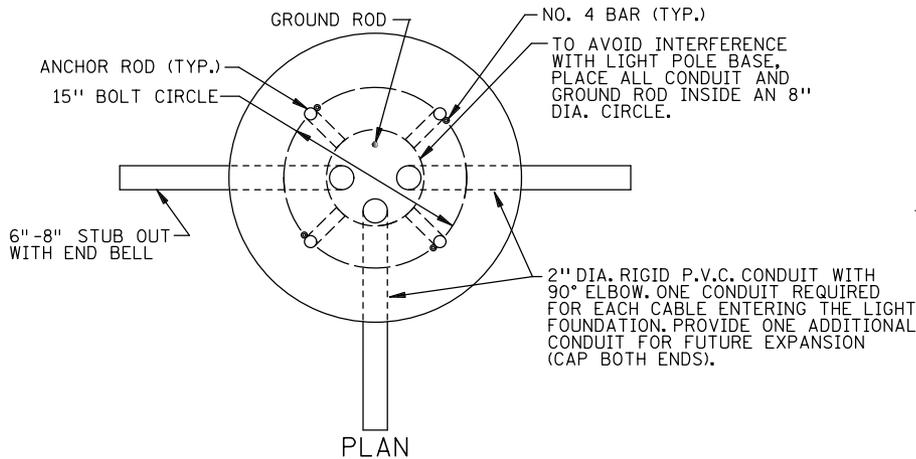

ANCHOR ROD DETAIL
4 REQUIRED (2)

NOTES:

- CONCRETE SHALL BE MIX NO. 3G52.
- FOUNDATIONS MAY BE CONSTRUCTED IN AUGERED HOLES UNLESS THE NATURAL SOILS WILL NOT STAND OPEN, IN WHICH CASE FORMING WILL BE REQUIRED.
- OPEN ENDS OF CONDUITS SHALL BE SEALED WITH AN APPROVED SEALING COMPOUND.
- RIGID P.V.C. CONDUIT PER SPEC. 3803 WITH END BELLS SHALL BE PROJECTED A MINIMUM 1/4" TO MAXIMUM 1" ABOVE THE FOUNDATION BEFORE MORTAR IS PLACED AND SHALL BE THE SIZE AND NUMBER SHOWN IN THE PLAN.
- A RIGID TEMPLATE SHALL BE PROVIDED FOR ANCHOR ROD AND CONDUIT PLACEMENT AND SHALL BE LEFT IN PLACE UNTIL THE CONCRETE HAS SET.
- ANTI-SEIZE COMPOUND THAT MEETS MIL-PRF-907E SPEC. SHALL BE APPLIED WITH A BRUSH TO ALL THREADS.
- WHEN ROCK IS ENCOUNTERED, SEE PLAN DETAILS.
- ALL BACKFILLING AND EXCAVATION AROUND FOUNDATION MUST BE IN ACCORDANCE WITH 2451 AND 2545.3.
- ALL EXCAVATIONS MUST BE PROPERLY COMPACTED IN ACCORDANCE WITH 2451.
- LEVELING SHIMS SHALL BE USED WHEN PLACING ALUMINUM POLES. SEE STANDARD PLATE 8129.
- (1) THE DEPTH OF THE FOUNDATION MAY VARY IN THE PLANS OR SPECIAL PROVISIONS.
- (2) ANCHOR RODS, NUTS, AND WASHERS PER SPEC. 3385, TYPE B, SHALL BE PLACED AT RIGHT ANGLES TO THE DIRECTION OF THE MAST ARM. GALVANIZE THE TOP 1 FT. OF THE ANCHOR ROD AND NUTS PER SPEC. 3392.
- (3) WRAP THREADS OF ANCHOR RODS ABOVE THE BOTTOM NUT WITH VINYL ELECTRICAL TAPE TO AVOID CONTAMINATION DURING CONCRETE POURING. WRAP THREADS OF ANCHOR RODS WITH 3 LAYERS OF VINYL ELECTRICAL TAPE 2" BELOW THE BOTTOM NUTS.
- (4) USE 1 HOLDDOWN WASHER AND 2 HEAVY HEX NUTS PER ROD FOR ALUMINUM POLE INSTALLATION.


APPROVED JULY 15, 2015

 STATE DESIGN ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
LIGHT FOUNDATION - DESIGN E
CAST IN-PLACE
 40 FT. POLE OR LESS

SPECIFICATION
 REFERENCE
 2545


STANDARD
 PLATE
 NO.
8127E
 2 OF 2

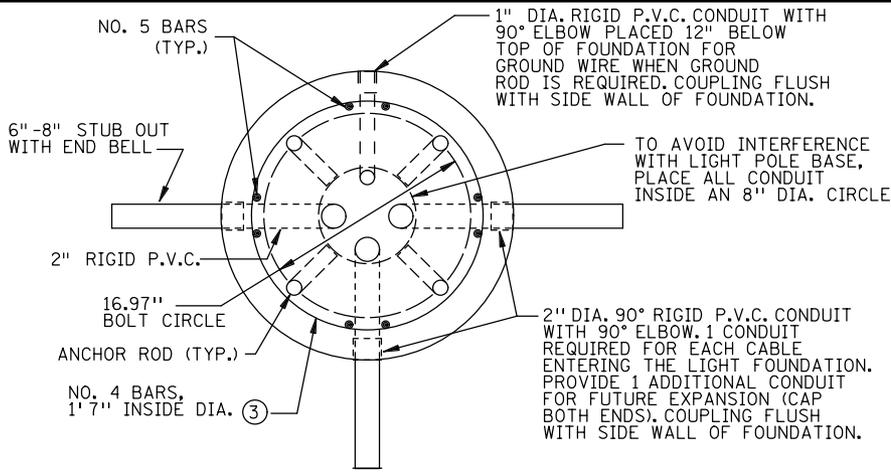


PLAN

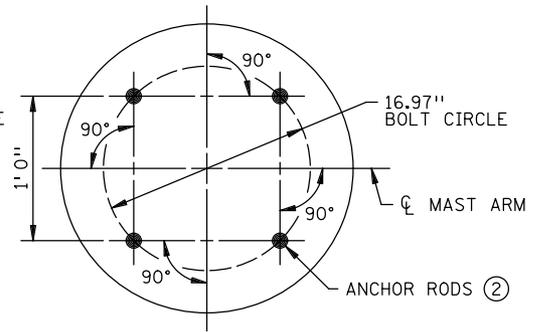

ANCHOR ROD PLACEMENT

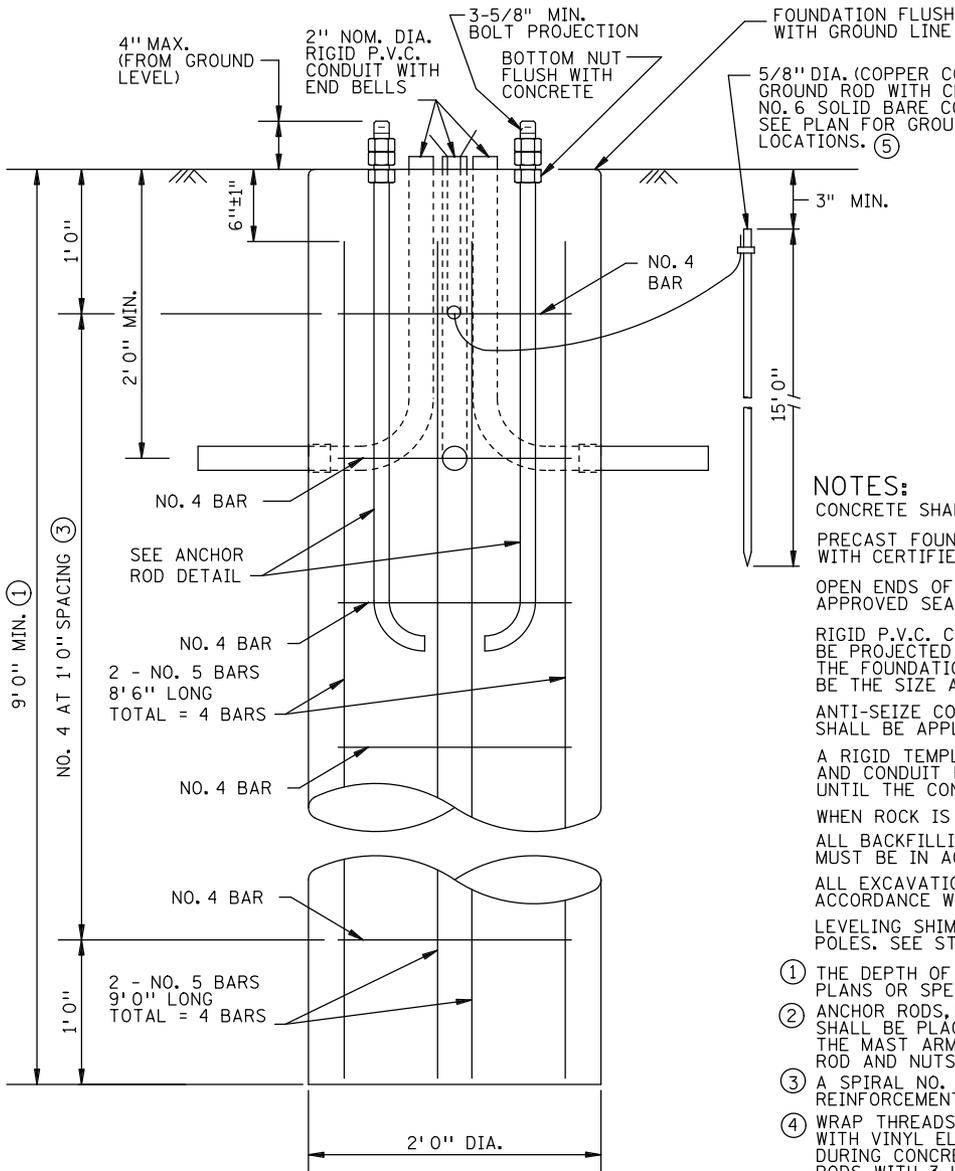

ELEVATION
PRECAST FOUNDATION

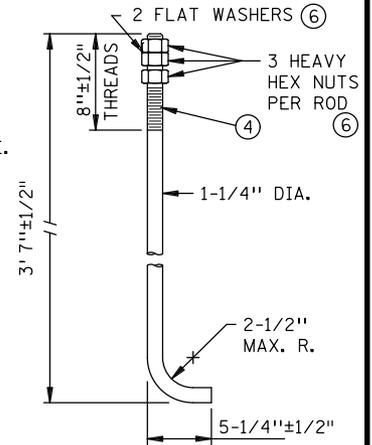

ANCHOR ROD DETAIL
4 REQUIRED (2)

NOTES:


- CONCRETE SHALL BE MIX NO. 3G52.
- PRECAST FOUNDATION FACILITY MUST BE IN COMPLIANCE WITH CERTIFIED PLANT REQUIREMENT OF SPEC. 3238.
- OPEN ENDS OF CONDUITS SHALL BE SEALED WITH AN APPROVED SEALING COMPOUND.
- RIGID P.V.C. CONDUIT PER SPEC. 3803 WITH END BELLS SHALL BE PROJECTED A MINIMUM OF 1/4" TO MAXIMUM 1" ABOVE THE FOUNDATION BEFORE MORTAR IS PLACED AND SHALL BE THE SIZE AND NUMBER SHOWN IN THE PLAN.
- ANTI-SEIZE COMPOUND THAT MEETS MIL-PRF-907E SPEC. SHALL BE APPLIED WITH A BRUSH TO ALL THREADS.
- A RIGID TEMPLATE SHALL BE PROVIDED FOR ANCHOR ROD AND CONDUIT PLACEMENT AND SHALL BE LEFT IN PLACE UNTIL THE CONCRETE HAS SET.
- WHEN ROCK IS ENCOUNTERED, SEE PLAN DETAILS.
- ALL BACKFILLING AND EXCAVATION AROUND THE FOUNDATION MUST BE IN ACCORDANCE WITH 2451 AND 2545.3.
- ALL EXCAVATIONS MUST BE PROPERLY COMPACTED IN ACCORDANCE WITH 2451.
- LEVELING SHIMS SHALL BE USED WHEN PLACING ALUMINUM POLES. SEE STANDARD PLATE 8129.
- ① THE DEPTH OF THE FOUNDATION MAY VARY IN THE PLANS OR SPECIAL PROVISIONS.
- ② ANCHOR RODS, NUTS, AND WASHERS PER SPEC. 3385, TYPE B, SHALL BE PLACED AT RIGHT ANGLES TO THE DIRECTION OF THE MAST ARM. GALVANIZE THE TOP 1 FT. OF THE ANCHOR ROD AND NUTS PER SPEC. 3392.
- ③ A SPIRAL NO. 4 BAR MAY BE USED AS AN ALTERNATE REINFORCEMENT.
- ④ WRAP THREADS OF ANCHOR RODS ABOVE THE BOTTOM NUT WITH VINYL ELECTRICAL TAPE TO AVOID CONTAMINATION DURING CONCRETE POURING. WRAP THREADS OF ANCHOR RODS WITH 3 LAYERS OF VINYL ELECTRICAL TAPE 2" BELOW THE BOTTOM NUTS.
- ⑤ GROUND ROD MUST BE ADDED 3" TO 6" DEEP BELOW GROUND LINE AND WITHIN 1' OF FOUNDATION.
- ⑥ USE 1 HOLDDOWN WASHER AND 2 HEAVY HEX NUTS PER ROD FOR ALUMINUM POLE INSTALLATION.

APPROVED JULY 15, 2015
Christina Ky
STATE DESIGN ENGINEER


STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
LIGHT FOUNDATION - DESIGN H
PRECAST
49 FT. POLE

SPECIFICATION
REFERENCE
2545

STANDARD
PLATE
NO.
8128E
1 OF 2

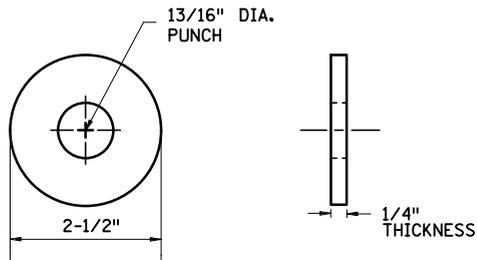


OPTION A

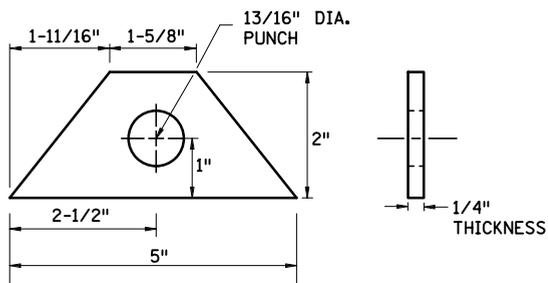

OPTION B

TRAFFIC SIGNAL PEDESTAL WASHERS ①

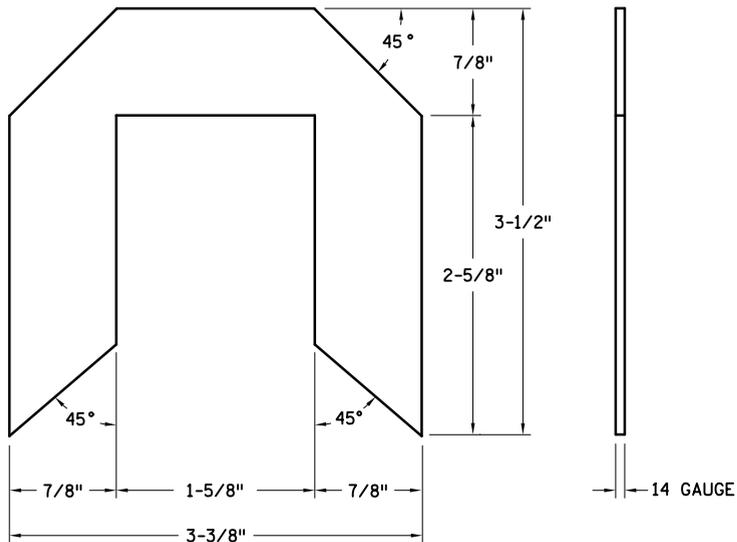

SIGNAL AND LIGHTING LEVELING SHIM ②

NOTES:

- ① WASHERS PER SPEC. 3832.2C3, EXCEPT THE DIMENSIONS MUST BE AS SHOWN.
- ② MATERIAL - GALVANIZED STEEL SHEET 36,000 PSI MIN. YIELD PER ASTM A924.
FINISH - PREPLATED GALVANIZED MATERIAL

APPROVED DECEMBER 20, 2011

M. J. [Signature]
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION


SHIM AND WASHER
(TRAFFIC CONTROL SIGNALS
AND ROADWAY LIGHTING)

SPECIFICATION
REFERENCE


2545
2565

STANDARD
PLATE
NO.


8129A



T-100
8 BOLT, 34" BOLT CIRCLE




T-120
10 BOLT, 36" BOLT CIRCLE




T-140
12 BOLT, 38" BOLT CIRCLE


UPPER ANCHOR ROD TEMPLATE



T-100
8 BOLT, 34" BOLT CIRCLE




T-120
10 BOLT, 36" BOLT CIRCLE




T-140
12 BOLT, 38" BOLT CIRCLE

LOWER ANCHOR ROD TEMPLATE

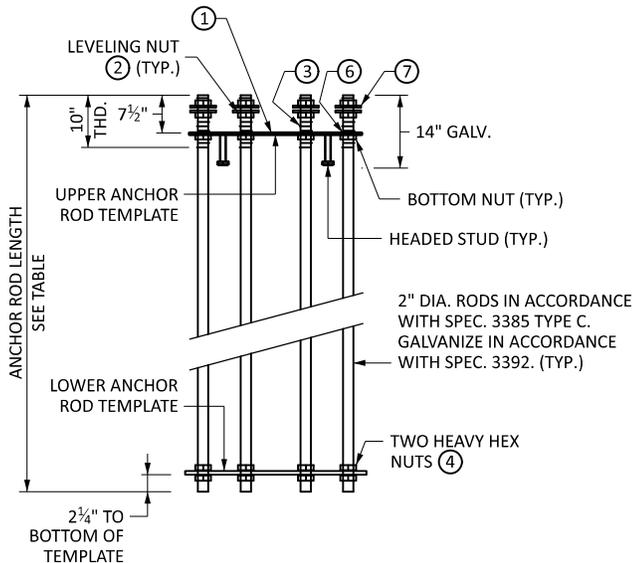

ANCHOR ROD ASSEMBLY
ELEVATION VIEW

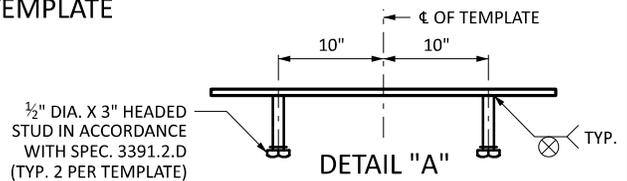

DETAIL "A"
ELEVATION VIEW
UPPER ANCHOR ROD TEMPLATE
T-100 SHOWN, OTHERS SIMILAR

NOTES:

FURNISH AND INSTALL 1/2" THICK ANCHOR ROD METAL TEMPLATES IN ACCORDANCE WITH SPEC. 3306 WITH 2 1/16" DIA. HOLES MATCHING THE ANCHOR ROD PATTERN OF THE TOWER BASE PLATE. GALVANIZE TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

ANCHOR RODS DESIGNED FOR IMPORTANCE CATEGORY I FATIGUE DESIGN.

FOR EACH ANCHOR ROD, FURNISH AND INSTALL FIVE HEX NUTS IN ACCORDANCE WITH ASTM A194 GRADE 2H OR GRADE 7 WITH TWO HARDENED FLAT WASHERS IN ACCORDANCE WITH ASTM F436, ALL GALVANIZED IN ACCORDANCE WITH SPEC. 3392. USE AS FOLLOWS (PER ANCHOR ROD):

- TWO HEAVY HEX NUTS AND HARDENED FLAT WASHERS FOR THE DOUBLE NUT CONNECTION AT THE TOP OF THE ANCHOR ROD.
- ONE HEAVY HEX NUT ON THE UNDERSIDE OF THE UPPER ANCHOR ROD TEMPLATE (BOTTOM NUT).
- TWO HEAVY HEX NUTS TO SECURE THE LOWER ANCHOR ROD TEMPLATE.

- ① POSITION THE UPPER ANCHOR ROD TEMPLATE 7 1/2" FROM THE TOP OF THE ANCHOR RODS AND EMBED THE TOP OF THE TEMPLATE FLUSH WITH THE TOP OF THE PEDESTAL CONCRETE.
- ② TEMPORARILY SECURE THE TOP OF THE UPPER TEMPLATE WITH THE LEVELING NUT BEFORE CONCRETE PLACEMENT. DO NOT LOOSEN LEVELING NUTS UNTIL AT LEAST 24 HOURS AFTER CONCRETE PLACEMENT.
- ③ WRAP THREADED PORTION OF ANCHOR RODS PROJECTING ABOVE THE CONCRETE PEDESTAL WITH THREE LAYERS OF VINYL ELECTRICAL TAPE BEFORE PLACING CONCRETE TO AVOID THREAD CONTAMINATION (TYP.).
- ④ TIGHTEN NUTS TO A "SNUG TIGHT" CONDITION IN ACCORDANCE WITH SPEC. 2402.3.F.
- ⑤ HEADED STUD, SEE DETAIL "A".
- ⑥ REMOVE SURFACE CONTAMINANTS AND SUPPLY SILICONE JOINT SEALER TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS THE CONCRETE. USE AN APPROVED SILICONE JOINT SEALER FOUND ON MnDOT'S APPROVED/QUALIFIED PRODUCTS LIST UNDER BRIDGE PRODUCTS.
- ⑦ FURNISH AND INSTALL TWO HARDENED FLAT WASHERS FOR EACH ANCHOR ROD.

| ANCHOR ROD FOR MAT OR PILE FOUNDATIONS SEE PLANS FOR TYPE | ANCHOR ROD LENGTH |
|---|-------------------------|
| MAT FOUNDATION FOR T-100 | 6' 4" |
| MAT FOUNDATION FOR T-120 | 6' 4" |
| MAT FOUNDATION FOR T-140 | 6' 10" |
| | |
| PILE FOUNDATION FOR T-100 | 6' 4" |
| PILE FOUNDATION FOR T-120 | 7' 4" |
| PILE FOUNDATION FOR T-140 | 7' 4" |



APPROVED: 11-15-2024

Tom Styrbicki
THOMAS STYRBICKI
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
ANCHOR ROD ASSEMBLY FOR
LIGHT TOWER FOUNDATION

SPECIFICATION
REFERENCE
2402 3306 3385
3392 3394

STANDARD
PLATE NO.
8135B

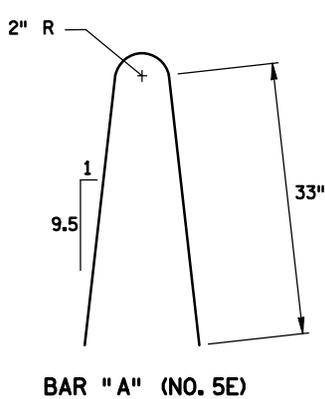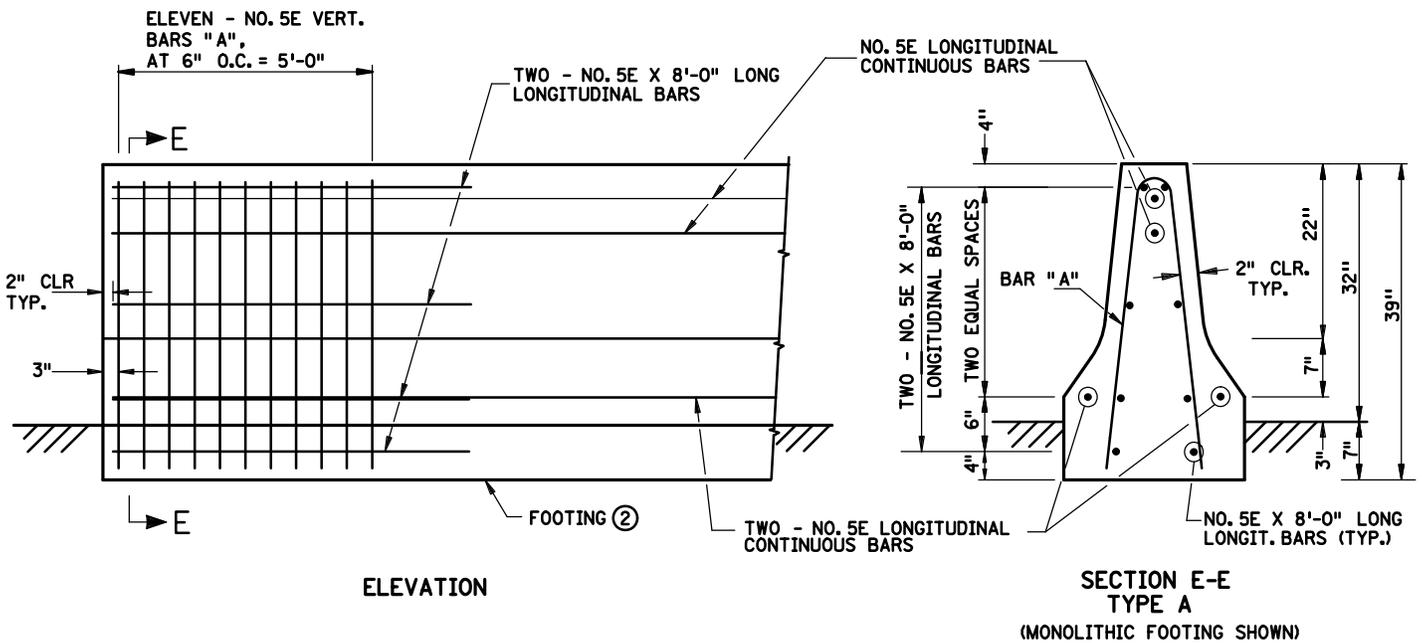

END ANCHORAGE DETAIL ①

NOTES:

- ① END ANCHORAGE MUST BE PLACED AT BOTH ENDS OF THE BARRIER AND AT ANY EXPANSION JOINT/OPEN JOINT. EXPANSION JOINTS SHALL BE PROVIDED IN THE BARRIERS TO MATCH EXPANSION JOINTS IN RIGID PAVEMENT, AT BRIDGE APPROACHES, OR AT OTHER STRUCTURES, WHERE UNCONTROLLED LONGITUDINAL MOVEMENT MAY BE OBJECTIONABLE.
- ② IF FOOTING IS CONSTRUCTED SEPARATELY, A FOOTING JOINT WITH NO. 8E DOWEL BARS 8" LONG AT 2'-0" CENTERS IS REQUIRED. DUMMY TRANSVERSE JOINTS (1-1/2" MIN. DEPTH) SHALL BE PLACED IN FOOTING AND BE ALIGNED WITH CONTRACTION JOINTS IN UPPER PORTION OF BARRIER. THE SURFACE OF THE FOOTING JOINT SHALL BE ROUGH.
- ③ ALL REBARS SHALL BE GRADE 60 STEEL AND SHALL BE EPOXY COATED, PER SPEC. 3301.
- ④ MINIMUM LAP SPLICE IS 2' - 11" FOR ALL BARS.

GENERAL CONSTRUCTION NOTES:

- A. CONSTRUCTION METHOD SHALL BE CONTRACTOR'S OPTION: CAST-IN-PLACE (FIXED FORM OR SLIP FORM) OR PRECAST.
- B. PRECAST SECTIONS SHALL WEIGH A MINIMUM OF 650 LBS./FT. (TYPE A WITH STANDARD FOOTING). PROVISIONS SHALL BE MADE FOR THE INTERCONNECTION OF INDIVIDUAL SECTIONS PROVIDING LATERAL RESISTANCE EQUIVALENT TO THAT OF THE BARRIER SECTION ITSELF.
- C. CONTRACTOR SHALL PROVIDE ALL NECESSARY SUPPORTS TO MAINTAIN LONGITUDINAL REBARS AT DIMENSIONS SHOWN ON THE PLAN DURING SLIP FORMING.
- D. CONTRACTOR SHALL PROVIDE VERTICAL SUPPORTS WITH 2' - 0" MAXIMUM SPACING TO MAINTAIN LONGITUDINAL REBARS AT DIMENSIONS SHOWN ON THE PLAN DURING FIXED FORMING.
- E. PAY QUANTITIES WILL NOT BE ADJUSTED AS A RESULT OF SELECTING ONE OF THE CONSTRUCTION METHODS.

| BILL OF REINFORCEMENT ③ | | | | |
|-------------------------|----------------|------------|-----------|-----------------|
| BAR SIZE | LENGTH PER BAR | NO. OF BAR | BAR SHAPE | BAR LOCATION |
| 5E | --- | --- | STR | LONGITUDINAL ④ |
| 5E | 8'-0" | 16* | STR | LONGIT. AT ENDS |
| 5E | 6'-0" | 22* | BENT | VERT. AT ENDS |

* NUMBERS PER TWO ENDS



APPROVED APRIL 14, 2020

 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
**REINFORCED CONCRETE MEDIAN
 BARRIER TYPE F**
 (NON-GLARE SCREEN TYPE) DESIGN 8308
 GENERAL CONSTRUCTION NOTES & END ANCHORAGE


SPECIFICATION
 REFERENCE
 2533

STANDARD
 PLATE
 NO.
8308C
 2 OF 4

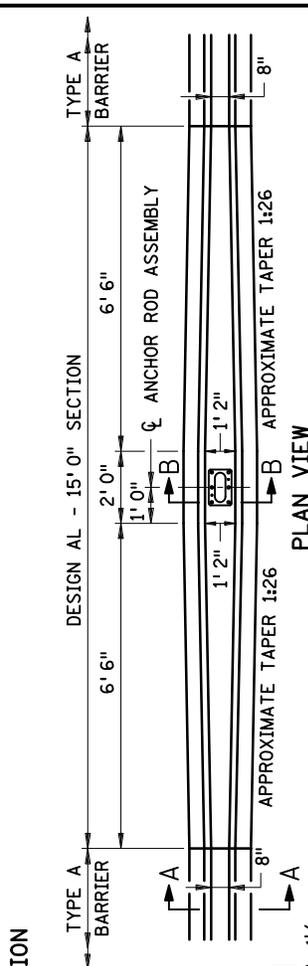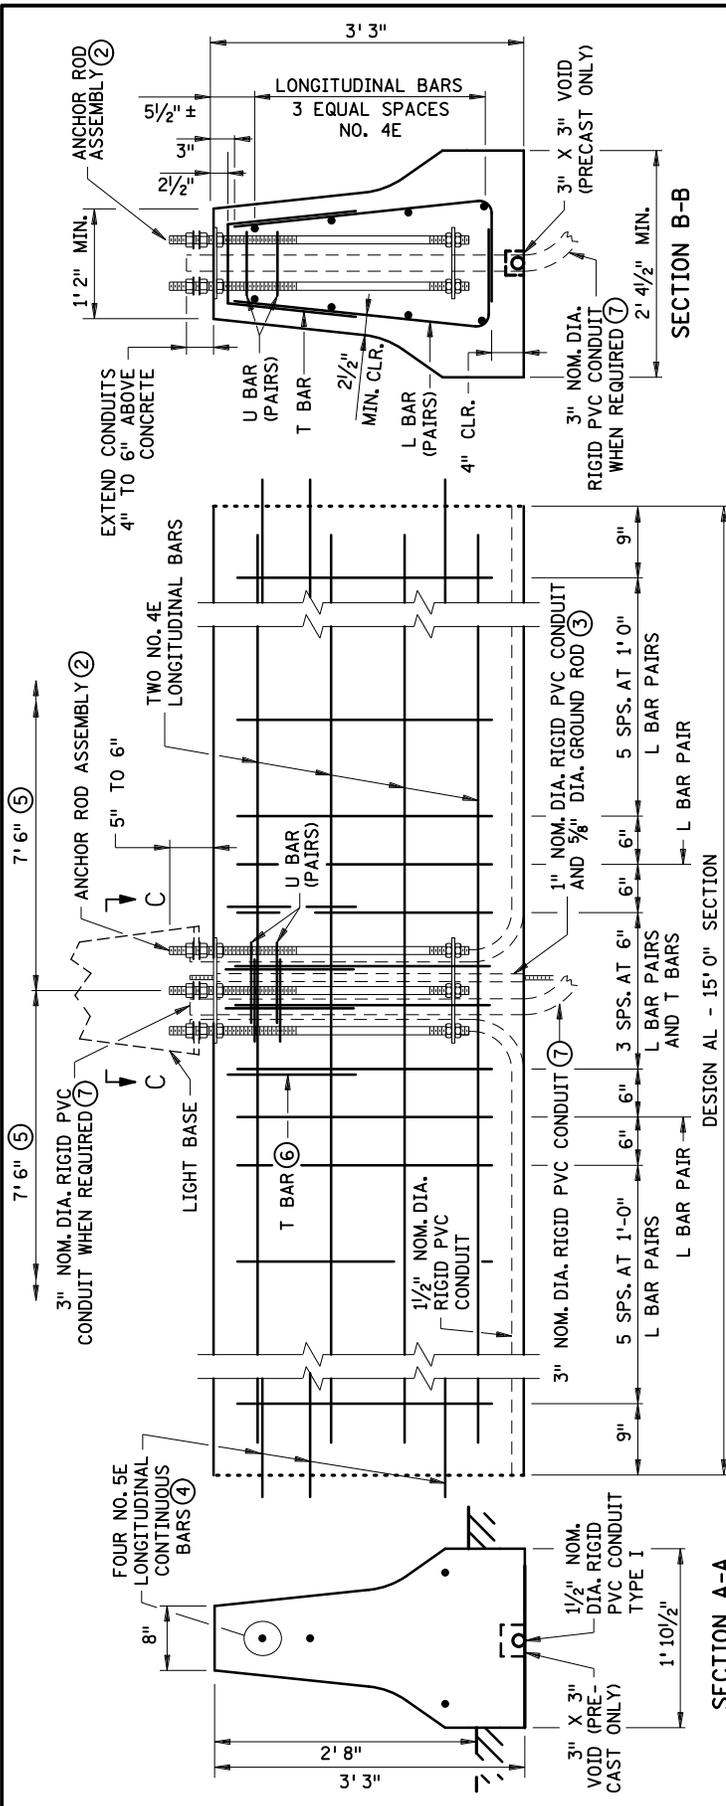

- ① FURNISH & INSTALL EPOXY COATED REINF. BARS IN ACCORDANCE WITH 3301.
- ② REFER TO STANDARD PLATE 8332 FOR ANCHOR ROD ASSEMBLY AND TEMPLATE DETAILS.
- ③ FURNISH & INSTALL 5/8" DIA. X 15'-0" LONG GROUND ROD ELECTRODE IN 1" NOM. DIA. RIGID PVC CONDUIT (TOP OF CONDUIT FLUSH WITH TOP OF CONCRETE) OR DIRECTLY IN CONCRETE BARRIER. EXTEND THE GROUND ROD 3" - 4" ABOVE THE TOP OF CONCRETE.
- ④ EXTEND 5 NO. 5E LONGITUDINAL BARS 3' 4" MIN. INTO DESIGN AL SECTION.
- ⑤ DO NOT PLACE CONTRACTION OR OTHER BARRIER JOINTS WITHIN 7' 6" FROM THE CENTER OF THE ANCHOR ROD ASSEMBLY.
- ⑥ PAIR T BARS WITH L BARS AT LIGHT ANCHORAGE.
- ⑦ 3" CONDUIT USED WHEN CABLES ARE CROSSING UNDER THE ROADWAY.

| REINFORCEMENT REQUIREMENTS (1) | | | |
|--------------------------------|----------|------------|-----------------|
| BAR TYPE | BAR SIZE | BAR LENGTH | NO. PER SECTION |
| LONGITUDINAL | 4E | 14' 6" | 8 |
| L | 4E | 3' 6" | 36 |
| U | 4E | 2' 2" | 4 |
| T (6) | 4E | 3' 9" | 4 |

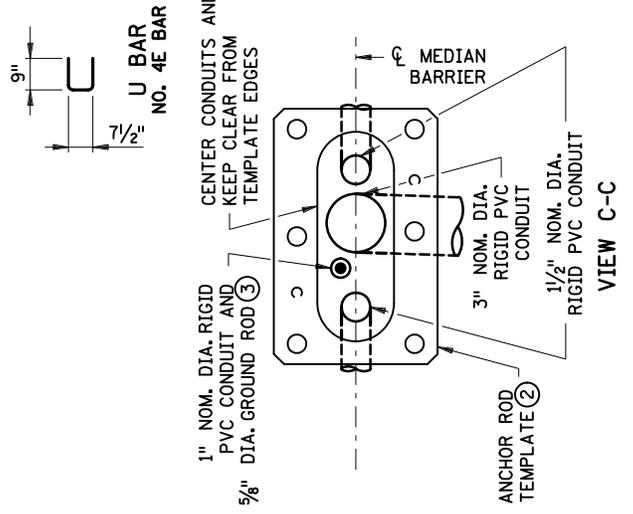


APPROVED **APRIL 14, 2020**

 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
**REINFORCED CONCRETE MEDIAN
 BARRIER TYPE F**
 (NON-GLARE SCREEN TYPE)
 LIGHT FOUNDATION - MONOLITHIC BARRIER PLACEMENT

SPECIFICATION
 REFERENCE
 2533
 2545

STANDARD
 PLATE
 NO.
8308C
 3 OF 4

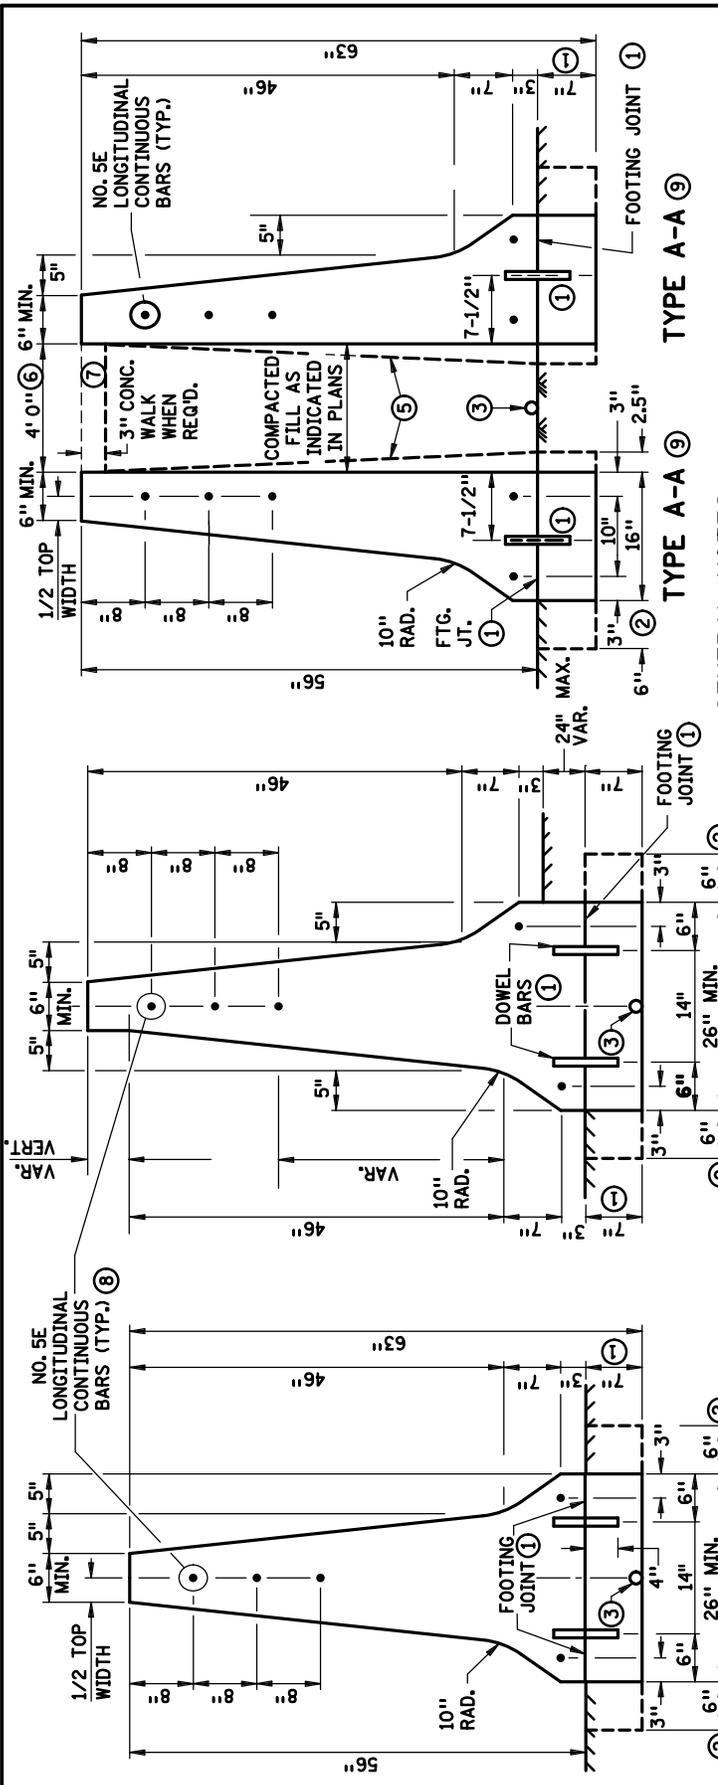

GENERAL NOTES:

0.232 CU. YDS. CONCRETE PER LIN. FT. TYPE A
 0.165 CU. YDS. CONCRETE PER LIN. FT. TYPE A-A
 CUBIC YARDS OF CONCRETE INCLUDES STANDARD FOOTING.

ALL BARS SHALL BE EPOXY COATED PER SPEC. 3301.
 FINISH ALL EDGES OF BARRIER WITH 1/2" VEE, EXCEPT WHERE OTHERWISE NOTED.

① IF FOOTING IS CONSTRUCTED SEPARATELY, A FOOTING JOINT WITH 1" DIA. DOWEL BARS 8" LONG AT 2' 0" CENTERS IS REQUIRED. DUMMY TRANSVERSE JOINTS (1-1/2" MIN. DEPTH) SHALL BE PLACED IN FOOTING AND BE ALIGNED WITH CONTRACTION JOINTS IN UPPER PORTION OF BARRIER. THE SURFACE OF THE FOOTING JOINT SHALL BE ROUGH.

② ADDITIONAL FOOTING WIDTH TO BE REQUIRED WHEN CONCRETE MEDIAN BARRIER IS ADJACENT TO BITUMINOUS PAVEMENT OR BITUMINOUS SHOULDER.

③ WHEN REQUIRED, PROVIDE A 1-1/2" NOMINAL DIAMETER PVC-TYPE I CONDUIT (SPEC. 3803) IN FIXED FORM OR SLIP FORM CONSTRUCTED BARRIER, OR 3" X 3" VOID IN PRECAST BARRIER FOR LIGHTING CONDUIT. LOCATE AS DIRECTED BY PLAN OR ENGINEER.

④ WHEN THE BARRIER IS PRECAST, THE TRANSITION SECTION MAY BE CAST IN THREE 12' LONG SECTIONS.


⑤ PERMISSIBLE IF SLIP FORMED.

⑥ UNLESS OTHERWISE NOTED IN PLANS.

⑦ CONCRETE WALK BETWEEN TYPE A-A BARRIERS MAY BE SLOPED IF BARRIER TOPS ARE NOT THE SAME ELEVATION.

⑧ SEE SHEET 2 FOR BILL OF REINFORCEMENT AND CONSTRUCTION NOTES.

⑨ SHALL NOT USE ONE SIDE OF BARRIER TYPE A-A AS FREE-STANDING SYSTEM. MUST USE BOTH DETAILS AS SHOWN OR SINGLE BARRIER FULLY ABUTTED TO COMPACTED BACKFILL.

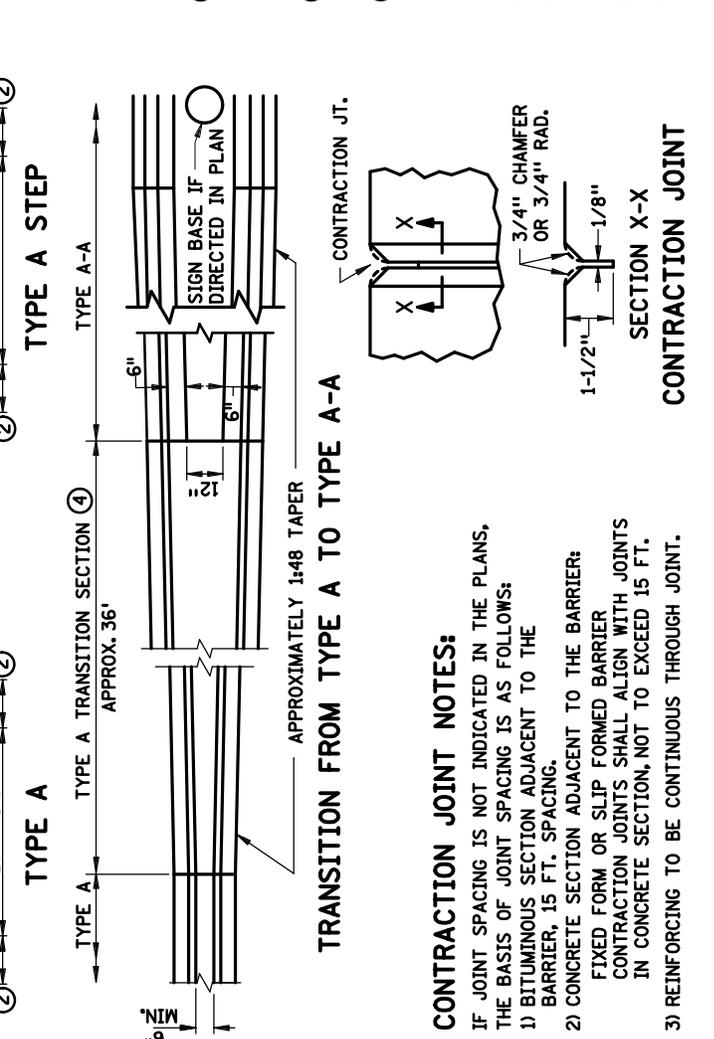

APPROVED **APRIL 14, 2020**

Rom S...

STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION

**REINFORCED CONCRETE MEDIAN
 BARRIER TYPE F & GLARE SCREEN**

DESIGN 8309

SPECIFICATION
 REFERENCE

2533

STANDARD
 PLATE
 NO.

8309C

1 OF 4


ELEVEN - NO. 5E VERTICAL BARS "A" AT 6" O.C. = 5'-0"

TWO - NO. 5E X 8'-0" LONG LONGITUDINAL BARS


NO. 5E LONGITUDINAL CONTINUOUS BARS

2" CLR TYP.

3"

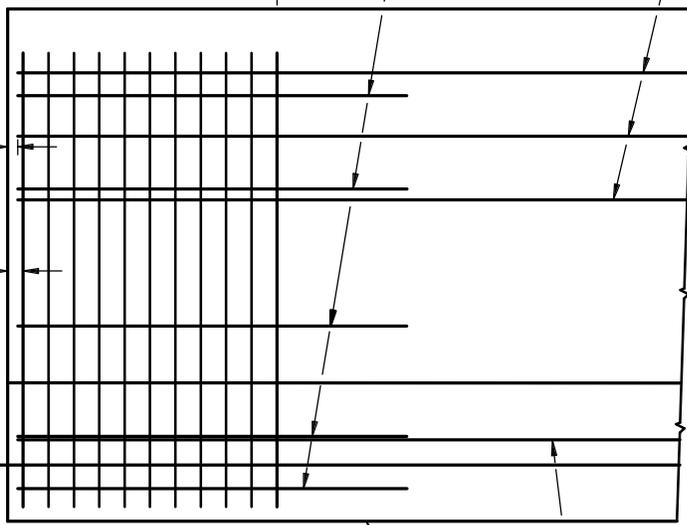


ELEVATION

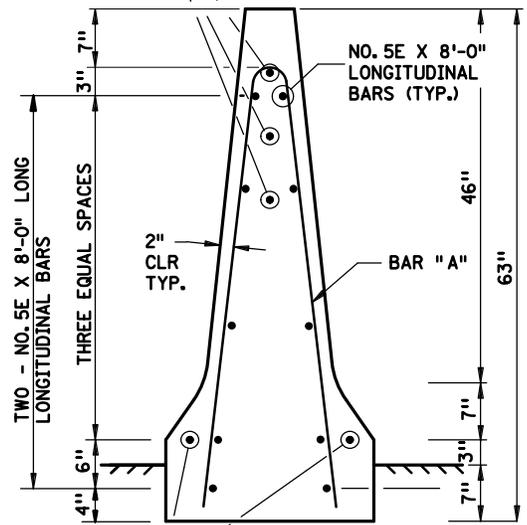

SECTION E-E
TYPE A
(MONOLITHIC FOOTING SHOWN)

END ANCHORAGE DETAIL ①



BAR "A" (NO. 5E)

NOTES:

- ① END ANCHORAGE MUST BE PLACED AT BOTH ENDS OF THE BARRIER AND AT ANY EXPANSION JOINT/OPEN JOINT. EXPANSION JOINTS SHALL BE PROVIDED IN THE BARRIERS TO MATCH EXPANSION JOINTS IN RIGID PAVEMENT, AT BRIDGE APPROACHES, OR AT OTHER STRUCTURES, WHERE UNCONTROLLED LONGITUDINAL MOVEMENT MAY BE OBJECTIONABLE.
- ② IF FOOTING IS CONSTRUCTED SEPARATELY, A FOOTING JOINT WITH NO. 8E DOWEL BARS 8" LONG AT 2'-0" CENTERS IS REQUIRED. DUMMY TRANSVERSE JOINTS (1-1/2" MIN. DEPTH WALL BE PLACED IN FOOTING AND BE ALIGNED WITH CONSTRUCTION JOINTS IN UPPER PORTION OF BARRIER. THE SURFACE OF THE FOOTING JOINT SHALL BE ROUGH.
- ③ ALL REBARS SHALL BE GRADE 60 STEEL AND SHALL BE EPOXY COATED, PER SPEC. 3301.
- ④ MINIMUM LAP SPLICE IS 2'-11" FOR ALL BARS.

GENERAL CONSTRUCTION NOTES:

- A. CONSTRUCTION METHOD SHALL BE CONTRACTOR'S OPTION: CAST-IN-PLACE (FIXED FORM OR SLIP FORM) OR PRECAST.
- B. PRECAST SECTIONS SHALL WEIGH A MINIMUM OF 940 LBS./FT. (TYPE A WITH STANDARD FOOTING). PROVISIONS SHALL BE MADE FOR THE INTERCONNECTION OF INDIVIDUAL SECTIONS PROVIDING LATERAL RESISTANCE EQUIVALENT TO THAT OF THE BARRIER SECTION ITSELF.
- C. CONTRACTOR SHALL PROVIDE ALL NECESSARY SUPPORTS TO MAINTAIN LONGITUDINAL REBARS AT DIMENSIONS SHOWN ON THE PLAN DURING SLIP FORMING.
- D. CONTRACTOR SHALL PROVIDE VERTICAL SUPPORTS WITH 2'-0" MAX. SPACING TO MAINTAIN LONGITUDINAL REBARS AT DIMENSIONS SHOWN ON THE PLAN DURING FIXED FORMING.
- E. PAY QUANTITIES WILL NOT BE ADJUSTED AS A RESULT OF SELECTING ONE OF THE CONSTRUCTION METHODS.

BILL OF REINFORCEMENT ③

| BAR SIZE | LENGTH PER BAR | NO. OF BAR | BAR SHAPE | BAR LOCATION |
|----------|----------------|------------|-----------|-----------------|
| 5E | --- | --- | STR | LONGITUDINAL ④ |
| 5E | 8'-0" | 20* | STR | LONGIT. AT ENDS |
| 5E | 9'-0" | 22* | BENT | VERT. AT ENDS |

* NUMBERS PER TWO ENDS


APPROVED APRIL 14, 2020

Rom S. J.
STATE DESIGN ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION
**REINFORCED CONCRETE MEDIAN
BARRIER TYPE F & GLARE SCREEN**
DESIGN 8309
GENERAL CONSTRUCTION NOTES & END ANCHORAGE

SPECIFICATION
REFERENCE
2533

STANDARD
PLATE
NO.
8309C
2 OF 4

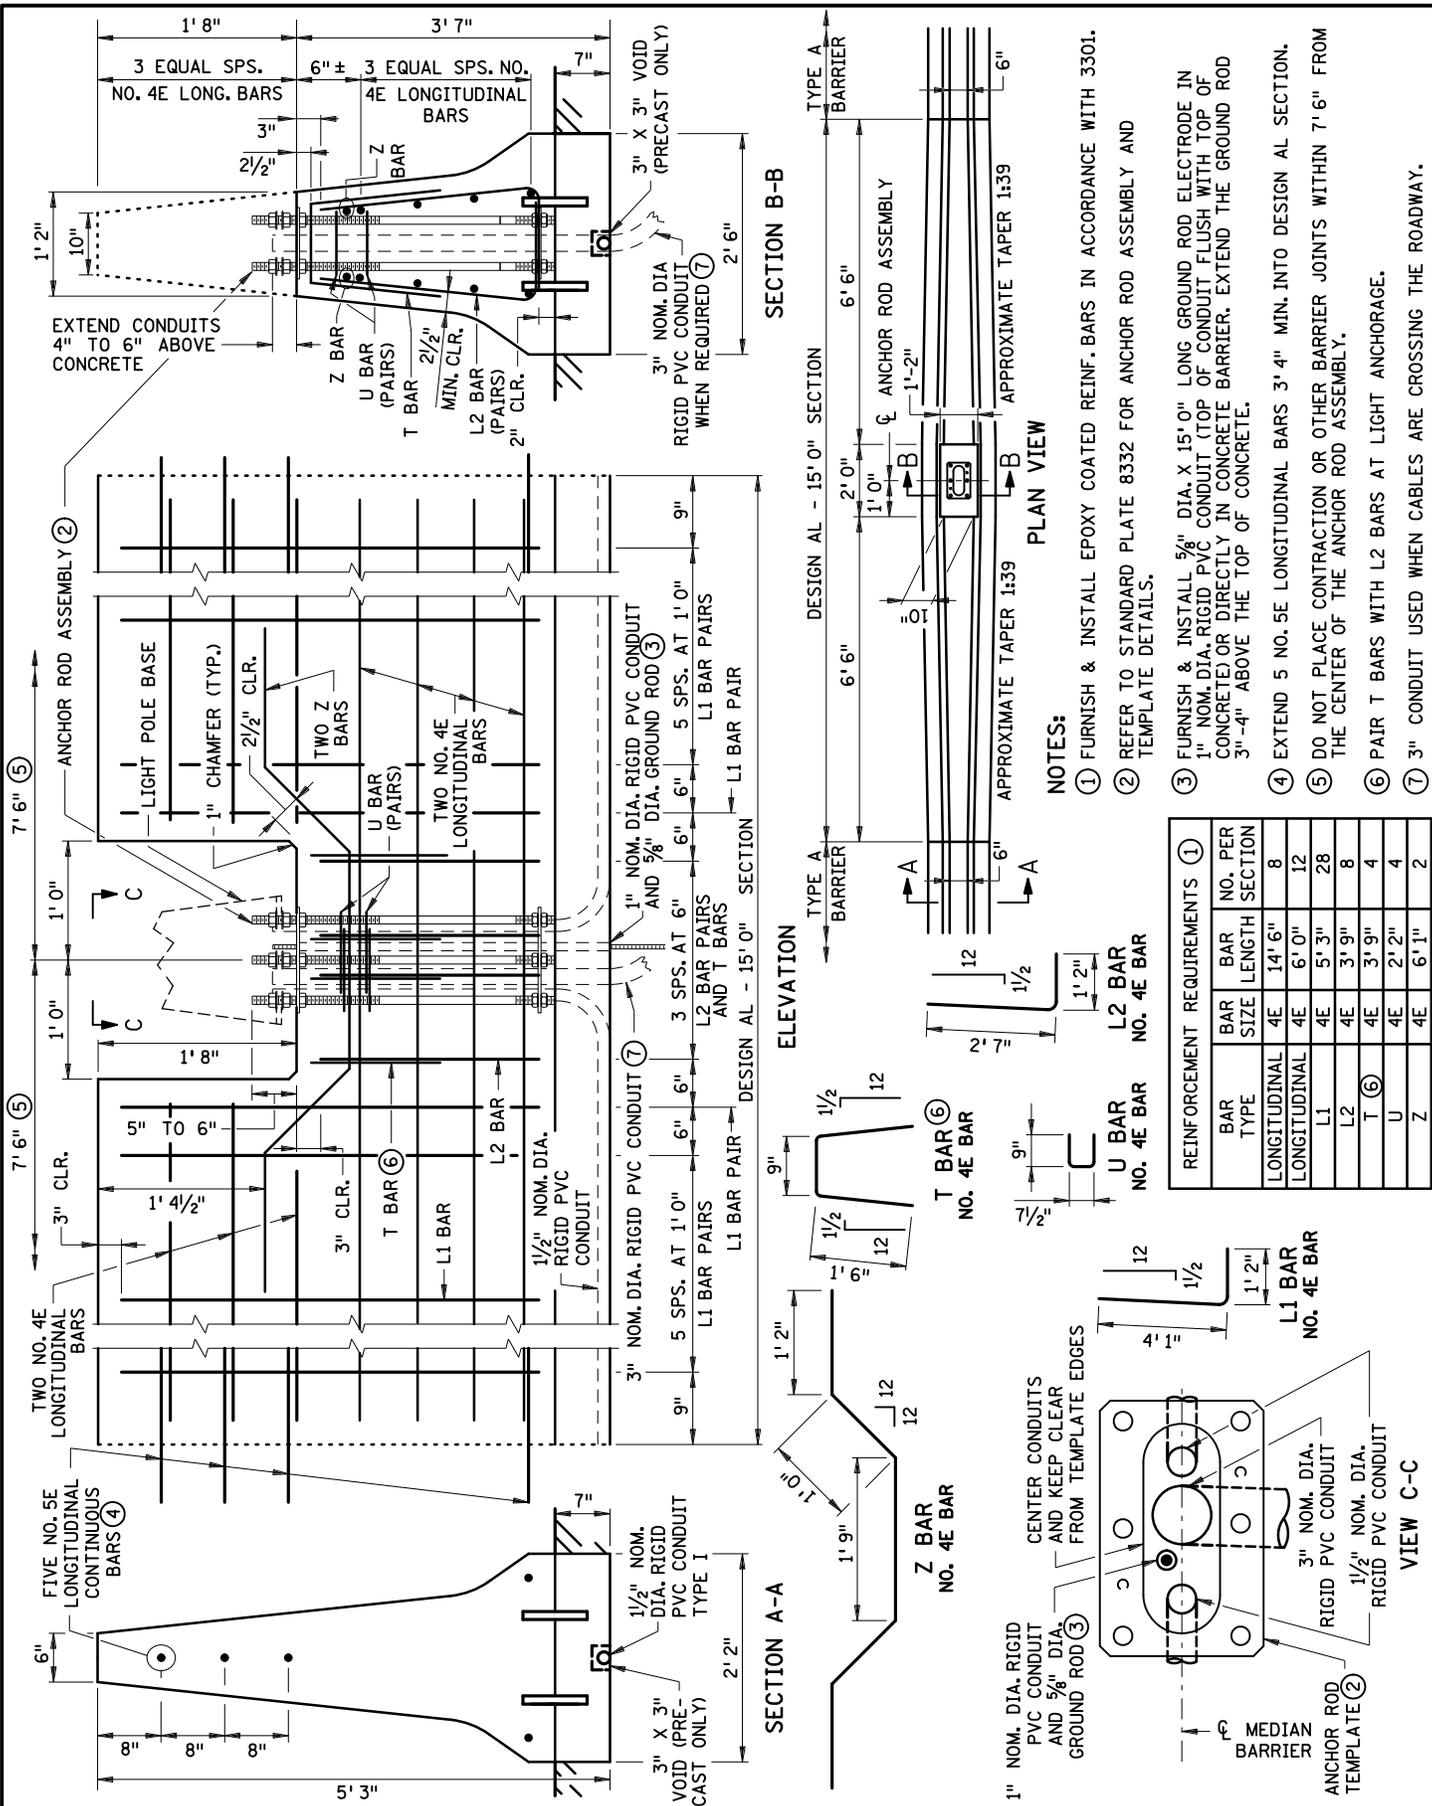

NOTES:

- ① FURNISH & INSTALL EPOXY COATED REINF. BARS IN ACCORDANCE WITH 3301.
- ② REFER TO STANDARD PLATE 8332 FOR ANCHOR ROD ASSEMBLY AND TEMPLATE DETAILS.
- ③ FURNISH & INSTALL 5/8" DIA. X 15'-0" LONG GROUND ROD ELECTRODE IN 1" NOM. DIA. RIGID PVC CONDUIT (TOP OF CONDUIT FLUSH WITH TOP OF CONCRETE) OR DIRECTLY IN CONCRETE BARRIER. EXTEND THE GROUND ROD 3'-4" ABOVE THE TOP OF CONCRETE.
- ④ EXTEND 5 NO. 5E LONGITUDINAL BARS 3'-4" MIN. INTO DESIGN AL SECTION.
- ⑤ DO NOT PLACE CONTRACTION OR OTHER BARRIER JOINTS WITHIN 7'6" FROM THE CENTER OF THE ANCHOR ROD ASSEMBLY.
- ⑥ PAIR T BARS WITH L2 BARS AT LIGHT ANCHORAGE.
- ⑦ 3" CONDUIT USED WHEN CABLES ARE CROSSING THE ROADWAY.

REINFORCEMENT REQUIREMENTS

| BAR TYPE | BAR SIZE | BAR LENGTH | NO. PER SECTION |
|--------------|----------|------------|-----------------|
| LONGITUDINAL | 4E | 14'6" | 8 |
| LONGITUDINAL | 4E | 6'0" | 12 |
| L1 | 4E | 5'3" | 28 |
| L2 | 4E | 3'9" | 8 |
| T | 4E | 3'9" | 4 |
| U | 4E | 2'2" | 4 |
| Z | 4E | 6'1" | 2 |


APPROVED APRIL 14, 2020

 STATE DESIGN ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
**REINFORCED CONCRETE MEDIAN
 BARRIER TYPE F & GLARE SCREEN**
 LIGHT FOUNDATION - BARRIER ON FOOTING

SPECIFICATION
 REFERENCE
 2533
 2545

STANDARD
 PLATE
 NO.
8309C
 4 OF 4

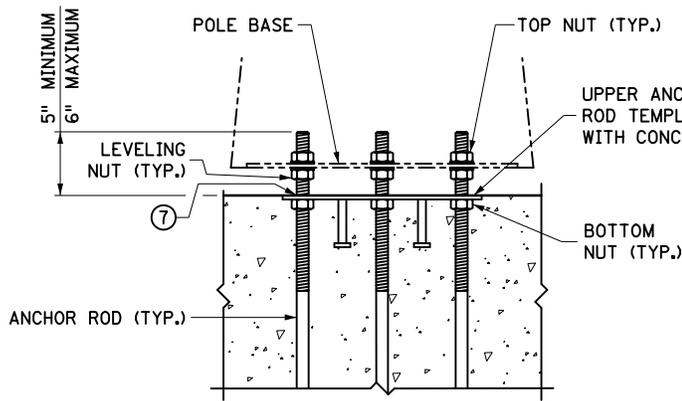


**PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY
AND HEX NUT POSITIONS AFTER
POLE INSTALLATION**

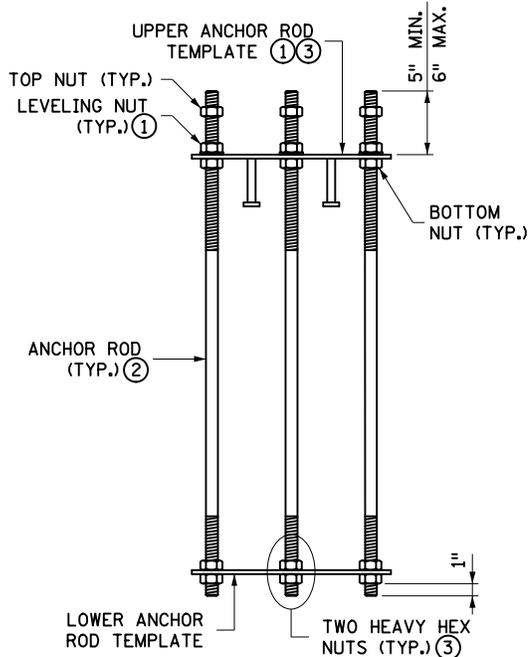


ANCHOR ROD ASSEMBLY

| STANDARD BARRIER AND PARAPET TYPES (SEE PLANS FOR TYPE) | ANCHOR ROD LENGTH (5) |
|--|--------------------------|
| CONCRETE MEDIAN BARRIER SINGLE SLOPE | 3' 5" |
| CONCRETE MEDIAN BARRIER TYPE F | 3' 1" |
| CONCRETE MEDIAN BARRIER TYPE F W/GLARE SCREEN | 3' 5" |
| RETAINING WALL CONCRETE PARAPET (TYPE P-1) | 2' 9" |
| RETAINING WALL CONCRETE PARAPET (TYPE P-4) | 3' 1" |
| RETAINING WALL CONCRETE BARRIER (TYPE F, TL-4) | 3' 1" |
| RETAINING WALL CONCRETE BARRIER (TYPE S, TL-4) | 3' 5" |


| ANCHOR ROD DETAILS | | |
|--|---------------------|---------------|
| TYPE | ANCHOR ROD DIAMETER | HOLE DIAMETER |
| 49' LIGHT POLES WITH TWIN ARMS 10' OR LONGER | 1/4" | 1 5/16" |
| OTHERS | 1" | 1 1/16" |

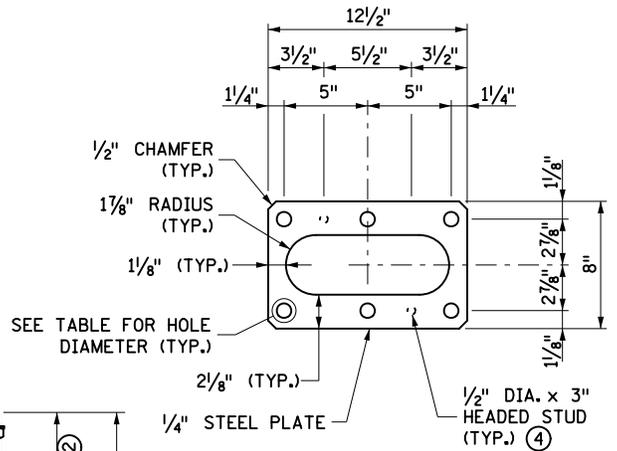

**ANCHOR ROD TEMPLATE
TWO REQUIRED PER ASSEMBLY**

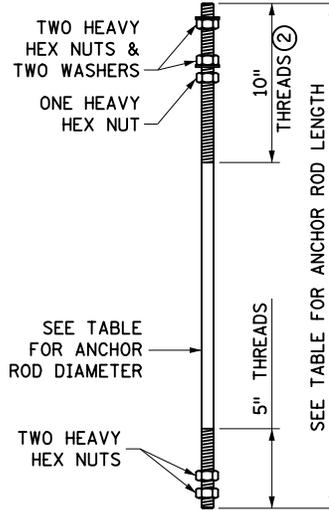

**ANCHOR ROD & HARDWARE
SIX REQUIRED PER ASSEMBLY**

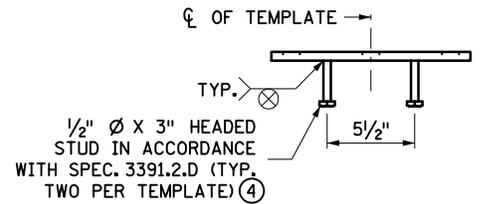

**ELEVATION VIEW
UPPER ANCHOR
ROD TEMPLATE**

NOTES:

- FURNISH AND INSTALL PLATES IN ACCORDANCE WITH SPEC. 3306, AND GALVANIZE IN ACCORDANCE WITH SPEC. 3394.
- FURNISH AND INSTALL ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.2.B. DO NOT TACK WELD.
- SUBSTITUTE MATERIALS IN ACCORDANCE WITH SPEC. 1605.
- FURNISH AND INSTALL HEAVY HEX NUTS AND FLAT WASHERS IN ACCORDANCE WITH SPEC. 3391.2.A.
- (1) TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE WITH THE LEVELING NUTS BEFORE CONCRETE PLACEMENT. AFTER CONCRETE PLACEMENT, LEAVE LEVELING NUTS SECURED AGAINST THE TEMPLATE UNTIL THE CLEANING AND LUBRICATING OF THE ANCHOR ROD CONNECTIONS BEFORE POLE PLACEMENT IS INITIATED.
- (2) PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- (3) USE A 12" LONG WRENCH TO SNUG TIGHTEN NUTS PULLING THE HANDLE WITH ONE ARM IN ONE SMOOTH MOTION.
- (4) HEADED STUDS IN ACCORDANCE WITH SPEC. 3391.2.D. ON UPPER ANCHOR ROD TEMPLATE ONLY.
- (5) FOR RETAINING WALL APPLICATIONS, PROJECT-SPECIFIC BARRIER OR PARAPET CONNECTION DETAILS ARE REQUIRED. PROVIDE 2" MINIMUM COVER FOR THE ANCHOR ROD ASSEMBLY AND VERIFY ANCHOR ROD LENGTH.
- (6) LOCALLY ADJUST TOP-OF-BARRIER PROFILE AS REQUIRED TO PROVIDE A LEVEL ANCHOR ROD TEMPLATE PLACEMENT.
- (7) REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE JOINT SEALER TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APPROVED/QUALIFIED PRODUCTS LIST UNDER BRIDGE PRODUCTS.


APPROVED APRIL 14, 2020

 STATE DESIGN ENGINEER

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
**ANCHOR ROD ASSEMBLY
 FOR LIGHT FOUNDATION-BARRIER**


SPECIFICATION REFERENCE
 2545
 3306

STANDARD PLATE NO.
8332E

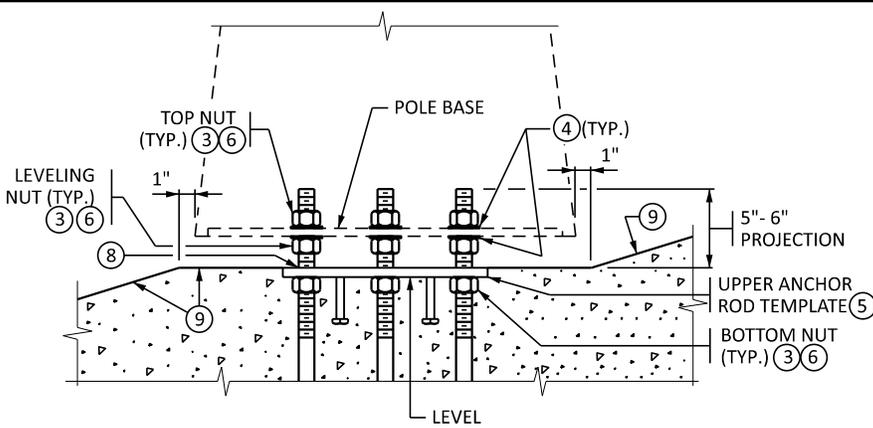


PARTIAL ELEVATION

(SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION)

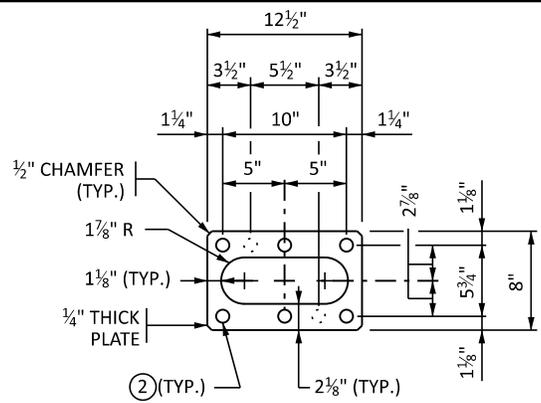

PLAN VIEW

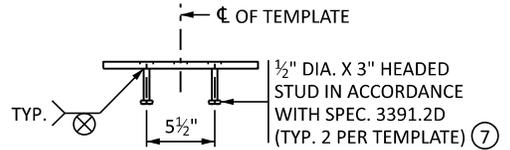


ELEVATION VIEW

SECTION A-A

ANCHOR ROD TEMPLATE

DESIGNER NOTE (REMOVE PRIOR TO PRINTING FINAL PLAN):
DESIGNER TO ENSURE REINFORCEMENT IN BARRIER OR PARAPET CAN DEVELOP YIELD STRENGTH OF ANCHOR RODS.

DESIGNER NOTE (REMOVE PRIOR TO PRINTING FINAL PLAN):
SPECIFY THE TOTAL ANCHOR ROD LENGTH IF THIS CASE IS USED.

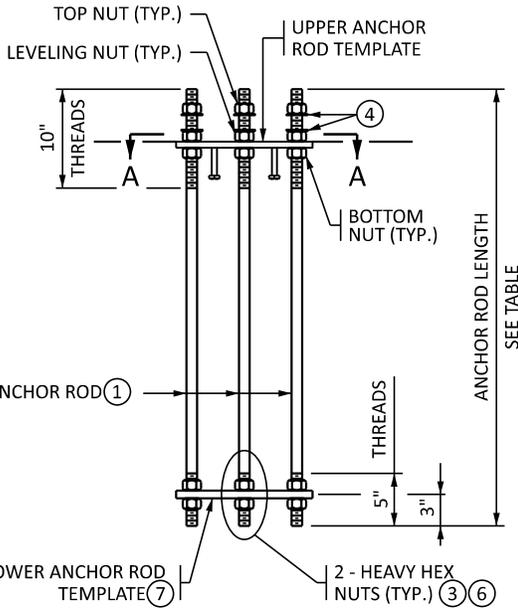

ANCHOR ROD ASSEMBLY

NOTES:

INSTALL ANCHOR ROD ASSEMBLY PLUMB WITH UPPER ANCHOR ROD TEMPLATE LEVEL AND EMBEDDED IN CONCRETE AS SHOWN IN PARTIAL ELEVATION.

PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.

GALVANIZE THREADED RODS, WASHERS, AND NUTS AFTER FABRICATION IN ACCORDANCE WITH SPEC. 3392.

FURNISH & INSTALL PLATES IN ACCORDANCE WITH SPEC. 3306, GALVANIZE IN ACCORDANCE WITH SPEC 3394.

TACK WELDING IS PROHIBITED.

SUBSTITUTE MATERIALS IN ACCORDANCE WITH SPEC. 1605.

- ① PROVIDE 1 1/4" NOMINAL DIA. ANCHOR RODS TYPE B, IN ACCORDANCE WITH SPEC. 3385.2B FOR 49' LIGHT STANDARDS WITH TWIN ARMS 10' OR LONGER (6 REQUIRED). PROVIDE 1" NOMINAL DIA. ANCHOR RODS TYPE B, IN ACCORDANCE WITH SPEC. 3385.2B FOR ALL OTHER INSTALLATIONS.
- ② 1 1/16" DIA. HOLE FOR 1" NOMINAL DIA. ANCHOR ROD, 1 5/16" DIA. HOLE FOR 1 1/4" NOMINAL DIA. ANCHOR ROD.
- ③ HEAVY HEX NUTS IN ACCORDANCE WITH SPEC. 3391.2A (30 REQ'D PER ASSEMBLY)
- ④ FLAT WASHERS IN ACCORDANCE WITH SPEC 3391.2A (12 REQ'D PER ASSEMBLY)
- ⑤ TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE WITH THE LEVELING NUTS BEFORE CONCRETE PLACEMENT. AFTER CONCRETE PLACEMENT, LEAVE LEVELING NUTS SECURED AGAINST TEMPLATE UNTIL CLEANING & LUBRICATING THE ANCHOR ROD CONNECTIONS, JUST PRIOR TO POLE INSTALLATION.
- ⑥ USE A 12" LONG WRENCH TO SNUG TIGHTEN NUTS PULLING THE HANDLE WITH ONE ARM IN ONE SMOOTH MOTION.
- ⑦ OMIT HEADED STUDS ON LOWER ANCHOR ROD TEMPLATE.
- ⑧ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APPROVED/QUALIFIED PRODUCTS LIST UNDER BRIDGE PRODUCTS.
- ⑨ CAST LEVEL CONCRETE SURFACE BENEATH LIGHT FIXTURE. SLOPE ADJACENT CONCRETE, AS SHOWN ON SLOPED OR SUPERELEVATED BRIDGES.

| STANDARD BARRIER AND PARAPET TYPES (SEE PLANS FOR TYPE) | ANCHOR ROD LENGTH |
|---|-------------------------------|
| 36" TYPE "S" WITH OR WITHOUT CONCRETE W. C. * | 3'-5" |
| 42" TYPE "S" WITH OR WITHOUT CONCRETE W. C. * | 3'-11" |
| 54" TYPE "S" WITH OR WITHOUT CONCRETE W. C. * | 4'-11" |
| 32" CONCRETE PARAPET (TYPE P1) WITH OR WITHOUT CONCRETE WEARING COURSE | 3'-1" |
| 32" CONCRETE PARAPET (TYPE P1) WITH OR WITHOUT CONCRETE WEARING COURSE WITH RAISED SIDEWALK | 3'-1" PLUS HEIGHT OF SIDEWALK |
| 36" CONCRETE PARAPET (TYPE P2) WITH OR WITHOUT CONCRETE WEARING COURSE | 2'-2" |
| 36" CONCRETE PARAPET (TYPE P4) WITH OR WITHOUT CONCRETE WEARING COURSE | 3'-5" |
| 36" TYPE "S" ON RETAINING WALL | 3'-5" |
| 32" CONCRETE PARAPET (TYPE P1) ON RETAINING WALL | 3'-1" |
| 36" CONCRETE PARAPET (TYPE P4) ON RETAINING WALL | 3'-5" |

* USE SAME ANCHOR ROD LENGTH FOR TYPE "S" SPLIT OR SOLID MEDIAN BARRIERS.

APPROVED: DECEMBER 17, 2024

 STATE BRIDGE ENGINEER


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION

ANCHOR ROD ASSEMBLY FOR LIGHT POLES


REVISION

DETAIL NO.


B950

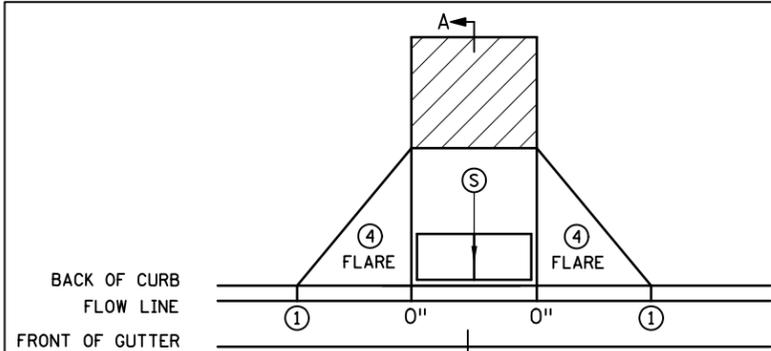


PERPENDICULAR

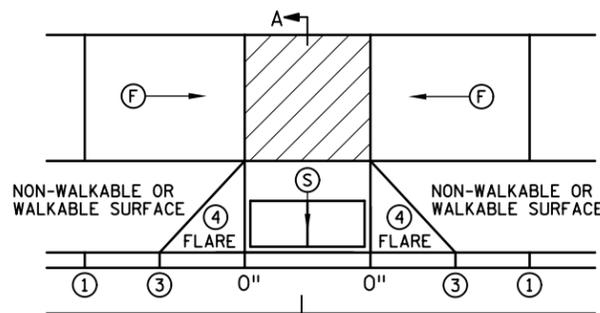


TIERED PERPENDICULAR

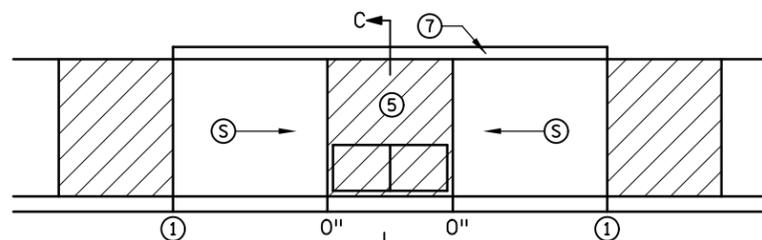


PARALLEL

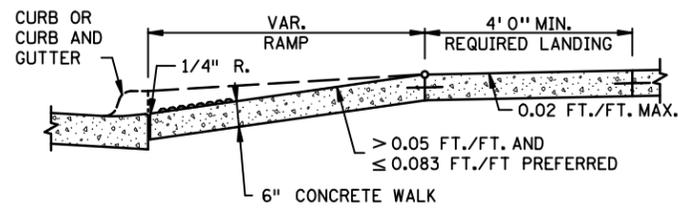


SECTION A-A
PERPENDICULAR/TIERED/DIAGONAL

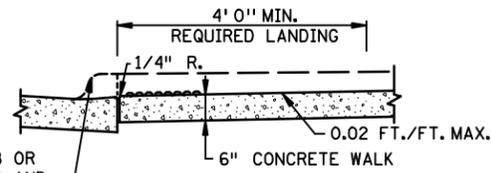


SECTION C-C
PARALLEL/DEPRESSED CORNER

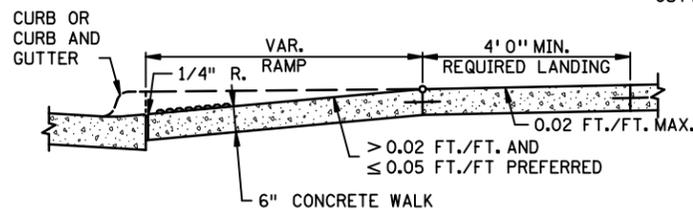


SECTION B-B
FAN

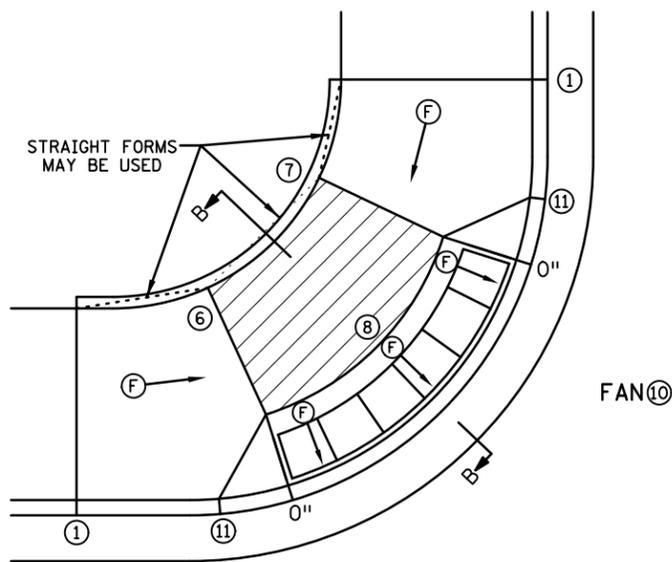


FAN ⑩

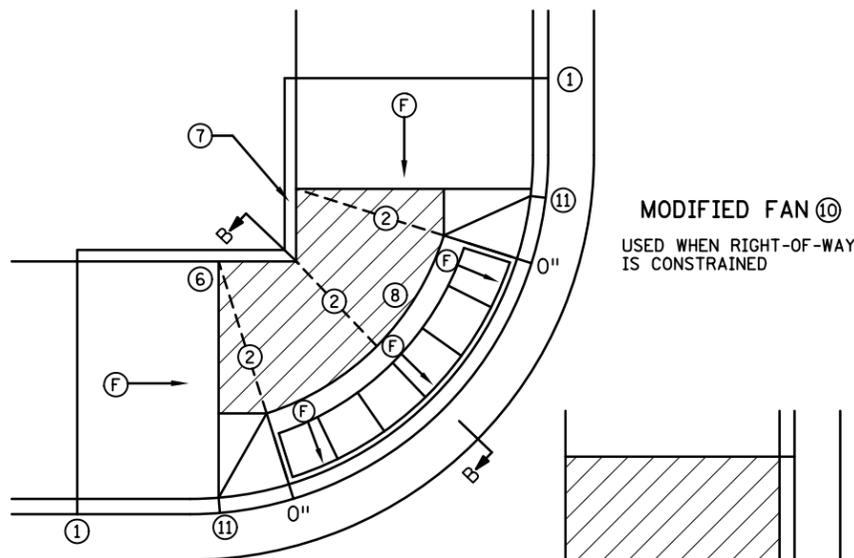

MODIFIED FAN ⑩
USED WHEN RIGHT-OF-WAY IS CONSTRAINED

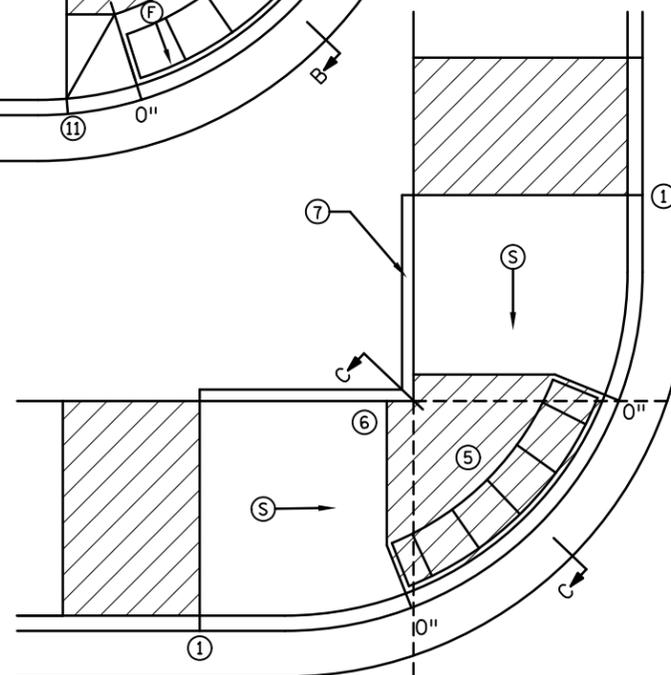

DEPRESSED CORNER

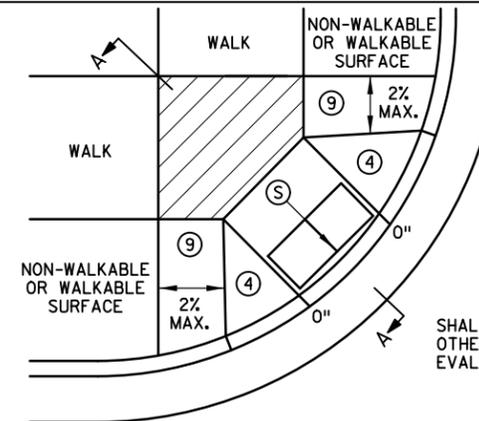

DIAGONAL

SHALL ONLY BE USED AFTER ALL OTHER CURB RAMP TYPES HAVE BEEN EVALUATED AND DEEMED IMPRACTICAL

NOTES:

- LANDINGS SHALL BE LOCATED ANYWHERE THE PEDESTRIAN ACCESS ROUTE (PAR) CHANGES DIRECTION, AT THE TOP OF RAMPS THAT HAVE RUNNING SLOPES GREATER THAN 5.0%, AND IF THE APPROACHING WALK IS INVERSE GRADE GREATER THAN 2%.
- INITIAL CURB RAMP LANDINGS SHALL BE CONSTRUCTED WITHIN 15' FROM THE BACK OF CURB, WITH 6' FROM THE BACK OF CURB BEING THE PREFERRED DISTANCE, ONLY APPLICABLE WHEN THE INITIAL RAMP RUNNING SLOPE IS OVER 5.0%.
- SECONDARY CURB RAMP LANDINGS ARE REQUIRED FOR EVERY 30" OF VERTICAL RISE WHEN THE LONGITUDINAL RUNNING SLOPE IS GREATER THAN 5.0%.
- CONTRACTION JOINTS SHALL BE CONSTRUCTED ALONG ALL GRADE BREAKS WITHIN THE PAR. 1/4" DEEP VISUAL JOINTS SHALL BE USED AT THE TOPS OF CONCRETE FLARES ADJACENT TO WALKABLE SURFACES.
- ALL GRADE BREAKS WITHIN THE PAR SHALL BE PERPENDICULAR TO THE PATH OF TRAVEL, THUS BOTH SIDES OF A SLOPED WALKING SURFACE MUST BE EQUAL LENGTH. (EXCEPT AS STATED IN ⑥ BELOW.)
- TO ENSURE RAMPS AND LANDINGS ARE PROPERLY CONSTRUCTED, ALL INITIAL LANDINGS AT A TOP OF A RAMPED SURFACE (RUNNING SLOPE GREATER THAN 2%) SHALL BE FORMED AND PLACED SEPARATELY IN AN INDEPENDENT CONCRETE POUR. FOLLOW SIDEWALK REINFORCEMENT DETAILS ON SHEET 6 OF 6 FOR ALL SEPARATELY POURED INITIAL LANDINGS.
- WHEN SIDEWALK IS AT BACK OF CURB, TOP OF CURB SHALL MATCH PROPOSED ADJACENT WALK GRADE. MAINTAIN POSITIVE BOULEVARD DRAINAGE TO TOP OF CURB.
- ALL RAMP TYPES SHOULD HAVE A MINIMUM 3' LONG RAMP LENGTH.
- 4' MINIMUM WIDTH OF DETECTABLE WARNING IS REQUIRED FOR ALL RAMPS. DETECTABLE WARNINGS SHALL CONTINUOUSLY EXTEND FOR A MIN. OF 24" IN THE PATH OF TRAVEL. DETECTABLE WARNING TO COVER THE ENTIRE PAR WIDTH OF SHARED-USE PATHS AND THE ENTIRE PAR WIDTH OF THE WALK WITH THE EXCEPTION OF 3" MAXIMUM ON EACH OUTSIDE EDGE WHICH ENSURES THE DETECTABLE WARNINGS ARE ENCASED IN CONCRETE WHEN ADJACENT TO TURF. WHEN ADJACENT TO CONCRETE FLARES 0" - 3" OFFSET IS ALLOWED.
- WHEN DESIGNING OR ORDERING RECTANGULAR DETECTABLE WARNING SURFACES SHOULD BE 6" LESS THAN THE INCOMING PAR. ARC LENGTH OF THE RADIAL DETECTABLE WARNINGS SHOULD NOT BE GREATER THAN 20 FEET.
- RECTANGULAR DETECTABLE WARNINGS SHALL BE SETBACK 3" FROM THE BACK OF CURB. RADIAL DETECTABLE WARNINGS SHALL BE SETBACK 3" MINIMUM TO 6" MAXIMUM FROM THE BACK OF CURB.

- ① MATCH FULL HEIGHT CURB.
- ② 4' MINIMUM DEPTH LANDING REQUIRED ACROSS TOP OF RAMP.
- ③ 3" HIGH CURB WHEN USING A 3' LONG RAMP, 4" HIGH CURB WHEN USING A 4' LONG RAMP.
- ④ SEE SHEET 4 OF 6, TYPICAL SIDE TREATMENT OPTIONS, FOR DETAILS ON FLARES AND RETURNED CURBS.
- ⑤ DETECTABLE WARNINGS MAY BE PART OF THE 4' X 4' MIN. LANDING AREA IF IT IS NOT FEASIBLE TO CONSTRUCT THE LANDING OUTSIDE OF THE DETECTABLE WARNING AREA.
- ⑥ THE GRADE BREAK SHALL BE PERPENDICULAR TO THE BACK OF WALK. THIS WILL ENSURE THAT THE GRADE BREAK IS PERPENDICULAR TO THE DIRECTION OF TRAVEL. (TYPICAL FOR ALL)
- ⑦ WHEN ADJACENT TO GRASS, GRADING SHALL ALWAYS BE USED WHEN FEASIBLE. V CURB, IF USED, SHALL BE PLACED OUTSIDE THE SIDEWALK LIMITS WHEN RIGHT OF WAY ALLOWS. WHEN ADJACENT TO PARKING LOTS, CONCRETE OR BITUMINOUS TAPERS LESS THAN 5% RUNNING SLOPE SHOULD BE USED OVER V CURB TO REDUCE TRIPPING HAZARDS AND FACILITATE SNOW & ICE REMOVAL.
- ⑧ A 7' MIN TOP RADIUS GRADE BREAK IS REQUIRED TO BE CONSTRUCTIBLE.
- ⑨ PAVE FULL WALK WIDTH.
- ⑩ "S" SLOPES ON FANS SHALL ONLY BE USED WHEN ALL OTHER FEASIBLE OPTIONS HAVE BEEN EVALUATED AND DEEMED IMPRACTICAL.
- ⑪ INTERMEDIATE CURB HEIGHTS TAPER SHALL RISE AT 8-10% TO A MINIMUM 3" CURB HEIGHT. REDUCE INTERMEDIATE CURB HEIGHT TO 2+ INCHES IF NECESSARY TO MATCH ADJACENT BOULEVARD OR SIDEWALK GRADES.

| LEGEND | |
|---|--|
| THESE LONGITUDINAL SLOPE RANGES SHALL BE THE STARTING POINT. IF SITE CONDITIONS WARRANT, LONGITUDINAL SLOPES UP TO 8.3% OR FLATTER ARE ALLOWED. | |
| Ⓢ | INDICATES PEDESTRIAN RAMP - SLOPE SHALL BE BETWEEN 5.0% MINIMUM AND 8.3% MAXIMUM IN THE DIRECTION SHOWN AND THE CROSS SLOPE SHALL NOT EXCEED 2.0%. |
| ⓕ | INDICATES PEDESTRIAN RAMP - SLOPE SHALL BE GREATER THAN 2.0% AND LESS THAN 5.0% IN THE DIRECTION SHOWN AND CROSS SLOPE SHALL NOT EXCEED 2.0%. |
| ▨ | LANDING AREA - 4' X 4' MIN. (5' X 5' MIN. PREFERRED) DIMENSIONS AND MAX 2.0% SLOPE IN ALL DIRECTIONS. LANDING SHALL BE FULL WIDTH OF INCOMING PAR. |
| X" | CURB HEIGHT |

LEAD EXPERT OFFICE
JEFFREY PERKINS
OPERATIONS DIVISION



PEDESTRIAN CURB RAMP DETAILS

APPROVED: 11-04-2021
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER


STANDARD PLAN
5-297.250

1 OF 6


STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

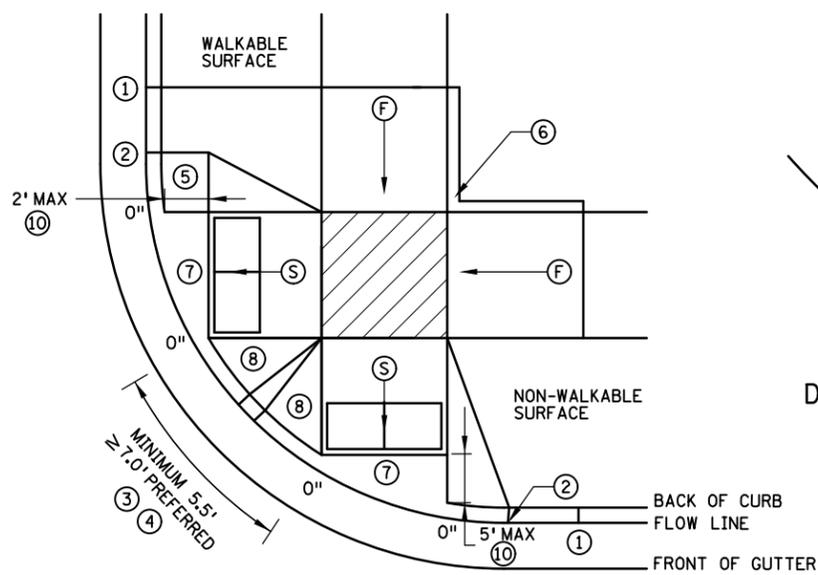


COMBINED DIRECTIONAL

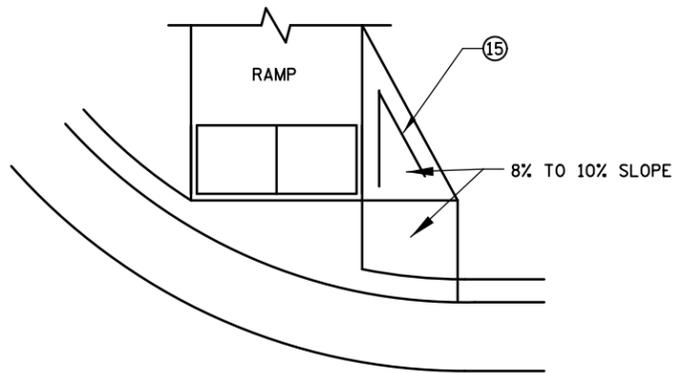


DIRECTIONAL RAMP WALKABLE FLARE

IF NON-CONCRETE BLVD. IS CONSTRUCTED AND IS LESS THAN 2' IN WIDTH AT TOP OF CURB TRANSITION, PAVE CONCRETE RAMP WIDTH TO ADJACENT BACK OF CURB.

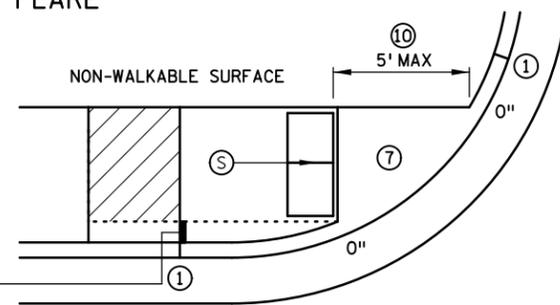


STANDARD ONE-WAY DIRECTIONAL ⑨

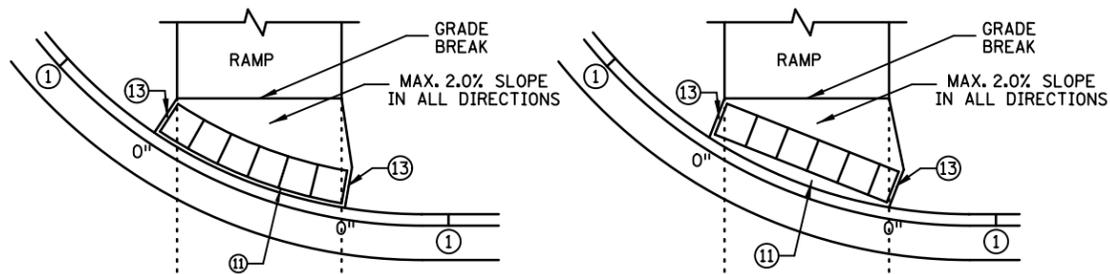

DETECTABLE WARNING PLACEMENT WHEN SETBACK CRITERIA IS EXCEEDED ⑫

ONE-WAY DIRECTIONAL WITH DETECTABLE WARNING AT BACK OF CURB

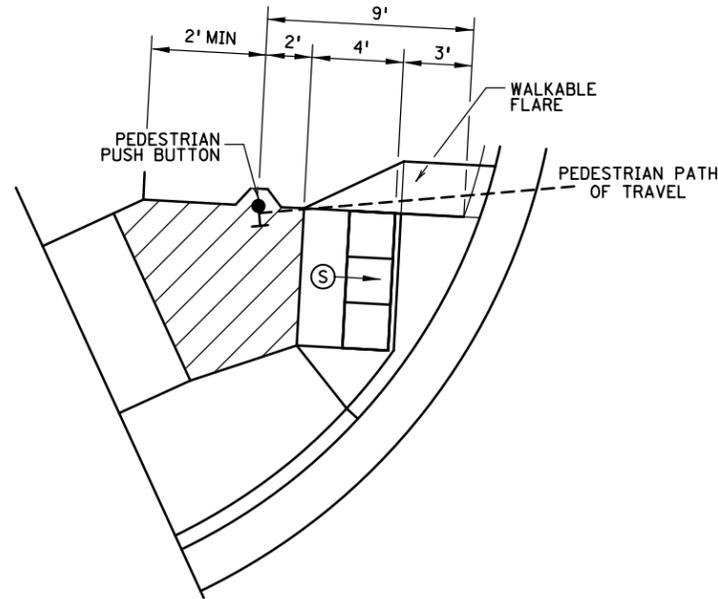

SEMI-DIRECTIONAL RAMP ③④⑨

3' DOME SETBACK, 4' LONG RAMP AND PUSH BUTTON 9' FROM THE BACK OF CURB
 PRIMARILY USED FOR APS APPLICATIONS WHERE THE PAR DOES NOT CONTINUE PAST THE PUSH BUTTON (DEAD-END SIDEWALK)

NOTES:

LANDINGS SHALL BE LOCATED ANYWHERE THE PEDESTRIAN ACCESS ROUTE (PAR) CHANGES DIRECTION, AT THE TOP OF RAMPS THAT HAVE RUNNING SLOPES GREATER THAN 5.0%, AND IF THE APPROACHING WALK IS INVERSE GRADE.

INITIAL CURB RAMP LANDINGS SHALL BE CONSTRUCTED WITHIN 15' FROM THE BACK OF CURB, WITH 6' FROM THE BACK OF CURB BEING THE PREFERRED DISTANCE, ONLY APPLICABLE WHEN THE INITIAL RAMP RUNNING SLOPE IS OVER 5.0%.

SECONDARY CURB RAMP LANDINGS ARE REQUIRED FOR EVERY 30" OF VERTICAL RISE WHEN THE LONGITUDINAL SLOPE IS GREATER THAN 5.0%.

CONTRACTION JOINTS SHALL BE CONSTRUCTED ALONG ALL GRADE BREAKS WITHIN THE PAR. 1/4" DEEP VISUAL JOINTS SHALL BE USED AT THE TOP GRADE BREAK OF CONCRETE FLARES ADJACENT TO WALKABLE SURFACES.

ALL GRADE BREAKS WITHIN THE PAR SHALL BE PERPENDICULAR TO THE PATH OF TRAVEL. THUS BOTH SIDES OF A SLOPED WALKING SURFACE MUST BE EQUAL LENGTH.

TO ENSURE INITIAL RAMPS AND INITIAL LANDINGS ARE PROPERLY CONSTRUCTED, LANDINGS SHALL BE CAST SEPARATELY, FOLLOW SIDEWALK REINFORCEMENT DETAILS ON SHEET 6 AND THE ADA SPECIAL PROVISION (PROSECUTION OF WORK).

TOP OF CURB SHALL MATCH PROPOSED ADJACENT WALK GRADE.

WHEN THE BOULEVARD IS 4' WIDE OR LESS, THE TOP OF CURB TAPER SHALL MATCH THE RAMP SLOPES TO REDUCE NEGATIVE BOULEVARD SLOPES FROM THE TOP BACK OF CURB TO THE PAR.

ALL RAMP TYPES SHOULD HAVE A MINIMUM 3' LONG RAMP LENGTH.


4' MINIMUM WIDTH OF DETECTABLE WARNING IS REQUIRED FOR ALL RAMPS. DETECTABLE WARNINGS SHALL CONTINUOUSLY EXTEND FOR A MIN. OF 24" IN THE PATH OF TRAVEL. DETECTABLE WARNING TO COVER THE ENTIRE PAR WIDTH OF SHARED-USE PATHS AND THE ENTIRE PAR WIDTH OF THE WALK WITH THE EXCEPTION OF 3" MAXIMUM ON EACH OUTSIDE EDGE WHICH ENSURES THE DETECTABLE WARNINGS ARE ENCASED IN CONCRETE WHEN ADJACENT TO TURF. WHEN ADJACENT TO CONCRETE FLARES 0" - 3" OFFSET IS ALLOWED.

WHEN DESIGNING OR ORDERING RECTANGULAR DETECTABLE WARNING SURFACES SHOULD BE 6" LESS THAN THE INCOMING PAR. ARC LENGTH OF THE RADIAL DETECTABLE WARNINGS SHOULD NOT BE GREATER THAN 20 FEET.


RADIAL DETECTABLE WARNINGS SHALL BE SETBACK 3" MINIMUM TO 6" MAXIMUM FROM THE BACK OF CURB. SEE NOTES ⑩ & ⑪ FOR INFORMATION REGARDING RECTANGULAR DETECTABLE WARNING PLACEMENT.

- ① MATCH FULL CURB HEIGHT.
- ② 3" HIGH CURB WHEN USING A 3' LONG RAMP
4" HIGH CURB WHEN USING A 4' LONG RAMP.
- ③ 3" MINIMUM CURB HEIGHT (5.5' MIN. DISTANCE REQUIRED BETWEEN DOMES)
4" PREFERRED (7' MIN. DISTANCE REQUIRED BETWEEN DOMES).
- ④ THE "BUMP" IN BETWEEN THE RAMPS SHOULD NOT BE IN THE PATH OF TRAVEL FOR COMBINED DIRECTIONAL RAMPS. IF THIS OCCURS MODIFY THE RAMP LOCATION OR SWITCH RAMP TO A FAN/DEPRESSED CORNER.
- ⑤ WHEN USING CONCRETE PAVED FLARES ON THE OUTSIDE OF DIRECTIONAL RAMPS, AND ADJACENT TO A WALKABLE SURFACE, DIRECTIONAL RAMP FLARES SHALL BE USED. SEE THE DETAIL ON THIS SHEET.
- ⑥ GRADING SHALL ALWAYS BE USED WHEN FEASIBLE. V CURB, IF USED, SHALL BE PLACED OUTSIDE THE SIDEWALK LIMITS WHEN RIGHT OF WAY ALLOWS. WHEN ADJACENT TO PARKING LOTS, CONCRETE OR BITUMINOUS TAPERS SHOULD BE USED OVER V CURB TO REDUCE TRIPPING HAZARDS AND FACILITATE SNOW & ICE REMOVAL.
- ⑦ MAX. 2.0% SLOPE IN ALL DIRECTIONS IN FRONT OF GRADE BREAK AND DRAIN TO FLOW LINE. SHALL BE CONSTRUCTED INTEGRAL WITH CURB AND GUTTER.
- ⑧ 8% TO 10% WALKABLE FLARE.
- ⑨ PLACE DOMES AT THE BACK OF CURB WHEN ALLOWABLE SETBACK CRITERIA IS EXCEEDED.
- ⑩ FRONT EDGE OF DETECTABLE WARNING SHALL BE SET BACK 2' MAXIMUM WHEN ADJACENT TO WALKABLE SURFACE, AND 5' MAXIMUM WHEN ADJACENT TO NON-WALKABLE SURFACE WITH ONE CORNER SET 3" FROM BACK OF CURB. A WALKABLE SURFACE IS DEFINED AS A PAVED SURFACE ADJACENT TO A CURB RAMP WITHOUT RAISED OBSTACLES THAT COULD MISTAKENLY BE TRAVERSED BY A USER WHO IS VISUALLY IMPAIRED.
- ⑪ RECTANGULAR DETECTABLE WARNINGS MAY BE SETBACK UP TO 9" FROM THE BACK OF CURB WITH CORNERS SET 3" FROM BACK OF CURB. IF 9" SETBACK IS EXCEEDED USE RADIAL DETECTABLE WARNINGS.
- ⑫ FOR DIRECTIONAL RAMPS WITH THE DETECTABLE WARNINGS PLACED AT THE BACK OF CURB, THE DETECTABLE WARNINGS SHALL COVER THE ENTIRE WIDTH OF THE WALK/PATH. THIS ENSURES A DETECTABLE EDGE AND HELPS ELIMINATE THE CURB TAPER OBSTRUCTING THE PATH OF PEDESTRIAN TRAVEL.
- ⑬ THE CONCRETE WALK SHALL BE FORMED AND CONSTRUCTED PERPENDICULAR TO THE BACK OF CURB. MAINTAIN 3" BETWEEN EDGE OF DOMES AND EDGE OF CONCRETE.
- ⑭ TO BE USED FOR ALL DIRECTIONAL RAMPS, EXCEPT WHERE DOMES ARE PLACED ALONG THE BACK OF CURB.
- ⑮ PLACE 2 NO. 4 BARS 4 INCHES FROM SIDE OF FORMS WITH A MINIMUM 2 INCHES OF CONCRETE COVER ALONG EACH SIDE OF FLARE (INCIDENTAL).

| LEGEND | |
|---|--|
| THESE LONGITUDINAL SLOPE RANGES SHALL BE THE STARTING POINT. IF SITE CONDITIONS WARRANT, LONGITUDINAL SLOPES UP TO 8.3% OR FLATTER ARE ALLOWED. | |
| Ⓢ | INDICATES PEDESTRIAN RAMP - SLOPE SHALL BE BETWEEN 5.0% MINIMUM AND 8.3% MAXIMUM IN THE DIRECTION SHOWN AND THE CROSS SLOPE SHALL NOT EXCEED 2.0%. |
| ⓕ | INDICATES PEDESTRIAN RAMP - SLOPE SHALL BE GREATER THAN 2.0% AND LESS THAN 5.0% IN THE DIRECTION SHOWN AND CROSS SLOPE SHALL NOT EXCEED 2.0%. |
| | LANDING AREA - 4' X 4' MIN. (5' X 5' MIN. PREFERRED) DIMENSIONS AND MAX 2.0% SLOPE IN ALL DIRECTIONS. LANDING SHALL BE FULL WIDTH OF INCOMING PAR. |
| X" | CURB HEIGHT |

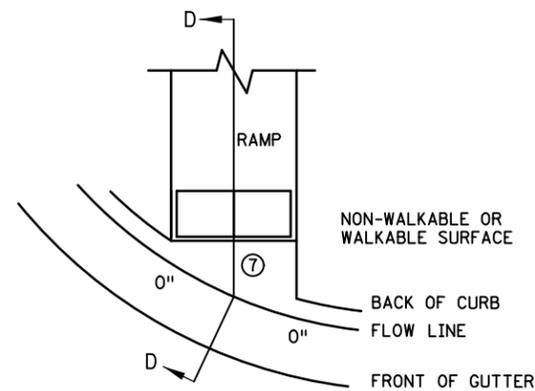

CURB FOR DIRECTIONAL RAMPS ⑭

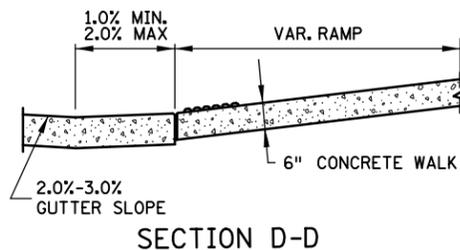

SECTION D-D

LEAD EXPERT OFFICE
 JEFFREY PERKINS
 OPERATIONS DIVISION

PEDESTRIAN CURB RAMP DETAILS

APPROVED: 11-04-2021
 REVISED:

THOMAS STYRICKI
 STATE DESIGN ENGINEER

STANDARD PLAN
 5-297.250

2 OF 6










STANDARD PLAN

STATE PROJ. NO.

SHEET NO.

TRUNK HWY.


TOTAL SHEETS

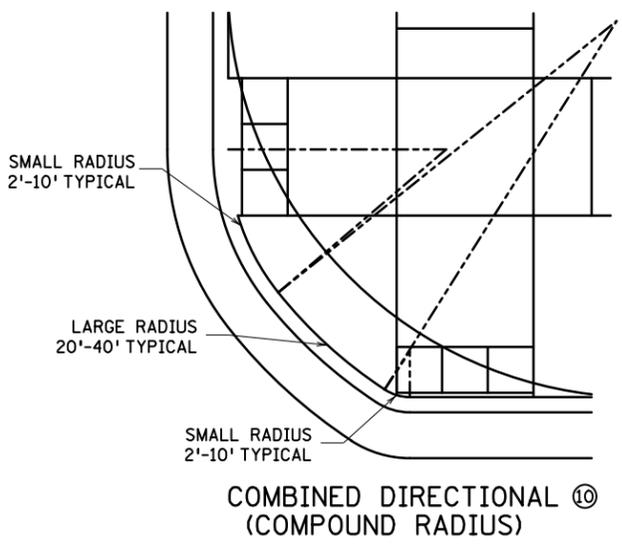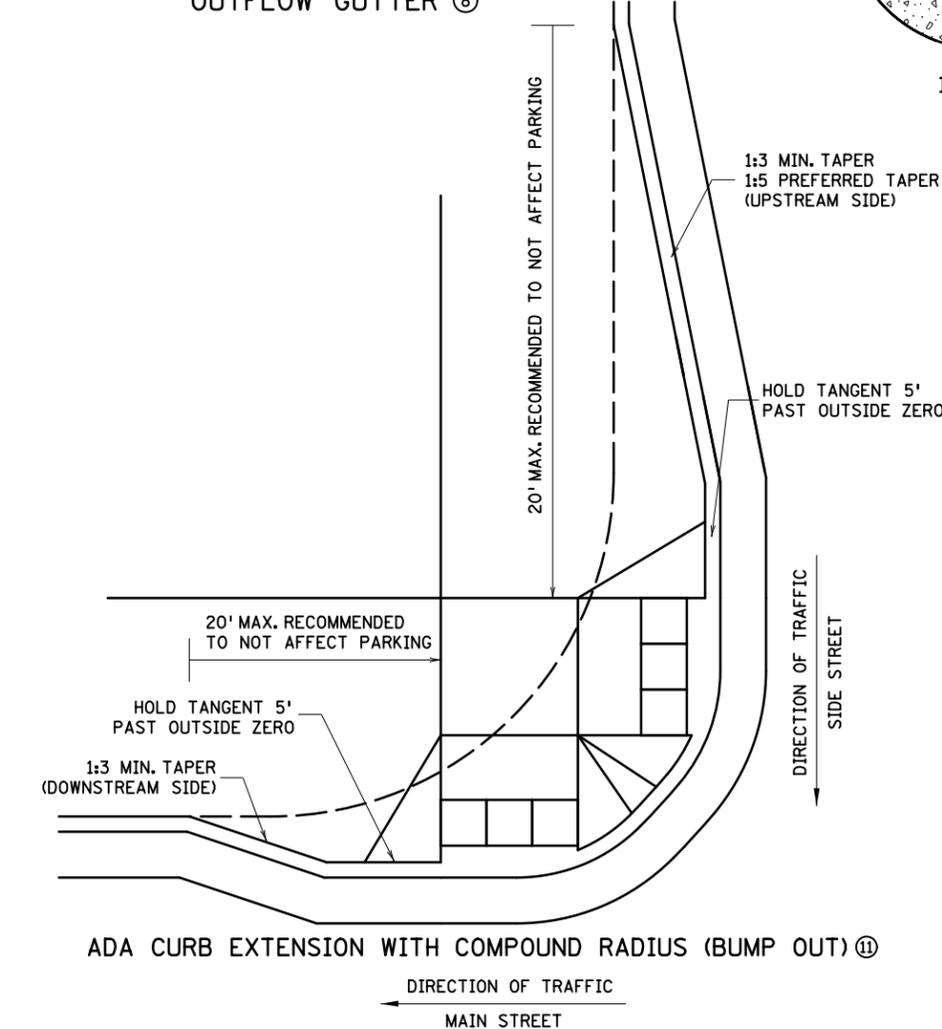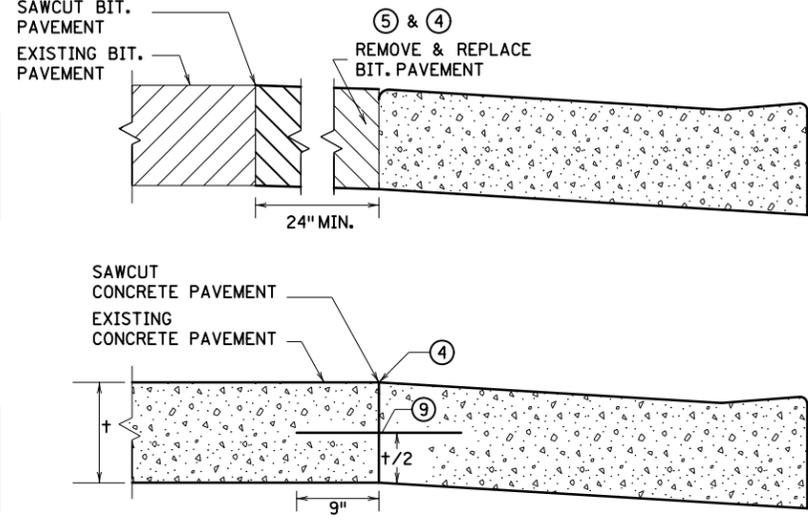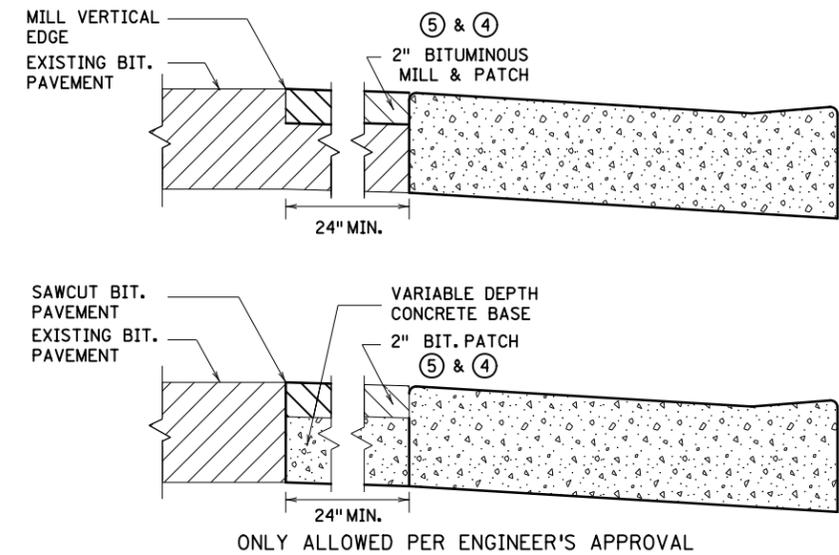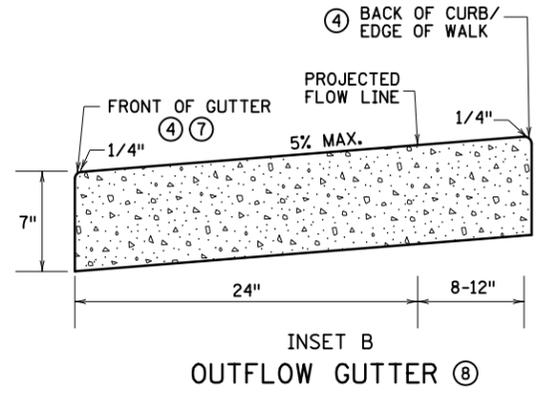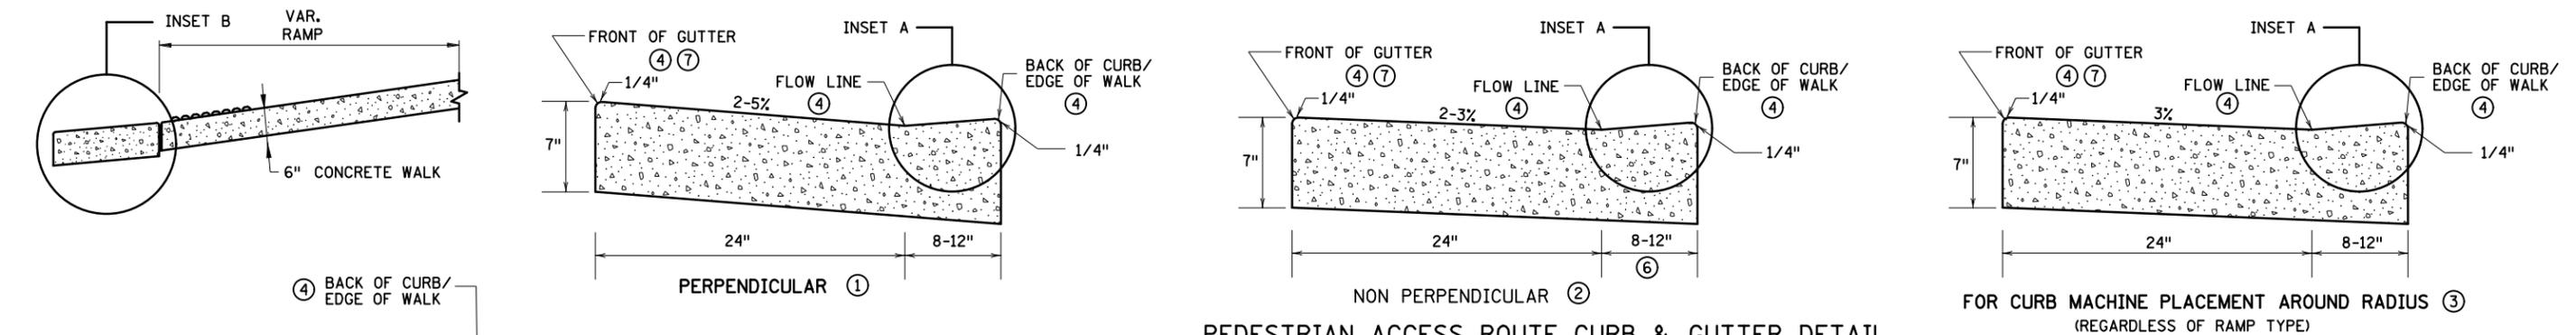


PAVEMENT TREATMENT OPTIONS IN FRONT OF CURB & GUTTER
FOR USE ON CURB RAMP RETROFITS

- NOTES:**
- POSITIVE FLOW LINE DRAINAGE SHALL BE MAINTAINED THROUGH THE PEDESTRIAN ACCESS ROUTE (PAR) AT A 2% MAXIMUM. NO PONDING SHALL BE PRESENT IN THE PAR.
 - ANY VERTICAL LIP THAT OCCURS AT THE FLOW LINE SHALL NOT BE GREATER THAN 1/4 INCH.
 - ① FOR USE AT CURB CUTS WHERE THE PEDESTRIAN'S PATH OF TRAVEL IS ASSUMED PERPENDICULAR TO THE GUTTER FLOW LINE. RAMP TYPES INCLUDE: PERPENDICULAR, TIERED PERPENDICULAR, PARALLEL, AND DIAGONAL RAMPS.
 - ② FOR USE AT CURB RAMPS WHERE THE PEDESTRIAN'S PATH OF TRAVEL IS ASSUMED NON PERPENDICULAR TO THE GUTTER FLOW LINE. RAMP TYPES INCLUDE: FANS & DEPRESSED CORNERS.
 - ③ BEGIN GUTTER SLOPE TRANSITION 10' OUTSIDE OF ALL CURB RAMPS.
 - ④ THERE SHALL BE NO VERTICAL DISCONTINUITIES GREATER THAN 1/4".
 - ⑤ ELEVATION CHANGE TAKES PLACE FROM THE EXISTING TO NEW FRONT OF GUTTER. PATCH IS USED TO MATCH THE NEW GUTTER FACE INTO THE EXISTING ROADWAY.
 - ⑥ VARIABLE WIDTH FOR DIRECTIONAL CURB APPLICATIONS. SEE SHEET 2 FOR DIRECTIONAL CURB SLOPE REQUIREMENTS.
 - ⑦ TOP FRONT OF GUTTER SHALL BE CONSTRUCTED FLUSH WITH PROPOSED ADJACENT PAVEMENT ELEVATION. TOP 1.5" OF THE GUTTER FACE MUST BE A FORMED EDGE. PAR GUTTER SHALL NOT BE OVERLAID.
 - ⑧ SHOULD BE USED AT VERTICALLY CONSTRAINED AREAS WHEN AT A DRAINAGE HIGH POINT OR SUPER ELEVATED ROADWAY SEGMENTS.
 - ⑨ DRILL AND GROUT NO. 4 EPOXY-COATED 18" LONG TIE BARS AT 30" CENTER TO CENTER INTO EXISTING CONCRETE PAVEMENT 1' MINIMUM FROM ALL JOINTS.
 - ⑩ HELPS PROVIDE TWO SEPARATE RAMPS, REDUCES THE DOME SETBACK LENGTH AND MINIMIZES DIRECTIONAL CURB. THIS RADIUS DESIGN CLOSELY FOLLOWS THE TURNING VEHICLE PATH WHILE OPTIMIZING CURB RAMP LENGTH.
 - ⑪ CURB EXTENSIONS SHOULD BE USED IN VERTICALLY CONSTRAINED AREAS, USUALLY IN DOWNTOWN ROADWAY SEGMENTS WHERE ON-STREET PARKING IS AVAILABLE. CURB EXTENSIONS SHOULD BE CONSIDERED FOR APS INTERSECTIONS WHERE SPACE IS LIMITED. PUSH BUTTONS MUST MEET APS CRITERIA AS DESCRIBED IN THE PUSH BUTTON LOCATION DETAIL SHEET.


| | | | | | |
|--------------------|--|------------------------------|----------------------------------|----------------------------|--------------|
| LEAD EXPERT OFFICE | JEFFREY PERKINS OPERATIONS DIVISION | PEDESTRIAN CURB RAMP DETAILS | APPROVED: 11-04-2021 REVISED: | STANDARD PLAN 5-297.250 | 3 OF 6 |
| | | STANDARD PLAN | | STATE PROJ. NO. | SHEET NO. |
| | | | | TRUNK HWY. | TOTAL SHEETS |

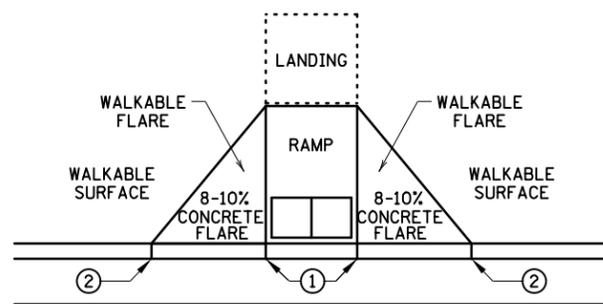


PAVED FLARES
ADJACENT TO WALKABLE SURFACE

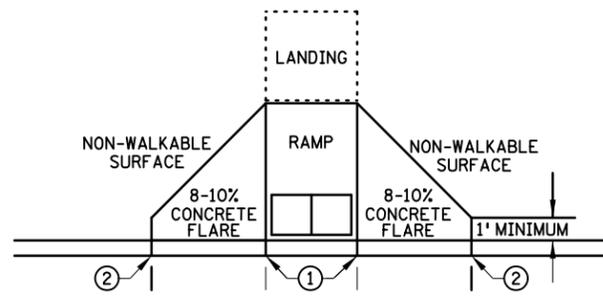

PAVED FLARES
ADJACENT TO NON-WALKABLE SURFACE

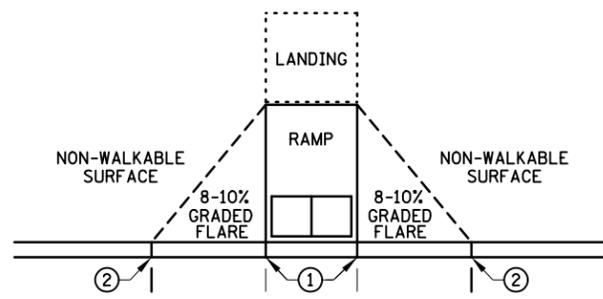


GRADED FLARES

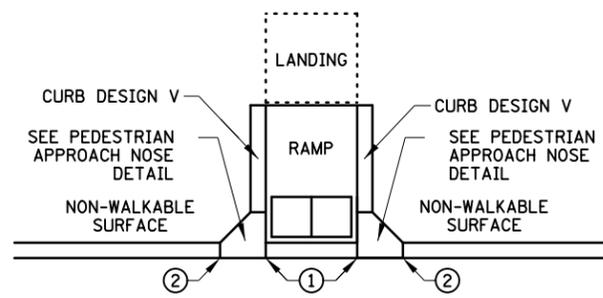


RETURNED CURB ④

TYPICAL SIDE TREATMENT OPTIONS ③ ⑩

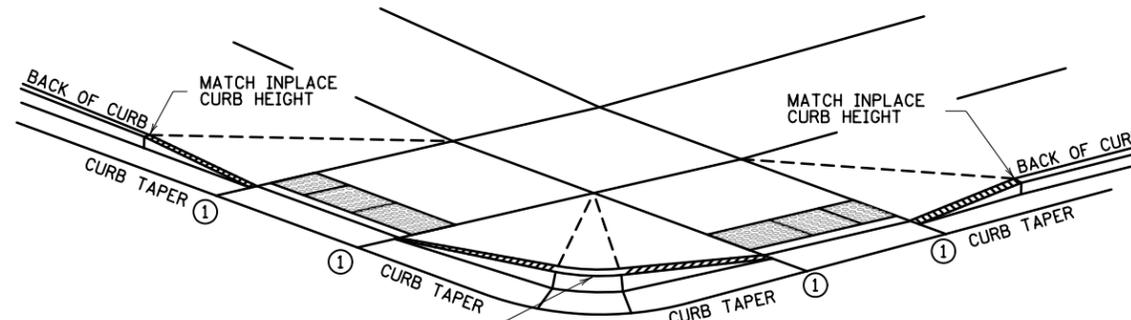


3" MINIMUM CURB HEIGHT, 4" PREFERRED
(MEASURED AT FRONT FACE OF CURB)
FOR A MIN. 6" LENGTH (MEASURED ALONG FLOW LINE)

DETECTABLE EDGE WITH
CURB AND GUTTER ⑦

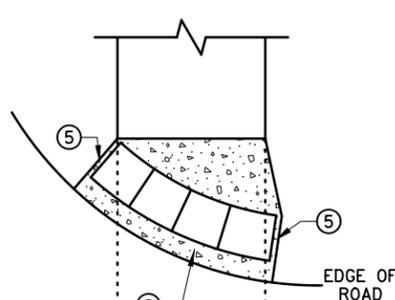


RADIALLY DETECTABLE WARNING




RECTANGULAR DETECTABLE WARNING


DETECTABLE EDGE WITHOUT CURB AND GUTTER

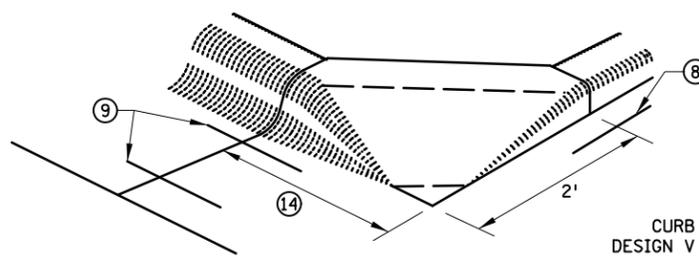


SECTION A-A

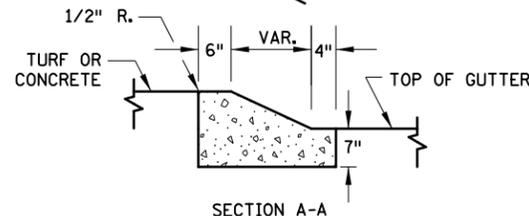

SECTION B-B

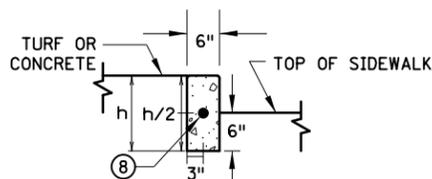

PEDESTRIAN APPROACH
NOSE DETAIL
(FOR RETURNED CURB
SIDE TREATMENT)

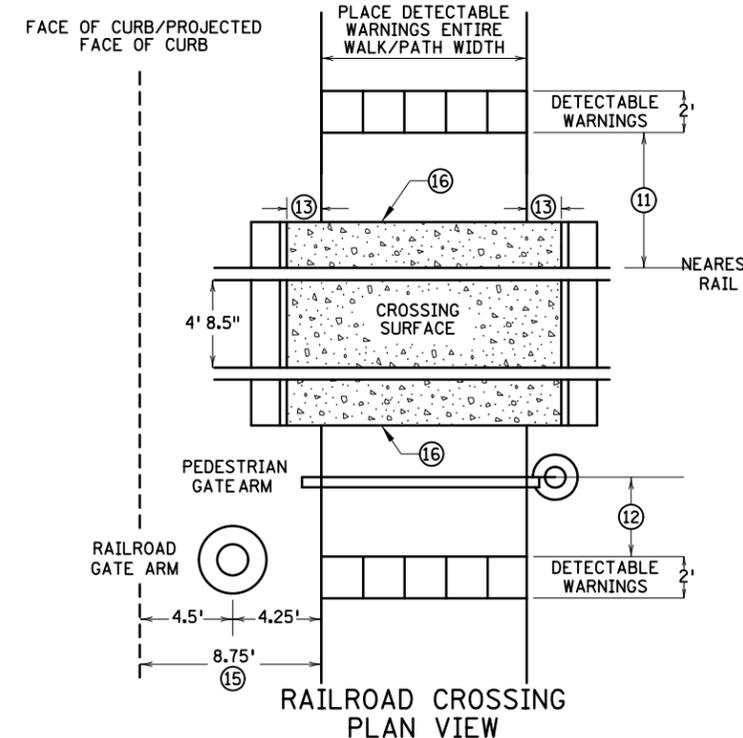


RAILROAD CROSSING
PLAN VIEW


NOTES:

- INTERMEDIATE CURB HEIGHTS TAPER SHALL RISE AT 8-10% TO A MINIMUM 3 INCH CURB HEIGHT. INCREASE CURB TAPER LENGTH AT LESS THAN 8% OR REDUCE INTERMEDIATE CURB HEIGHT TO 2+ INCHES IF NECESSARY TO MATCH ADJACENT BOULEVARD OR SIDEWALK GRADES.
- SEE STANDARD PLATE 7038 AND THIS SHEET FOR ADDITIONAL DETAILS ON DETECTABLE WARNING.
- A WALKABLE SURFACE IS DEFINED AS A PAVED SURFACE ADJACENT TO A CURB RAMP WITHOUT RAISED OBSTACLES THAT COULD MISTAKENLY BE TRAVERSED BY A USER WHO IS VISUALLY IMPAIRED.
- CONCRETE FLARE LENGTHS ADJACENT TO NON-WALKABLE SURFACES SHOULD BE LESS THAN 8' LONG MEASURED ALONG THE RAMPS FROM THE BACK OF CURB.
- ① 0" CURB HEIGHT. SEE INSET A ON SHEET 3 OF 6.
- ② FULL CURB HEIGHT.
- ③ SIDE TREATMENTS ARE APPLICABLE TO ALL RAMP TYPES AND SHOULD BE IMPLEMENTED AS NEEDED AS FIELD CONDITIONS DICTATE. THE ENGINEER SHALL DETERMINE THE RAMP SIDE TREATMENTS BASED ON MAINTENANCE OF BOTH ROADWAY AND SIDEWALK, ADJACENT PROPERTY CONSIDERATIONS, AND MITIGATING CONSTRUCTION IMPACTS.
- ④ TYPICALLY USED FOR MEDIANS AND ISLANDS.
- ⑤ WHEN NO CONCRETE FLARES ARE PROPOSED, THE CONCRETE WALK SHALL BE FORMED AND CONSTRUCTED PERPENDICULAR TO THE EDGE OF ROADWAY. MAINTAIN 3" MAX. BETWEEN EDGE OF DOMES AND EDGE OF CONCRETE.
- ⑥ IF NO CURB AND GUTTER IS PLACED IN RURAL SECTIONS, DETECTABLE WARNINGS SHALL BE PLACED 1' FROM THE EDGE OF BITUMINOUS ROADWAY AND/OR BITUMINOUS SHARED-USE PATH TO PROVIDE VISUAL CONTRAST.
- ⑦ ALL CONSTRUCTED CURBS MUST HAVE A CONTINUOUS DETECTABLE EDGE FOR THE VISUALLY IMPAIRED. THIS DETECTABLE EDGE REQUIRES DETECTABLE WARNINGS WHEREVER THERE IS ZERO-INCH HIGH CURB. CURB TAPERS ARE CONSIDERED A DETECTABLE EDGE WHEN THE TAPER STARTS WITHIN 3" OF THE EDGE OF THE DETECTABLE WARNINGS, AND UNIFORMLY RISES TO A 3-INCH MINIMUM CURB HEIGHT. ANY CURB NOT PART OF A CURB TAPER AND LESS THAN 3 INCHES IN HEIGHT IS NOT CONSIDERED A DETECTABLE EDGE AND THEREFORE IS NOT COMPLIANT WITH ACCESSIBILITY STANDARDS.
- ⑧ DRILL AND GROUT 1 - NO. 4 12" LONG REINFORCEMENT BAR (EPOXY COATED) WITH 3" MIN. COVER. REINFORCEMENT BARS ARE NOT NEEDED IF THE APPROACH NOSE IS POURED INTEGRAL WITH THE V CURB.
- ⑨ DRILL AND GROUT 2 - NO. 4 12" LONG REINFORCEMENT BARS (EPOXY COATED) WITH 3" MIN. COVER. REINFORCEMENT BARS ARE NOT NEEDED IF THE APPROACH NOSE IS POURED INTEGRAL WITH THE CURB AND GUTTER.
- ⑩ SIDE TREATMENT EXAMPLES SHOWN ARE WHEN THE INITIAL LANDING IS APPROXIMATELY LEVEL WITH THE FULL HEIGHT CURB (I.E. 6' LONG RAMP FOR 6" HIGH CURB). WHEN THE INITIAL LANDING IS MORE THAN 1" BELOW FULL HEIGHT CURB REFER TO SHEETS 1 & 2 TO MODIFY THE CURB HEIGHT TAPERS AND MAINTAIN POSITIVE BOULEVARD DRAINAGE. CONSTRUCT THESE TAPERS AT 0"-3" AT 8-10%, THEN LESS THAN 5% FROM 3" CURB TO FULL CURB HEIGHT.
- ⑪ NEAREST EDGE OF DETECTABLE WARNING SURFACES SHALL BE PLACED 12' MINIMUM TO 15' MAXIMUM FROM THE NEAREST RAIL. FOR SKEWED RAILWAYS IN NO INSTANCE SHALL THE DETECTABLE WARNING BE CLOSER THAN 12' MEASURED PERPENDICULAR TO THE NEAREST RAIL.
- ⑫ WHEN PEDESTRIAN GATES ARE PROVIDED, DETECTABLE WARNING SURFACES SHALL BE PLACED ON THE SIDE OF THE GATES OPPOSITE THE RAIL, 2' FROM THE APPROACHING SIDE OF THE GATE ARM. THIS CRITERIA GOVERNS OVER NOTE ⑪.
- ⑬ CROSSING SURFACE SHALL EXTEND 2' MINIMUM PAST THE OUTSIDE EDGE OF WALK OR SHARED-USE PATH.
- ⑭ 3' FOR MEDIANS AND SPLITTER ISLANDS. NOSE CAN BE REDUCED TO 2' ON FREE RIGHT ISLANDS.
- ⑮ SIDEWALK TO BE PLACED 8.75' MIN. FROM THE FACE OF CURB/PROJECTED FACE OF CURB. THIS ENSURES MIN. CLEARANCE BETWEEN THE SIDEWALK AND GATE ARM COUNTERWEIGHT SUPPORTS.
- ⑯ CONSTRUCT WITH EXPANSION MATERIAL PER MNDOT SPECIFICATION 3702 TYPES A-E. EXPANSION MATERIAL SHALL MATCH FULL HEIGHT OF ADJACENT CONCRETE.


| | | | | | | |
|--------------------|--|------------------------------|----------------------------------|---|----------------------------|-----------|
| LEAD EXPERT OFFICE | JEFFREY PERKINS OPERATIONS DIVISION | PEDESTRIAN CURB RAMP DETAILS | APPROVED: 11-04-2021 REVISED: | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.250 | 4 OF 6 |
| | DEPARTMENT OF TRANSPORTATION | | STANDARD PLAN | | STATE PROJ. NO. | SHEET NO. |
| | | | | TRUNK HWY. | TOTAL SHEETS | |

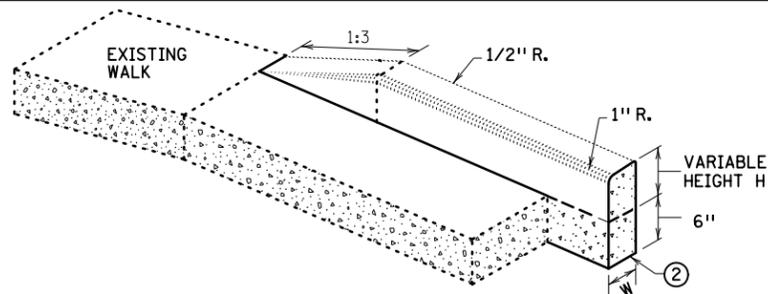


V CURB ADJACENT TO LANDSCAPE
CURB WITHIN SIDEWALK LIMITS

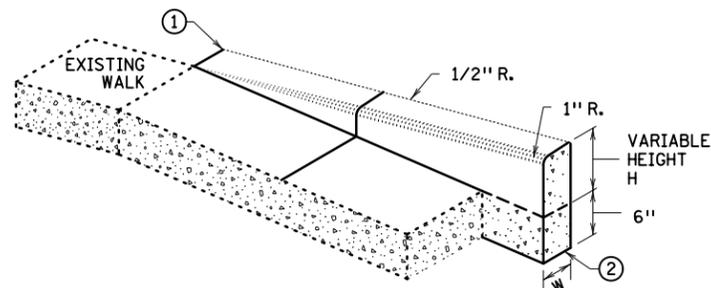

V CURB ADJACENT TO LANDSCAPE
CURB OUTSIDE SIDEWALK LIMITS

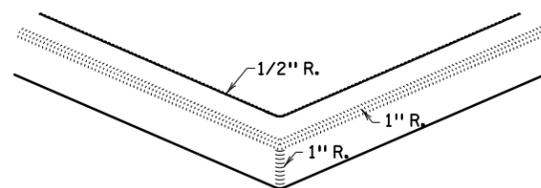


V CURB INTERSECTION

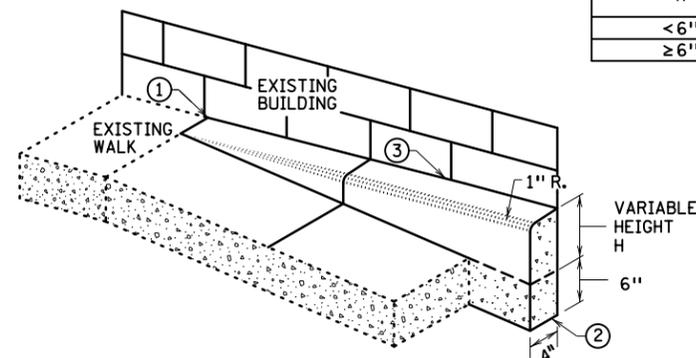


V CURB ADJACENT TO BUILDING
OR BARRIER


| CONCRETE CURB DESIGN V | |
|------------------------|-----------------|
| CURB HEIGHT H | CURB WIDTH W |
| < 6" | 4" |
| ≥ 6" | 6" |

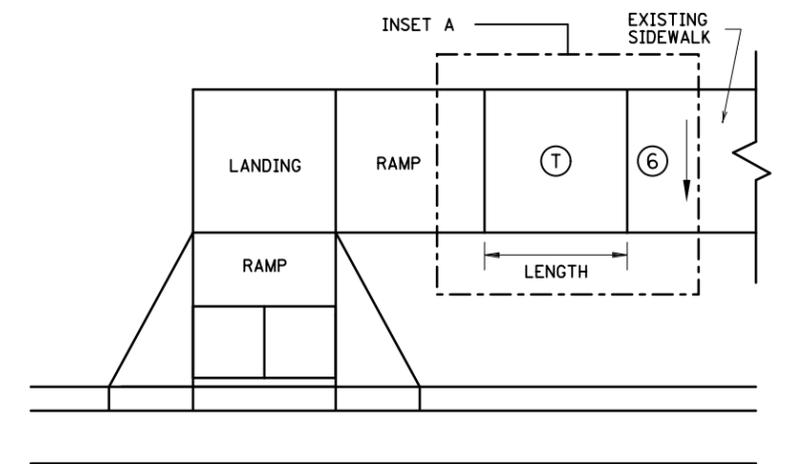


TRANSITION PANEL ④ ⑤

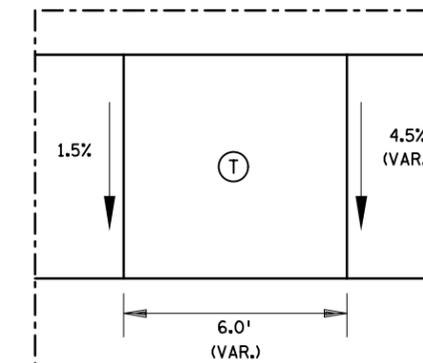


INSET A

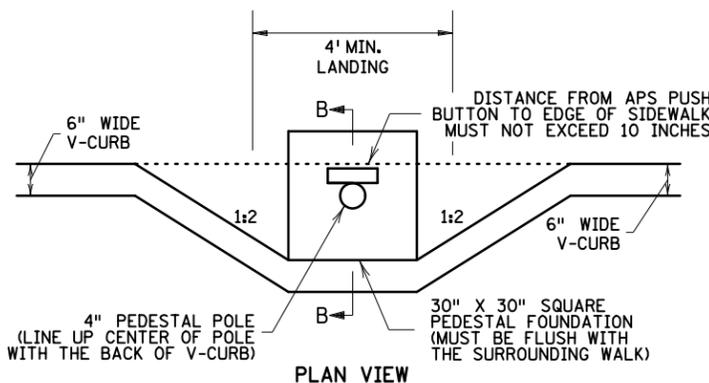


PLAN VIEW

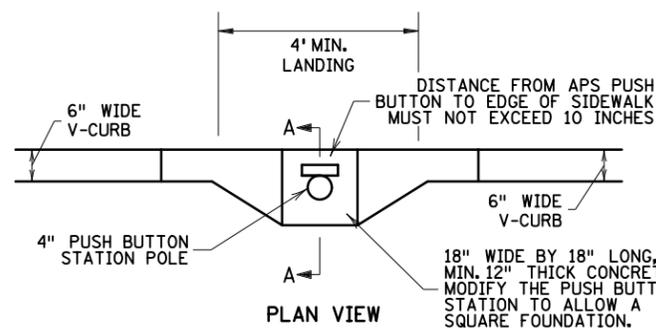

PLAN VIEW

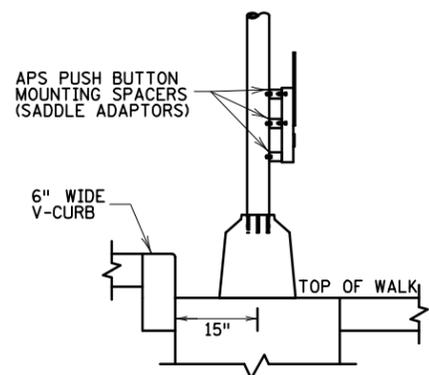

SECTION B-B
SIGNAL PEDESTAL & PUSH BUTTON (V-CURB)

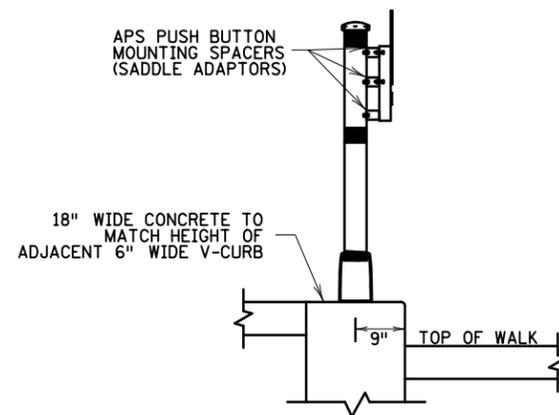

SECTION A-A
PUSH BUTTON STATION (V-CURB)

NOTES:

A WALKABLE FLARE IS AN 8-10% CONCRETE FLARE THAT IS REQUIRED WHEN THE FLARE IS ADJACENT TO A WALKABLE SURFACE, OR WHEN THE PEDESTRIAN PATH OF TRAVEL OF A PUSH BUTTON TRAVERSES THE FLARE.

ALL V CURB CONTRACTION JOINTS SHALL MATCH CONCRETE WALK JOINTS.

WHERE RIGHT-OF-WAY ALLOWS, USE OF V CURB SHOULD BE MINIMIZED. GRADING ADJACENT TURF OR SLOPING ADJACENT PAVEMENT IS PREFERRED.

V CURB SHALL BE PLACED OUTSIDE THE SIDEWALK LIMITS WHEN RIGHT OF WAY ALLOWS.

V CURB NEXT TO BUILDING SHALL BE A 4" WIDTH AND SHALL MATCH PREVIOUS TOP OF SIDEWALK ELEVATIONS.

- ① END TAPERS AT TRANSITION SECTION SHALL MATCH INPLACE SIDEWALK GRADES.
- ② ALL V CURB SHALL MATCH BOTTOM OF ADJACENT WALK.
- ③ CONSTRUCT USING APPROVED EXPANSION MATERIAL PER MNDOT TYPE A-E EXPANSION. LEAVE A MINIMUM 1/2" TOP GAP AND SEAL WITH MNDOT APPROVED SILICONE PER MNDOT SPEC 3722.
- ④ THE MAX. RATE OF CROSS SLOPE TRANSITIONING IS 1' LINEAR FOOT OF SIDEWALK PER HALF PERCENT CROSS SLOPE. WHEN PAR WIDTH IS GREATER THAN 6' OR THE RUNNING SLOPE IS GREATER THAN 5%, DOUBLE THE CALCULATED TRANSITION LENGTH.
- ⑤ TRANSITION PANELS ARE TO ONLY BE USED AFTER THE RAMP, OR IF NEEDED, LANDING ARE AT THE FULL CURB HEIGHT (TYPICAL SECTION).
- ⑥ EXISTING CROSS SLOPE GREATER THAN 2.0%.

LEGEND

- THESE LONGITUDINAL SLOPE RANGES SHALL BE THE STARTING POINT. IF SITE CONDITIONS WARRANT, LONGITUDINAL SLOPES UP TO 8.3% OR FLATTER ARE ALLOWED.
- ⑤ INDICATES PEDESTRIAN RAMP - SLOPE SHALL BE BETWEEN 5.0% MINIMUM AND 8.3% MAXIMUM IN THE DIRECTION SHOWN AND THE CROSS SLOPE SHALL NOT EXCEED 2.0%.
 - ▨ LANDING AREA - 4' X 4' MIN. (5' X 5' MIN. PREFERRED) DIMENSIONS AND MAX 2.0% SLOPE IN ALL DIRECTIONS. LANDING SHALL BE FULL WIDTH OF INCOMING PARS.
 - ① TRANSITION PANEL(S) - TO BE USED FOR TRANSITIONING THE CROSS-SLOPE OF A RAMP TO THE EXISTING WALK CROSS-SLOPE. RATE OF TRANSITION SHOULD BE 0.5% PER 1 LINEAR FOOT OF WALK. SEE THIS SHEET FOR ADDITIONAL INFORMATION.

LEAD EXPERT OFFICE
JEFFREY PERKINS
OPERATIONS DIVISION

PEDESTRIAN CURB RAMP DETAILS

APPROVED: 11-04-2021
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.250


5 OF 6




STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.


SHEET NO.
TOTAL SHEETS

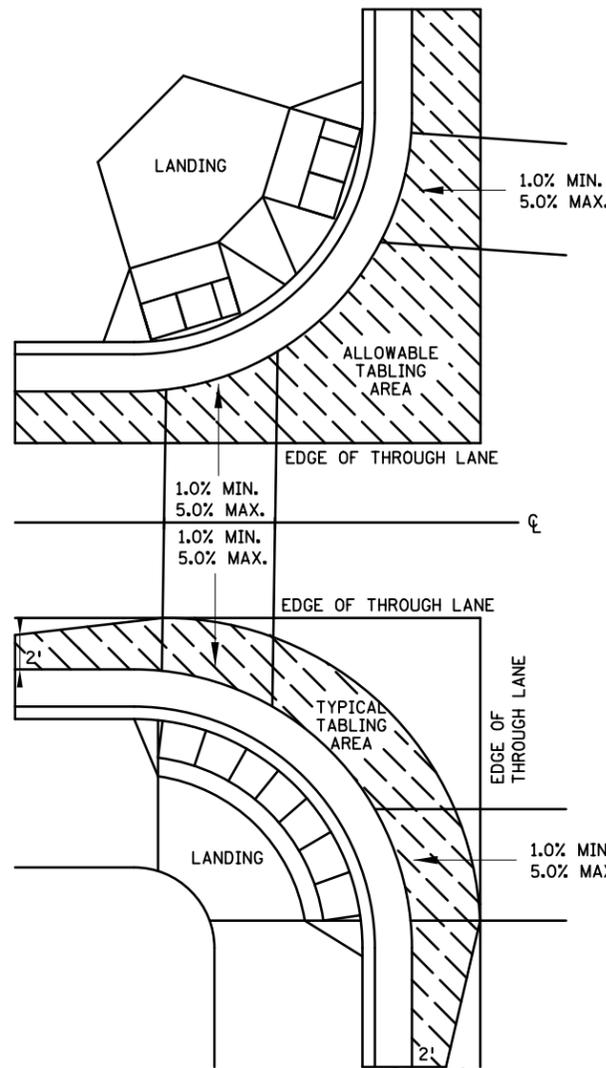


CURB LINE AND ROAD CROSSING ADJUSTMENTS

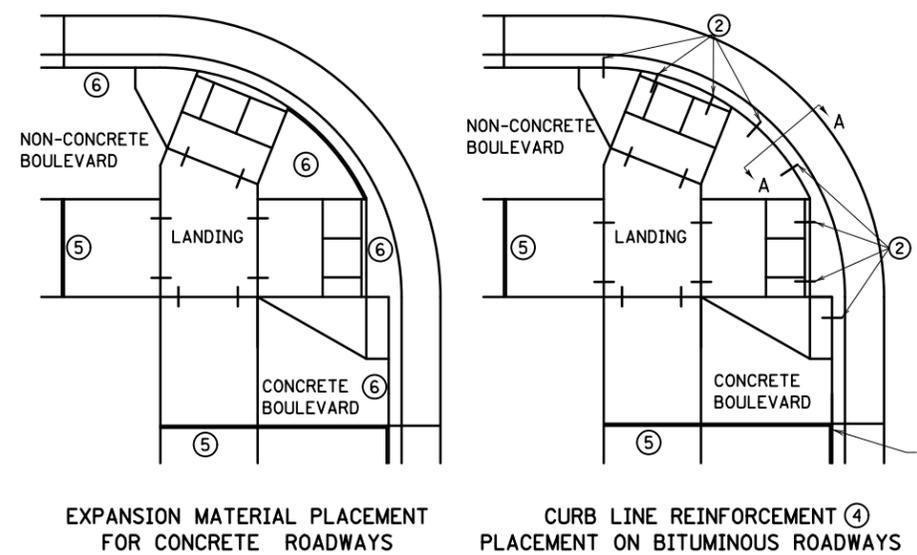


EXPANSION MATERIAL PLACEMENT FOR CONCRETE ROADWAYS CURB LINE REINFORCEMENT PLACEMENT ON BITUMINOUS ROADWAYS

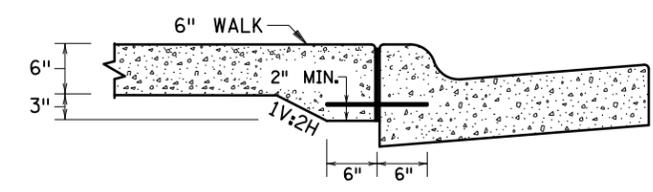


SECTION VIEW A-A THICKENED SECTION THROUGH CURB RAMP FLARES

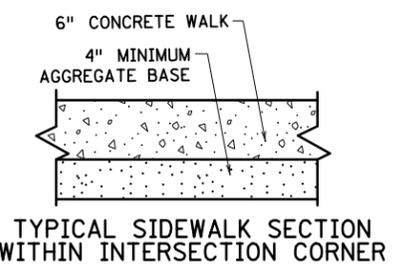


TYPICAL SIDEWALK SECTION WITHIN INTERSECTION CORNER

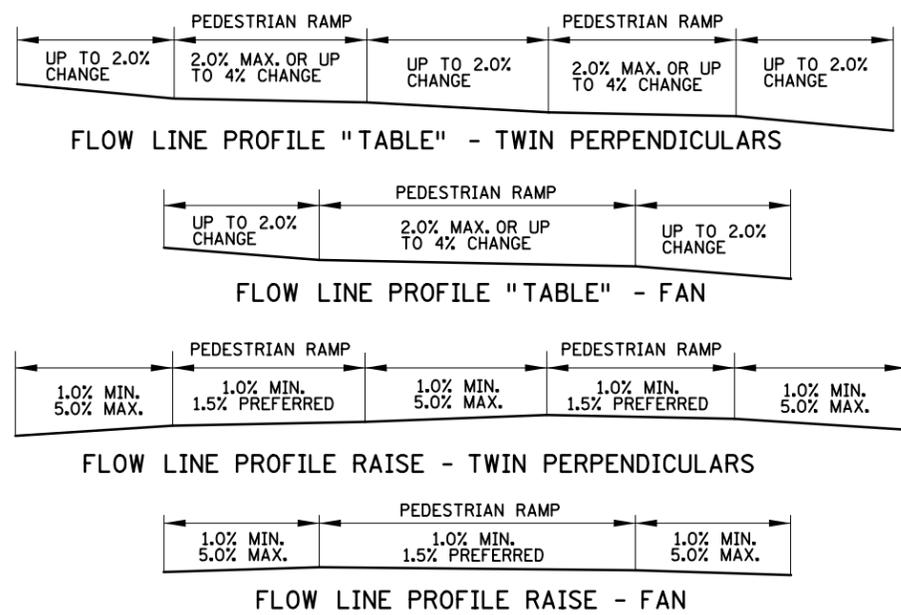


FLOW LINE PROFILE "TABLE" - TWIN PERPENDICULARS
 FLOW LINE PROFILE "TABLE" - FAN
 FLOW LINE PROFILE RAISE - TWIN PERPENDICULARS
 FLOW LINE PROFILE RAISE - FAN

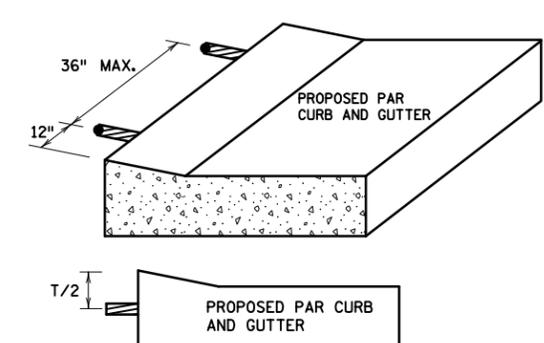


CURB RAMP REINFORCEMENT DETAILS

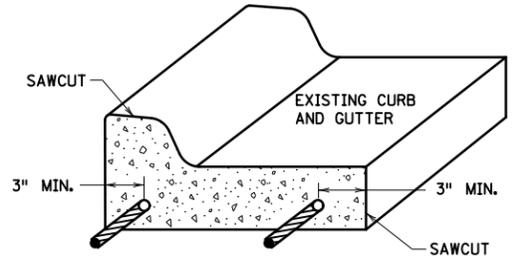

CURB AND GUTTER REINFORCEMENT

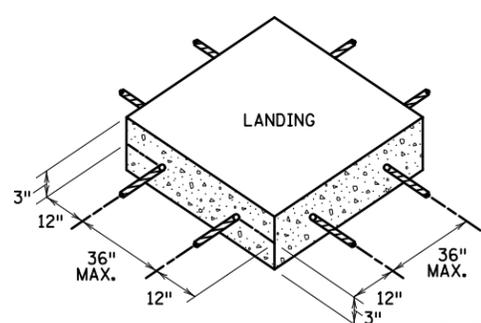

SEPARATE LANDING POUR REINFORCEMENT

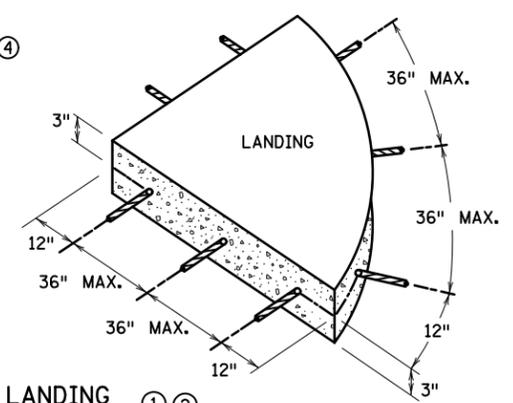

GENERAL NOTES:

"TABLING" OF CROSSWALKS MEANS MAINTAINING LESS THAN 2% CROSS SLOPE WITHIN A CROSSWALK, IS REQUIRED WHEN A ROADWAY IS IN A STOP OR YIELD CONDITION AND THE PROJECT SCOPE ALLOWS.

RECONSTRUCTION PROJECTS: ON FULL PAVEMENT REPLACEMENT PROJECTS "TABLING" OF ENTIRE CROSSWALK SHALL OCCUR WHEN FEASIBLE.

MILL & OVERLAY PROJECTS: "TABLING" OF FLOW LINES, IN FRONT OF THE PEDESTRIAN RAMP, IS REQUIRED WHEN THE EXISTING FLOW LINE IS GREATER THAN 2%. WARPING OF THE BITUMINOUS PAVEMENT CAN NOT EXTEND INTO THE THROUGH LANE. TABLE THE FLOW LINE TO 2% OR AS MUCH AS POSSIBLE WHILE ADHERING TO THE FOLLOWING CRITERIA:

- 1) 1.0% MIN. CROSS-SLOPE OF THE ROAD
- 2) 5.0% MAX. CROSS-SLOPE OF THE ROAD
- 3) "TABLE" FLOW LINE UP TO 4% CHANGE FROM EXISTING SLOPE IN FRONT OF PEDESTRIAN RAMP
- 4) UP TO 2% CHANGE IN FLOW LINE FROM EXISTING SLOPE BEYOND THE PEDESTRIAN CURB RAMP

STAND-ALONE ADA RETROFITS: FOLLOW MILL & OVERLAY CRITERIA ABOVE HOWEVER ALL PAVEMENT WARPING IS DONE WITH BITUMINOUS PATCHING ON BITUMINOUS ROADWAYS AND FULL-DEPTH APRON REPLACEMENT ON CONCRETE ROADWAYS.

RAISING OF CURB LINES SHOULD OCCUR IN VERTICALLY CONSTRAINED AREAS. RAISE THE CURB LINES ENOUGH TO ALLOW COMPLIANT RAMPS OR AS MUCH AS POSSIBLE WHILE ADHERING TO THE FOLLOWING CRITERIA:


- 1) 1.0% MIN. AND 5.0% MAXIMUM CROSS-SLOPE OF THE ROAD
- 2) 1.0% MIN. FLOW LINE (ON EITHER SIDE OF PEDESTRIAN RAMP) TO MAINTAIN POSITIVE DRAINAGE
- 3) 5.0% RECOMMENDED MAX. FLOW LINE
- 4) LONGITUDINAL THROUGH LANE ROADWAY TAPERS SHOULD BE 1" VERTICAL PER 15' HORIZONTAL

NOTES:


- 1) TO ENSURE RAMPS AND LANDINGS ARE PROPERLY CONSTRUCTED, ALL INITIAL LANDINGS AT A TOP OF A RAMPED SURFACE (RUNNING SLOPE GREATER THAN 2%) SHALL BE FORMED AND PLACED SEPARATELY IN AN INDEPENDENT CONCRETE POUR. FOLLOW SIDEWALK REINFORCEMENT DETAILS ON THIS SHEET FOR ALL SEPARATELY POURED INITIAL LANDINGS.
- 2) DRILL AND GROUT NO. 4 12" LONG REINFORCEMENT BARS (EPOXY COATED) AT 36" MAXIMUM CENTER TO CENTER MINIMUM 12" SPACING FROM CONSTRUCTION JOINTS. BARS TO BE ADJUSTED TO MATCH RAMP GRADE. BARS TO BE PAID BY EACH.
- 3) DRILL AND GROUT 2 - NO. 4 X 12" LONG (6" EMBEDDED) REINFORCEMENT BARS (EPOXY COATED). REINFORCEMENT REQUIRED FOR ALL CONSTRUCTION JOINTS. BARS TO BE PAID BY EACH.
- 4) THIS CURB LINE REINFORCEMENT DETAIL SHALL BE USED ON BITUMINOUS ROADWAYS. FOR CONCRETE ROADWAYS, SEE NOTE 6.
- 5) CONSTRUCT WITH EXPANSION MATERIAL PER MNDOT SPECIFICATION 3702 TYPES A-E. EXPANSION MATERIAL SHALL MATCH FULL HEIGHT OF ADJACENT CONCRETE.
- 6) USE AN APPROVED TYPE F (1/4 INCH THICK) SEPARATION MATERIAL. SEPARATION MATERIAL SHALL MATCH FULL HEIGHT DIMENSION OF ADJACENT CONCRETE.

| | | | | | | |
|--------------------|--|------------------------------|----------------------------------|---|----------------------------|--------|
| LEAD EXPERT OFFICE | JEFFREY PERKINS OPERATIONS DIVISION | PEDESTRIAN CURB RAMP DETAILS | APPROVED: 11-04-2021 REVISED: | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.250 | 6 OF 6 |
|--------------------|--|------------------------------|----------------------------------|---|----------------------------|--------|


| | | | | | |
|--|--|---------------|--|-----------------|--------------|
| | | STANDARD PLAN | | STATE PROJ. NO. | SHEET NO. |
| | | | | TRUNK HWY. | TOTAL SHEETS |

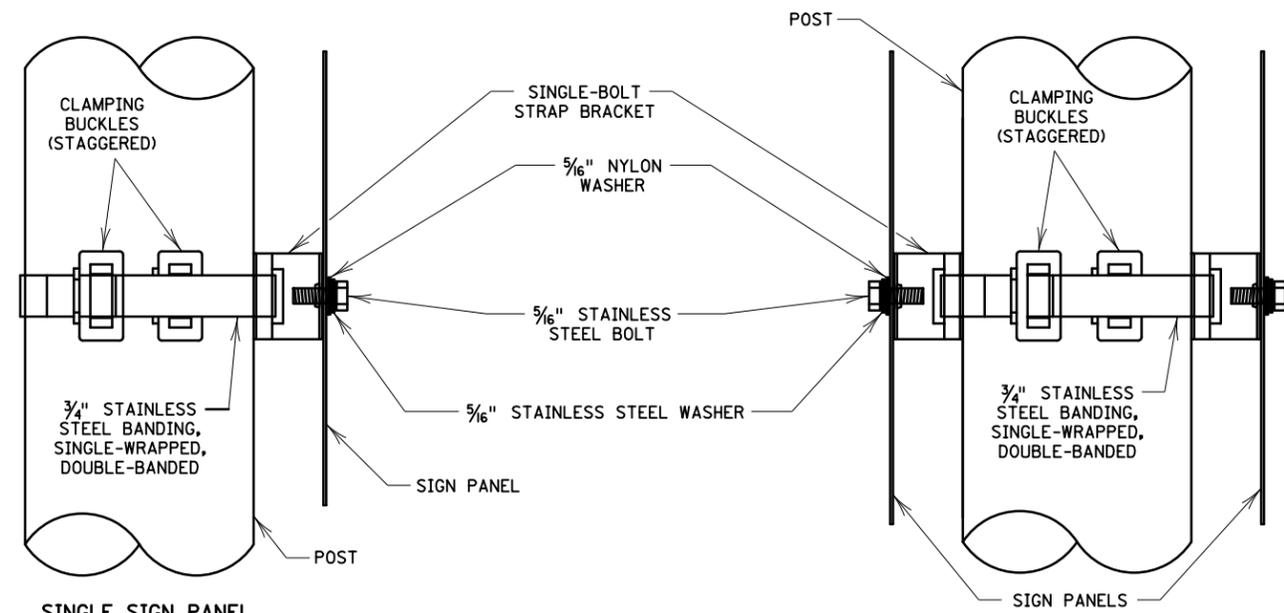


NON-STIFFENER MOUNTING DETAILS
FOR SIGN PANELS UP TO 24" WIDE AND OVERHEAD SIGN IDENTIFICATION PLATES

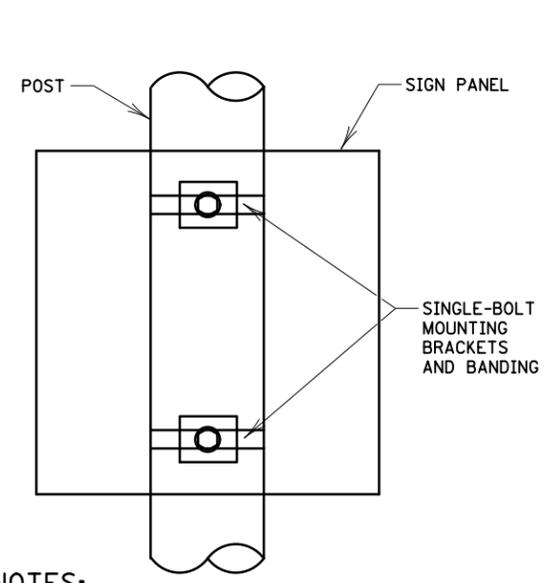




NOTES:
TENSION THE BANDING IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION REQUIREMENTS.
DO NOT MOUNT SIGNS ON BREAKAWAY TRAFFIC SIGNALS AND LUMINAIRE SUPPORTS.

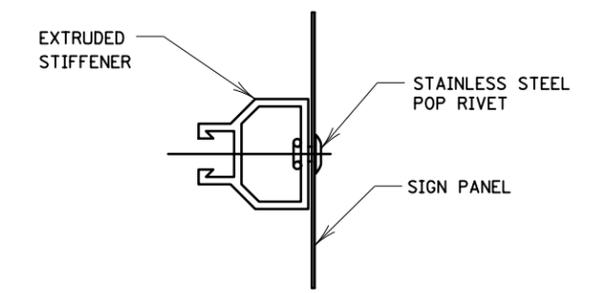

ATTACH 3/16" RIVETS AT 6" INTERVALS. ATTACH END RIVETS 3" FROM SIGN EDGE. USE 1/4" RIVETS FOR THE END RIVETS.
RIVET ATTACHMENT

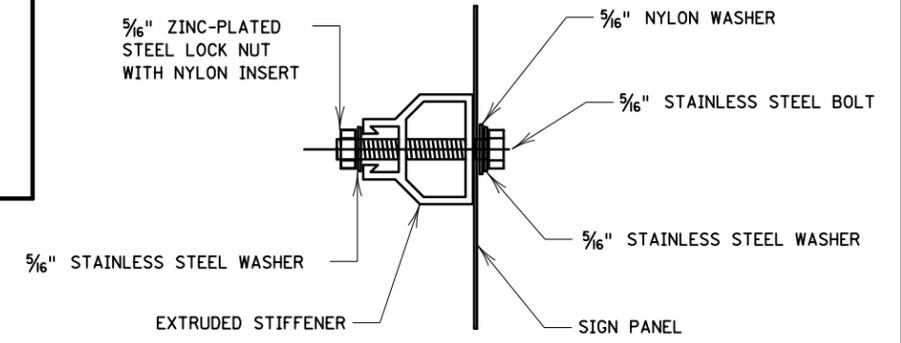

ATTACH AT STANDARD PUNCH CODE LOCATIONS
BOLT ATTACHMENT

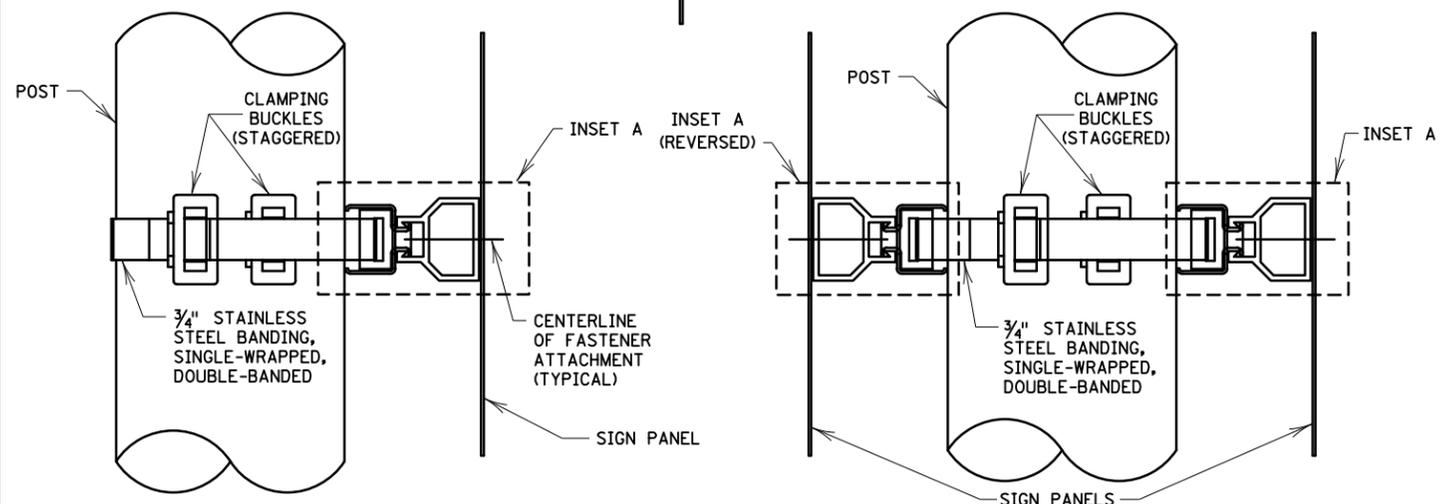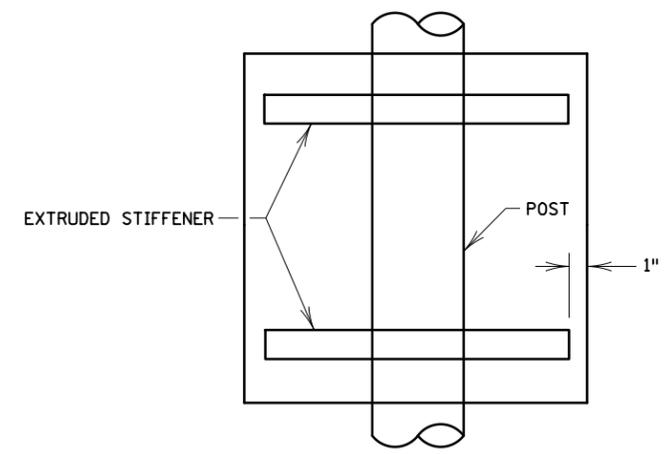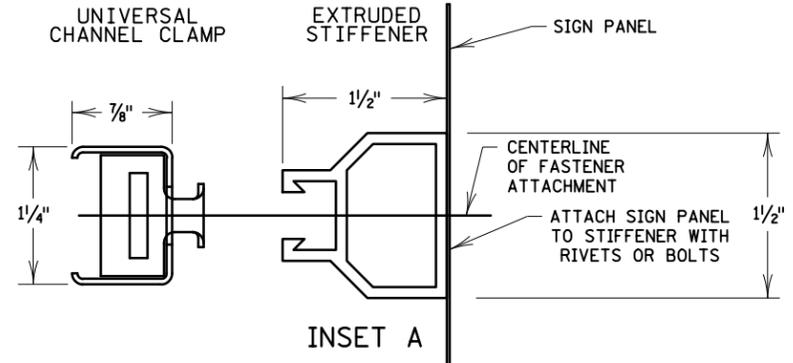

STIFFENER MOUNTING DETAILS
FOR SIGN PANELS 30" WIDE AND LARGER

| | | PANEL WIDTH | | | | |
|--------------|----|-------------|----|----|----|----|
| | | 2' | 3' | 4' | 5' | 6' |
| PANEL HEIGHT | 2' | 2 | 2 | 2 | 2 | 3 |
| | 3' | 2 | 2 | 2 | 2 | 3 |
| | 4' | 2 | 2 | 2 | 2 | 3 |
| | 5' | 3 | 3 | 3 | 3 | 3 |
| | 6' | 3 | 3 | 3 | 4 | 4 |
| 7' | 3 | 3 | 3 | 4 | 4 | |

PROVIDE VERTICAL SPACING OF NO MORE THAN 36" BETWEEN STIFFENERS.
PROVIDE A VERTICAL DISTANCE OF NO MORE THAN 12" FROM PANEL EDGE TO STIFFENER.

NOTES:

SPACE STIFFENERS IN ACCORDANCE WITH THE PUNCH CODES SHOWN IN THE MNDOT STANDARD SIGNS AND MARKINGS MANUAL.
ATTACH STIFFENERS TO SIGN PANELS USING FASTENERS. PLACE STIFFENERS AT THE VERTICAL LOCATIONS OF THE MOUNTING HOLES FOR EACH SIGN.
FURNISH AND INSTALL HARDWARE COMPATIBLE WITH STIFFENER MOUNTING SYSTEMS.
FURNISH TWO TYPE 201 STAINLESS STEEL 3/4" WIDE BY 1/32" THICK STRAPS, EACH WITH CLAMPING BUCKLES AND INSTALL SEPARATELY WITH A SINGLE WRAP AROUND THE MAST ARM CHORD. PLACE THE SECOND BANDING STRAP OVER THE FIRST STRAP AND STAGGER THE CLAMPING BUCKLES SO THE BUCKLES ARE NOT DIRECTLY OVER ONE ANOTHER.

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

SIGN MOUNTING SYSTEMS FOR ROUND SUPPORTS

APPROVED: 10-16-2019
REVISED:

Peter A. Harff
PETER A. HARFF
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.730


1 OF 1



STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

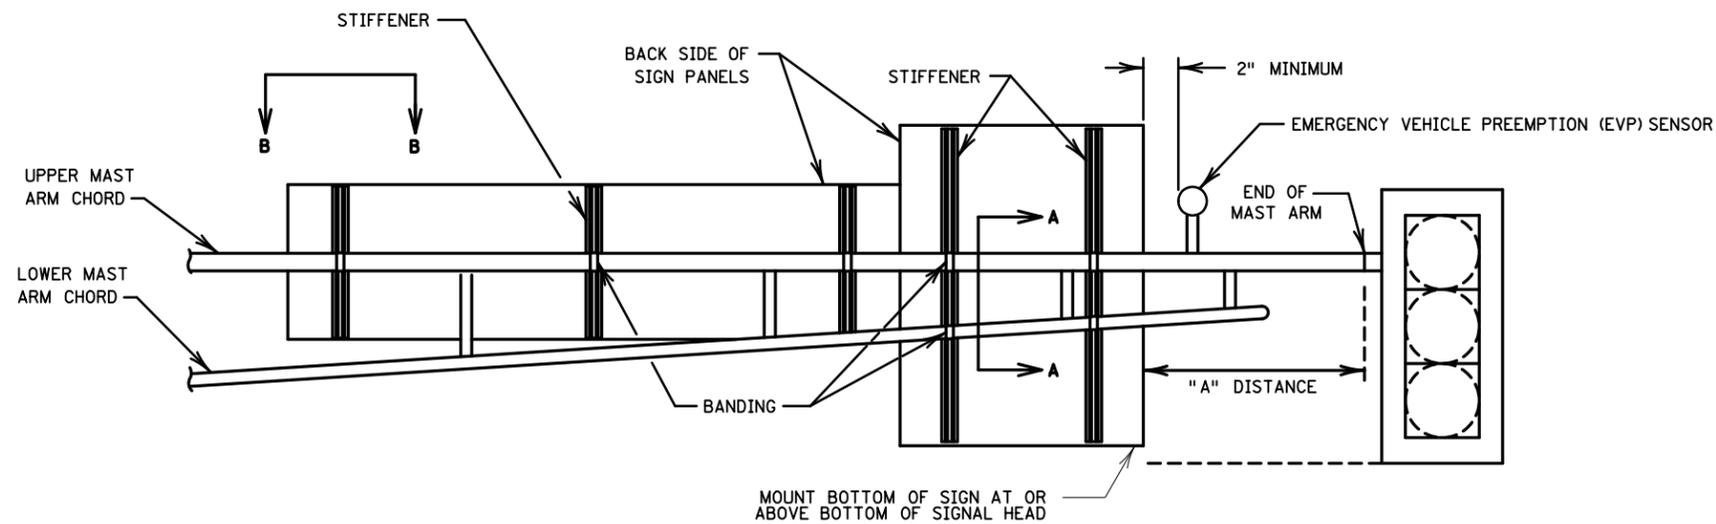

MAST ARM SIGN MOUNTING

| | | NUMBER OF EXTRUDED STIFFENERS REQUIRED* | | | | | | | | | | | | | |
|--------------|----|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| | | PANEL WIDTH | | | | | | | | | | | | | |
| PANEL HEIGHT | 2' | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 4 | 5 | 5 | 5 | 5 | |
| | 3' | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 5 | 5 | 5 | 5 | 5 | |
| | 4' | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 5 | 5 | 5 | 5 | 6 | |
| | 5' | 2 | 2 | 2 | 3 | 4 | 4 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | |
| | 6' | | | 2 | 3 | 4 | 4 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | |
| 7' | | | | 4 | 4 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | | |

* WHERE SIGN PANEL DIMENSIONS FALL BETWEEN 1' INCREMENTS, USE NEXT HIGHER WIDTH AND/OR HEIGHT DIMENSION.

NOTES:

FURNISH AND INSTALL AT LEAST ONE SPACER FOR EACH SIGN PANEL WHEN PANELS ARE ATTACHED TO THE LOWER MAST ARM CHORD.

AFFIX SIGNS TO UPPER AND LOWER MAST ARM CHORDS WHEN POSSIBLE.

POSITION BOTTOM OF SIGN PANEL AT LEAST 17' ABOVE ROADWAY.

MOUNT SIGN PANELS PLUMB AND SHIM WITH REQUIRED SPACERS AS SHOWN.

PROVIDE SPACING BETWEEN STIFFENERS OF NO MORE THAN 36".


PROVIDE A HORIZONTAL DISTANCE OF NO MORE THAN 12" FROM PANEL EDGE TO STIFFENER.

PROVIDE A VERTICAL DISTANCE OF NO MORE THAN 1" FROM PANEL EDGE TO STIFFENER.


FURNISH AND INSTALL 1/4" STAINLESS STEEL RIVETS 3" FROM THE PANEL EDGE TO ATTACH THE STIFFENERS TO THE SIGN PANELS. FURNISH AND INSTALL 3/16" STAINLESS STEEL RIVETS AT 6" ON CENTER TO ATTACH THE REMAINDER OF THE STIFFENER TO THE SIGN PANEL.

FURNISH TWO TYPE 201 STAINLESS STEEL 3/4" WIDE BY 1/32" THICK STRAPS, EACH WITH CLAMPING BUCKLES AND INSTALL SEPARATELY WITH A SINGLE WRAP AROUND THE MAST ARM CHORD. PLACE THE SECOND BANDING STRAP OVER THE FIRST STRAP AND STAGGER THE CLAMPING BUCKLES SO THE BUCKLES ARE NOT DIRECTLY OVER ONE ANOTHER.


THE "A" DISTANCE IS SHOWN ON THE PLANS. IT IS THE DISTANCE FROM THE END OF THE MAST ARM TO THE EDGE OF EACH SIGN.

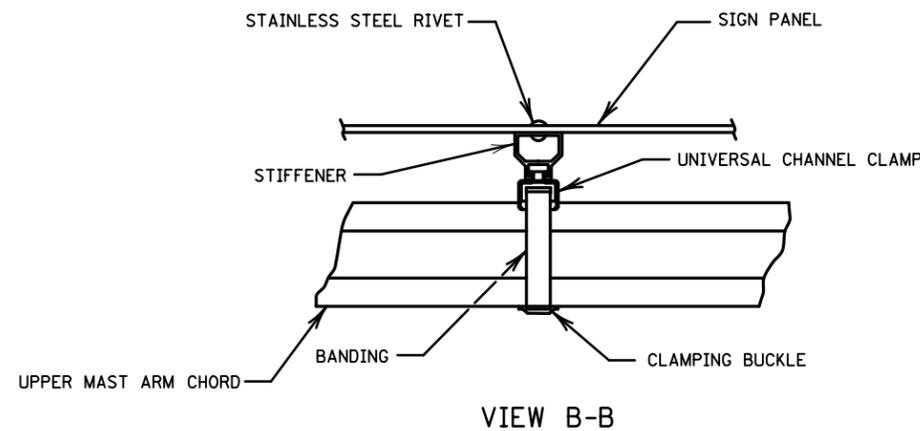

VIEW B-B

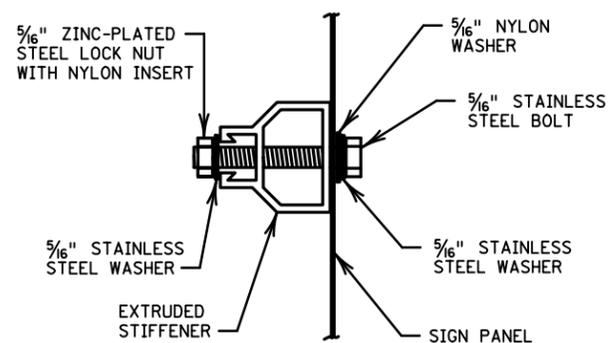


BOLT ATTACHMENT
ATTACH AT STANDARD PUNCH CODE LOCATIONS

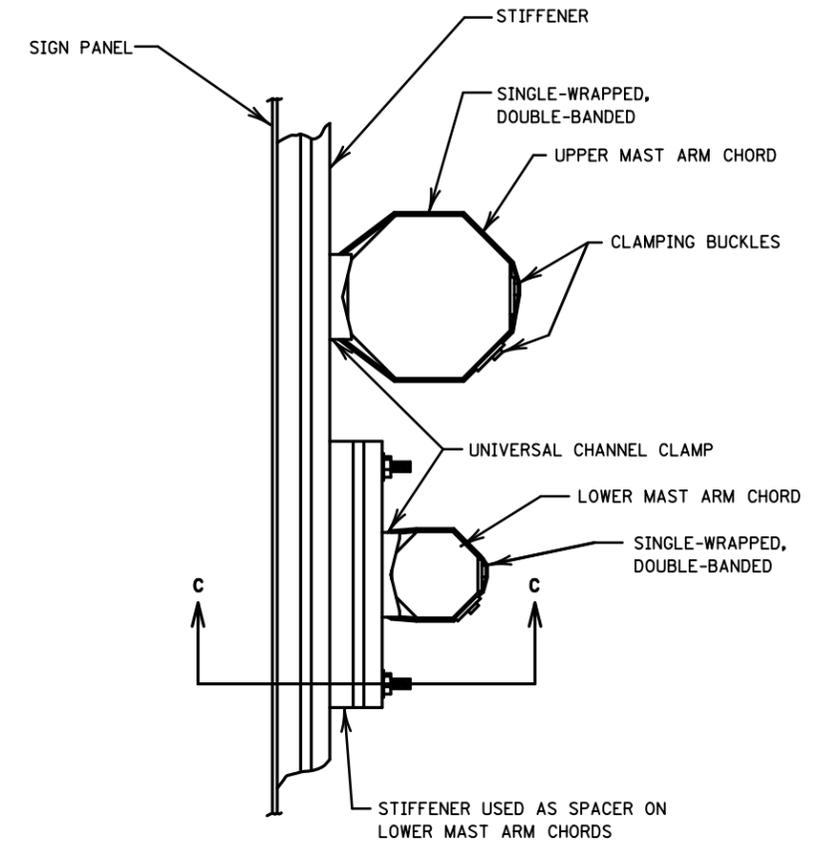

VIEW A-A ①

① SIGN PANELS TALLER THAN 36" MUST BE BANDED TO THE LOWER MAST ARM CHORD AT A MINIMUM OF ONE LOCATION. SIGN PANEL SHALL BE BANDED TO THE LOWER MAST ARM AT A LOCATION THAT WILL PROVIDE THE CLOSEST TO PLUMB ALIGNMENT FOR THE SIGN PANEL.

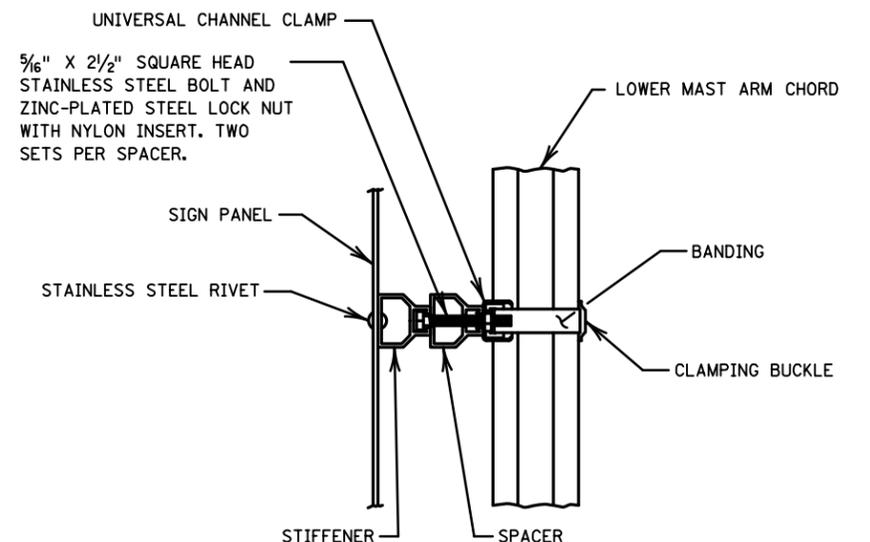

VIEW C-C

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING



SIGN MOUNTING DETAILS FOR SIGNAL MAST ARMS

APPROVED: 10-16-2019
REVISED: 04-17-2020

Peter A Harff
PETER A. HARFF
STATE DESIGN ENGINEER


STANDARD PLAN
5-297.731

1 OF 1

STANDARD PLAN


STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

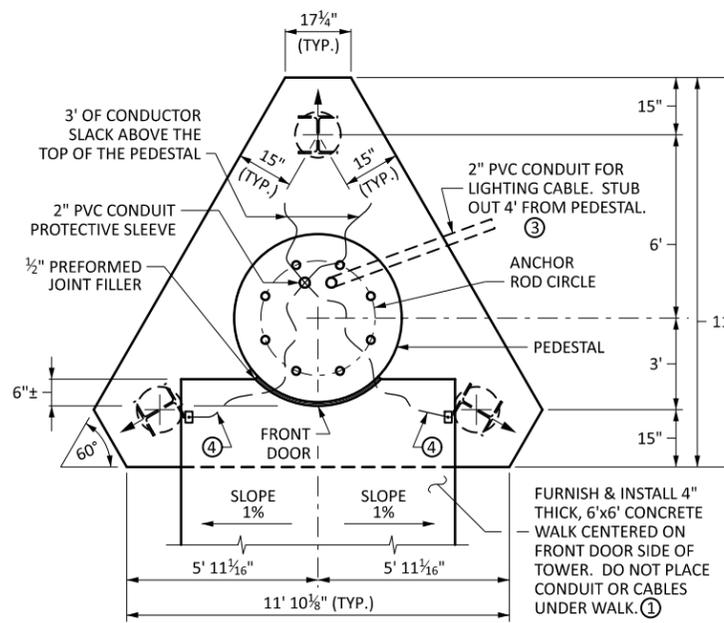


PLAN VIEW

FURNISH & INSTALL 4\"/>

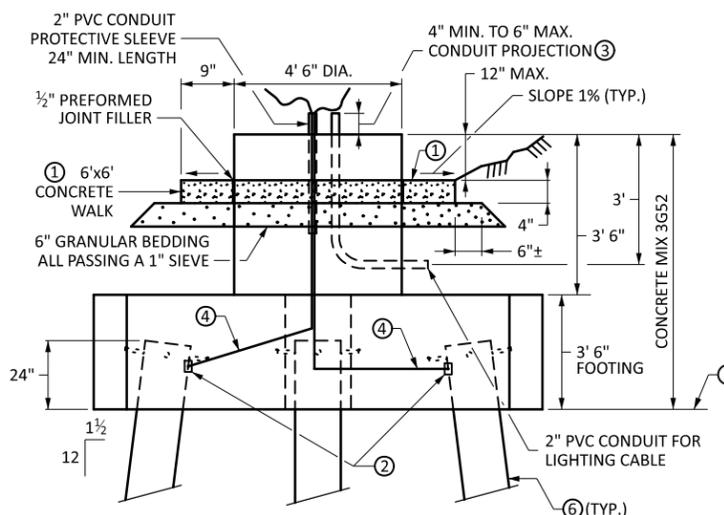


ELEVATION VIEW

PEDESTAL REINFORCEMENT NOT SHOWN. SEE REINFORCEMENT DETAILS.

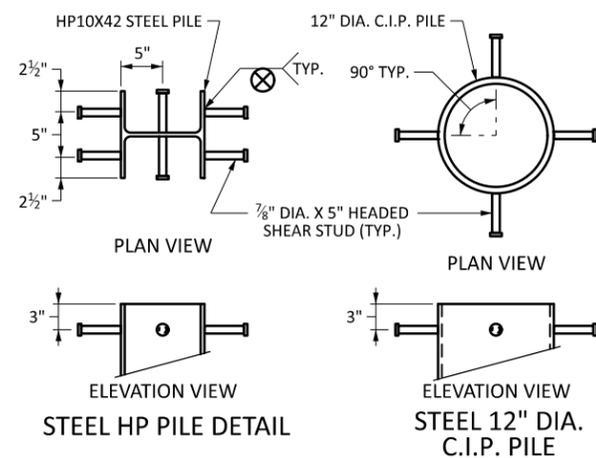


STEEL HP PILE DETAIL


STEEL 12\"/>

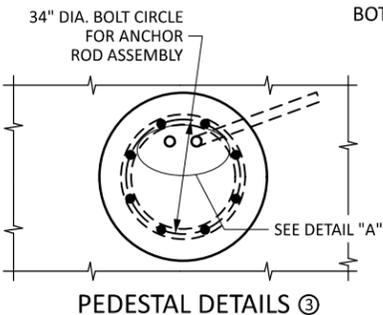


PEDESTAL DETAILS ③

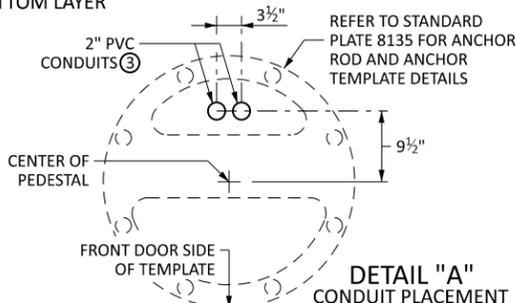


DETAIL \"/>

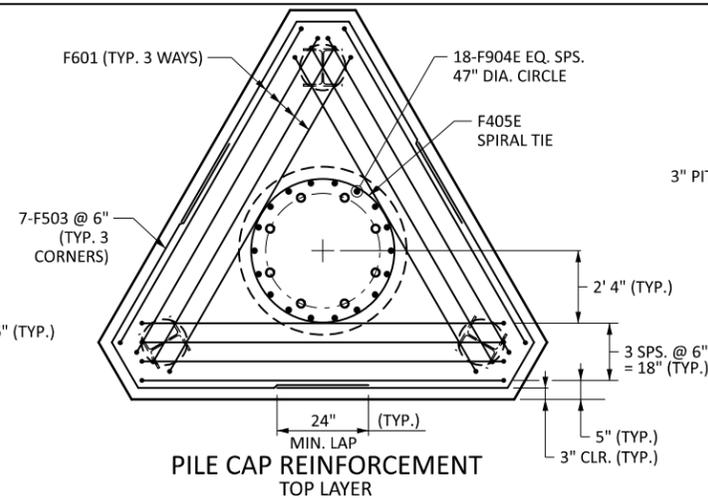


PILE CAP REINFORCEMENT TOP LAYER

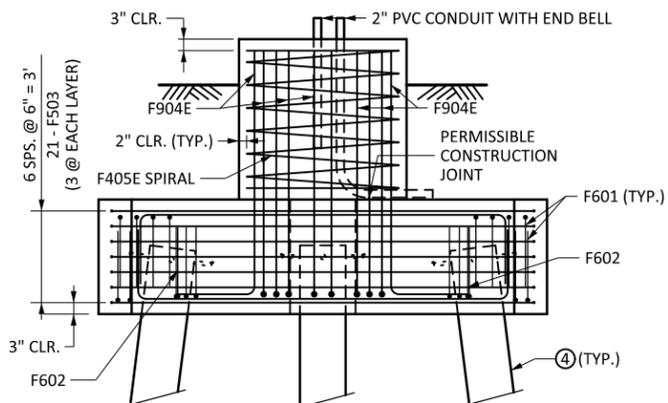

REINFORCEMENT DETAILS

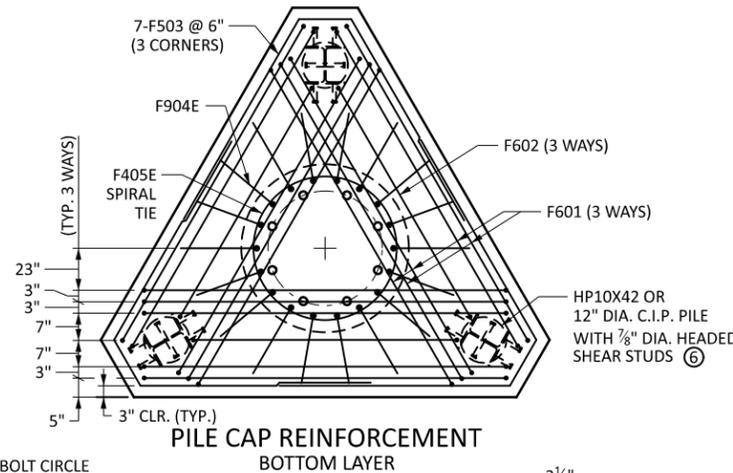


PILE CAP REINFORCEMENT BOTTOM LAYER

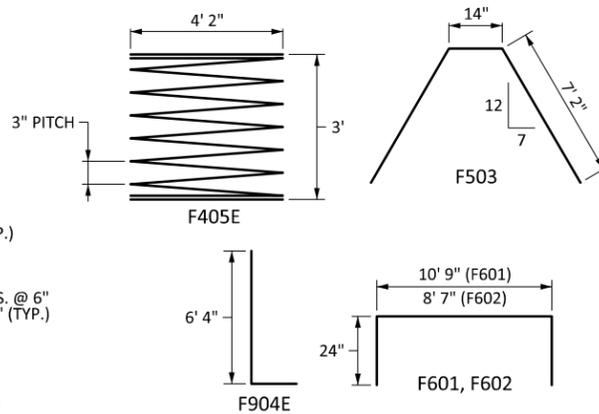

BAR DETAILS

| BILL OF REINFORCEMENT | | | | |
|-----------------------|-----|------------|-------|----------------------|
| BAR | NO. | LENGTH | SHAPE | LOCATION |
| F601 | 27 | 14' 9" | | FOOTING LONGITUDINAL |
| F602 | 3 | 12' 7" | | FOOTING LONGITUDINAL |
| F503 | 21 | 14' 8" | | FOOTING TIE |
| F904E | 18 | 8' 0" | | PEDESTAL DOWELS |
| F405E | 1 | SEE DETAIL | | PEDESTAL SPIRAL |

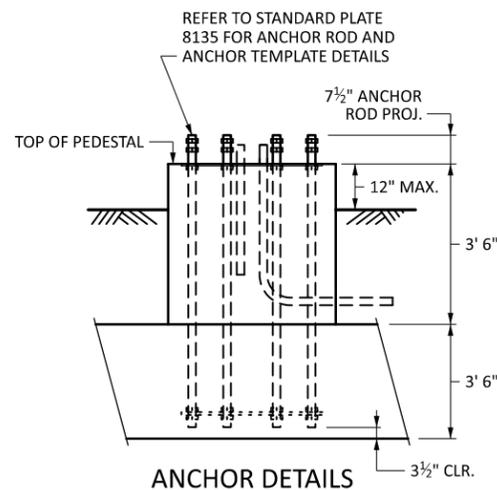

ANCHOR DETAILS

GEOTECHNICAL REQUIREMENTS:

REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30' OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MnDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45', OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30' BELOW THE PROPOSED FOOTING, 10' OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:

THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015, AND THE 2017 AND 2018 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS SIX. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.

MATERIAL DESIGN PROPERTIES:

CONCRETE: f'c = 4.5 ksi ; MnDOT MIX 3G52
REINFORCEMENT Fy = 60 ksi

WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.

SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.

FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS MARKED WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.

CONSTRUCTION NOTES:

CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.









PILE SPACING IS AT BOTTOM OF FOOTING. BATTERED PILES MARKED THUS

FOR PILE SPLICE DETAILS, SEE DETAIL B201 FOR 12" DIA. C.I.P. OR DETAIL B202 FOR HP10X42. USE OF COMMERCIAL DRIVE-FIT PILE SPLICES IS PROHIBITED.


NOTES:

- USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.
- OBTAIN THE ENGINEER'S APPROVAL OF THE EXOTHERMIC WELDED BONDING PILE CONNECTIONS BEFORE PLACEMENT OF PILE CAP REINFORCEMENT.
- FURNISH AND INSTALL AN ADDITIONAL 2" PVC CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.
- FURNISH AND INSTALL TWO UNSPLICED LENGTHS OF LIGHTNING PROTECTION CONDUCTORS MEETING THE FOLLOWING: BRAIDED BARE COPPER; AT LEAST 28 STRANDS OF 14 AWG WIRE; 1/2" DIA, ROPE LAY OF 115,000 CMIL; NET WEIGHT 375 LBS PER 100'. BOND ONE END OF EACH CONDUCTOR TO THE PILING AS SHOWN USING EXOTHERMIC WELDED LIGHTNING PROTECTION CONNECTIONS DESIGNED FOR PILING.
- ENSURE BOTTOM OF PILE CAP IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-100 PILE TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATION.
- USE THE PILE TYPE SPECIFIED IN THE "T-100 PILE TABLE" ON SHEET 1 OF 4. FOR H PILES USE HP 10X42. FOR CAST-IN-PLACE (C.I.P.) PILE USE 12" NOMINAL DIAMETER WITH 1/4" MINIMUM WALL THICKNESS.

| | | | | | | |
|--|--|---|-------------------------|---|-----------------------------------|--------------|
| | LEAD EXPERT OFFICE EDWARD LUTGEN OFFICE DIRECTOR BRIDGE OFFICE | T-100 LIGHT TOWER PILE FOUNDATION DESIGN | APPROVED: 11-15-2024 | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.840 | 2 OF 4 |
| | STATE PROJ. NO. | | SHEET NO. | STANDARD PLAN | TRUNK HWY. | TOTAL SHEETS |

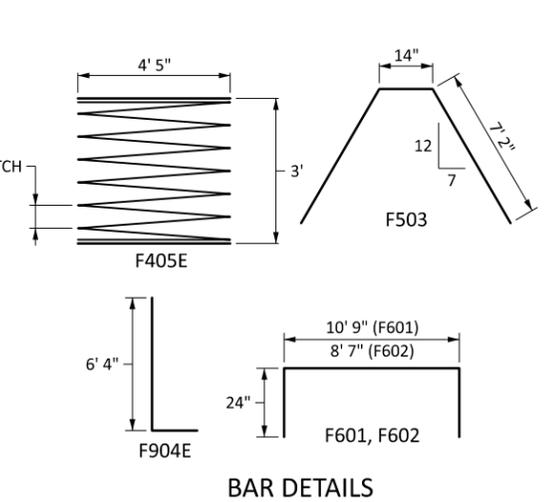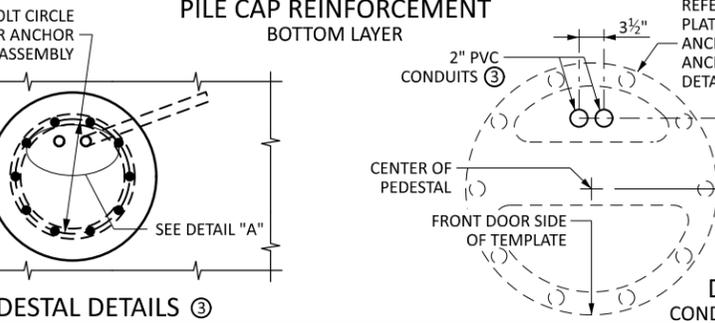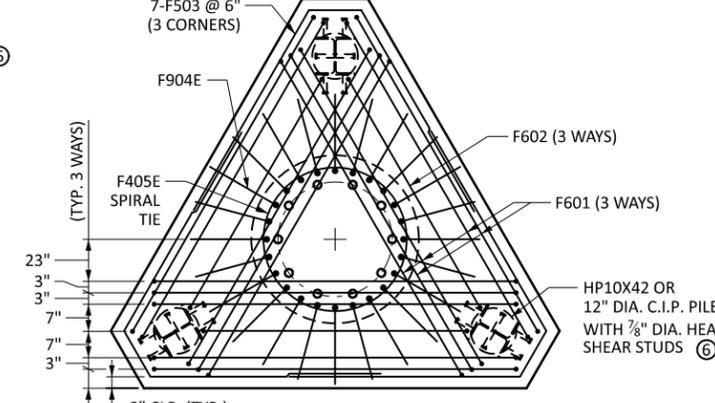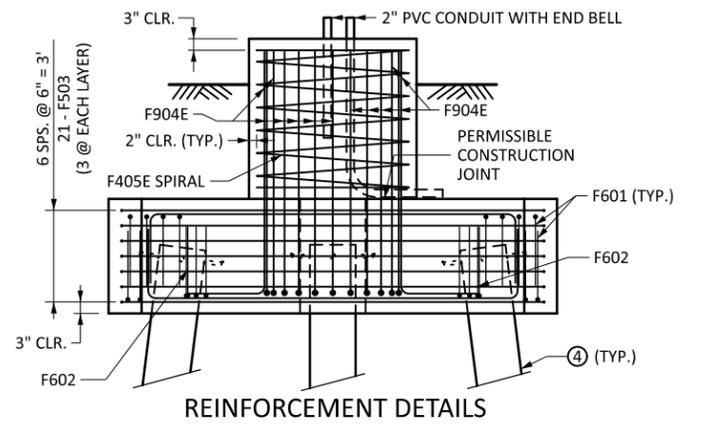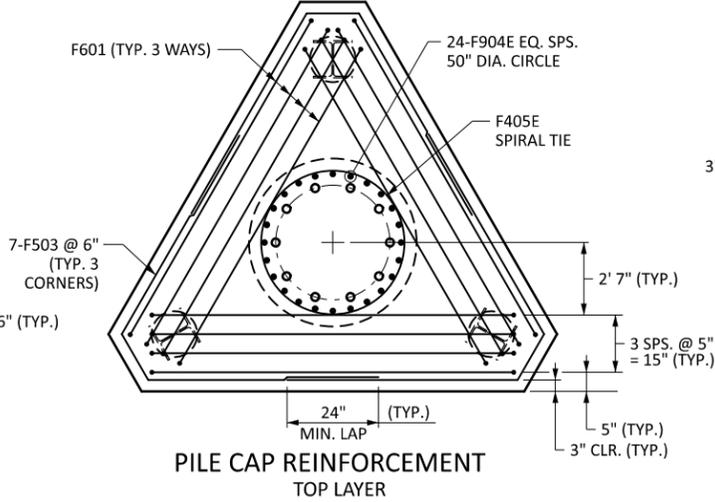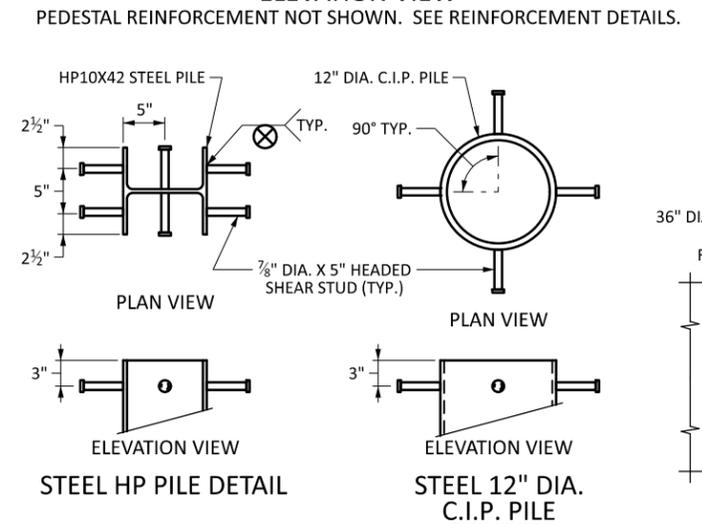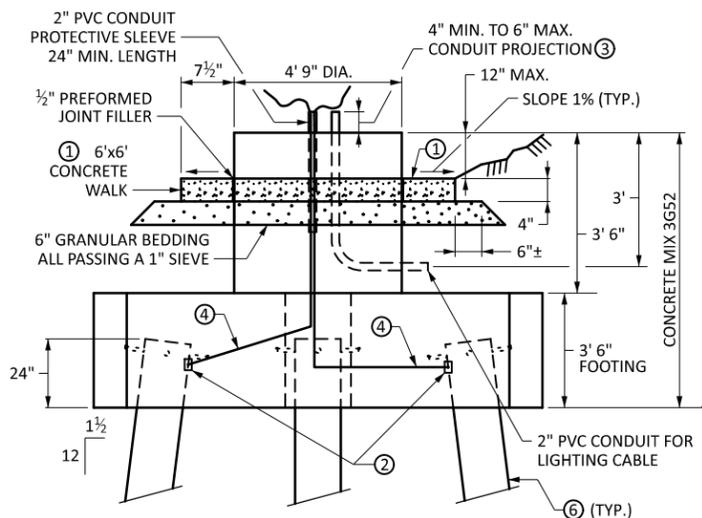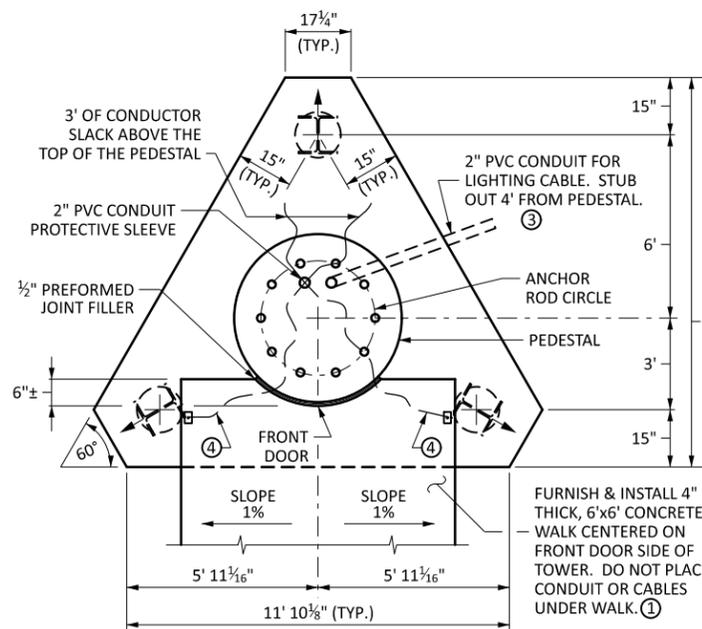

| BILL OF REINFORCEMENT | | | | |
|-----------------------|-----|------------|-------|----------------------|
| BAR | NO. | LENGTH | SHAPE | LOCATION |
| F601 | 27 | 14' 9" | | FOOTING LONGITUDINAL |
| F602 | 3 | 12' 7" | | FOOTING LONGITUDINAL |
| F503 | 21 | 14' 8" | | FOOTING TIE |
| F904E | 24 | 8' 0" | | PEDESTAL DOWELS |
| F405E | 1 | SEE DETAIL | | PEDESTAL SPIRAL |

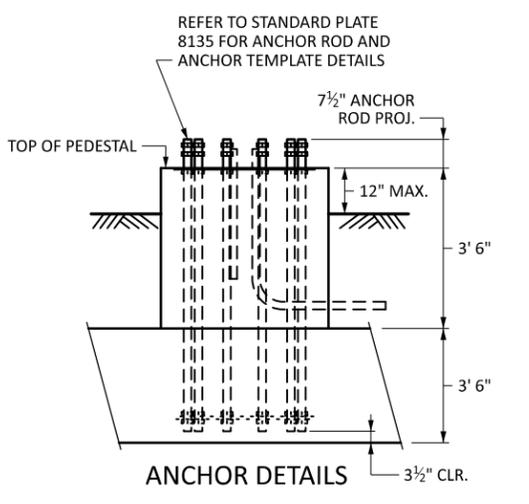

GEOTECHNICAL REQUIREMENTS:
 REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30 FT. OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MnDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45 FEET, OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30 FEET BELOW THE PROPOSED FOOTING, 10 FEET OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015, AND THE 2017 AND 2018 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH

THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS 6. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.

MATERIAL DESIGN PROPERTIES:
 CONCRETE: f'c = 4.5 ksi ; MnDOT MIX 3G52
 REINFORCEMENT Fy = 60 ksi

WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.

SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.

FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS MARKED WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.

CONSTRUCTION NOTES:
 CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.

PILE SPACING IS AT BOTTOM OF FOOTING. BATTERED PILES MARKED THUS

FOR PILE SPLICE DETAILS, SEE DETAIL B201 FOR 12" DIA. C.I.P. OR DETAIL B202 FOR HP10X42. USE OF COMMERCIAL DRIVE-FIT PILE SPLICES IS PROHIBITED.

NOTES:
 ① USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.

② OBTAIN THE ENGINEER'S APPROVAL OF THE EXOTHERMIC WELDED BONDING PILE CONNECTIONS BEFORE PLACEMENT OF PILE CAP REINFORCEMENT.

③ FURNISH AND INSTALL AN ADDITIONAL 2" PVC CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.




④ FURNISH AND INSTALL TWO UNSPLICED LENGTHS OF LIGHTNING PROTECTION CONDUCTORS MEETING THE FOLLOWING: BRAIDED BARE COPPER; AT LEAST 28 STRANDS OF 14 AWG WIRE; 1/2" DIA. ROPE LAY OF 115,000 CMIL; NET WEIGHT 375 LBS PER 1000'. BOND ONE END OF EACH CONDUCTOR TO THE PILING AS SHOWN USING EXOTHERMIC WELDED LIGHTING PROTECTION CONNECTIONS DESIGNED FOR PILING.

⑤ ENSURE BOTTOM OF PILE CAP IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-120 PILE TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATION.

⑥ USE THE PILE TYPE SPECIFIED IN THE "T-120 PILE TABLE" ON SHEET 1 OF 4. FOR H PILES USE HP 10X42. FOR CAST-IN-PLACE (C.I.P.) PILE USE 12" NOMINAL DIAMETER WITH 1/4" MINIMUM WALL THICKNESS.







| | | | | | | | | |
|--------------------|---|--|--|--|-------------------------|---|----------------------------|--------|
| LEAD EXPERT OFFICE | EDWARD LUTGEN OFFICE DIRECTOR BRIDGE OFFICE | T-120 LIGHT TOWER PILE FOUNDATION DESIGN | | | APPROVED: 11-15-2024 | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.840 | 3 OF 4 |
|--------------------|---|--|--|--|-------------------------|---|----------------------------|--------|

| | | | | | |
|------------------------------|---------------|--|--|-----------------|--------------|
| DEPARTMENT OF TRANSPORTATION | STANDARD PLAN | | | STATE PROJ. NO. | SHEET NO. |
| | | | | TRUNK HWY. | TOTAL SHEETS |

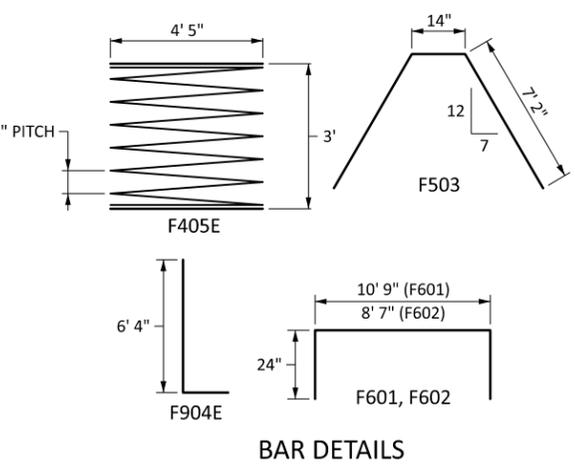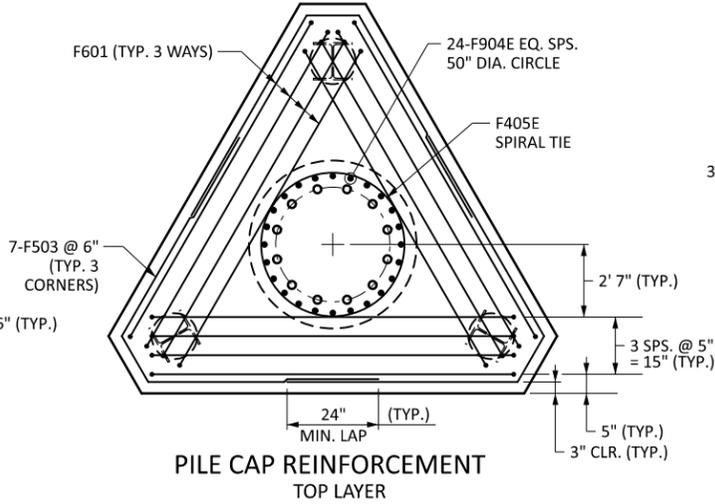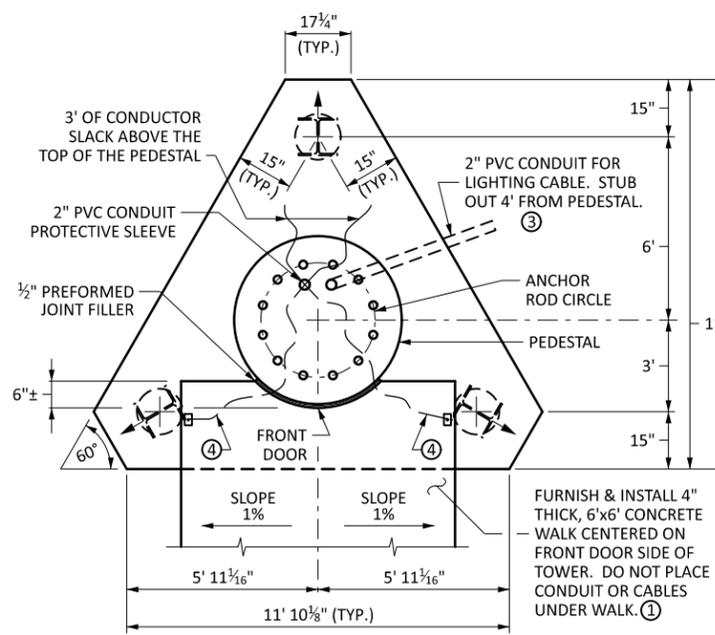

BILL OF REINFORCEMENT

| BAR | NO. | LENGTH | SHAPE | LOCATION |
|-------|-----|------------|-------|----------------------|
| F601 | 27 | 14' 9" | | FOOTING LONGITUDINAL |
| F602 | 3 | 12' 7" | | FOOTING LONGITUDINAL |
| F503 | 21 | 14' 8" | | FOOTING TIE |
| F904E | 24 | 8' 0" | | PEDESTAL DOWELS |
| F405E | 1 | SEE DETAIL | | PEDESTAL SPIRAL |

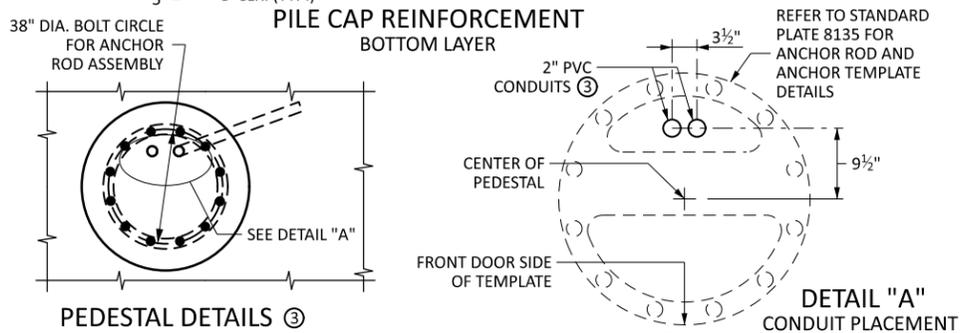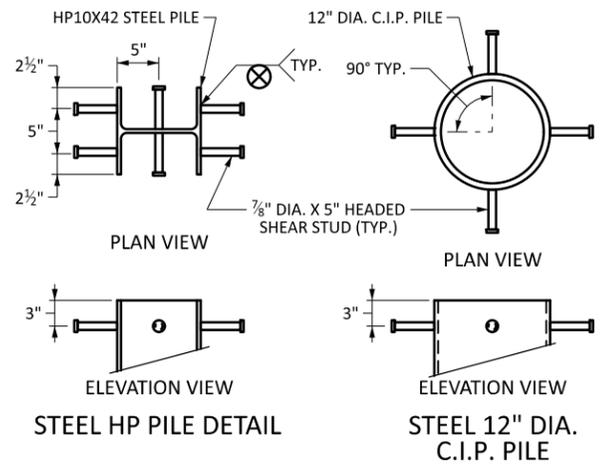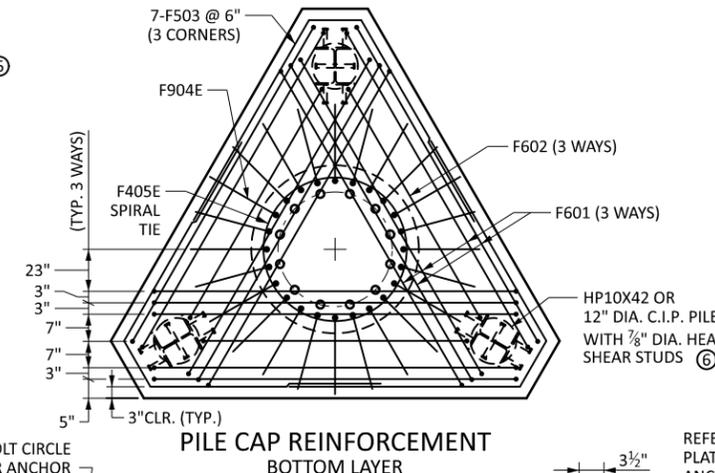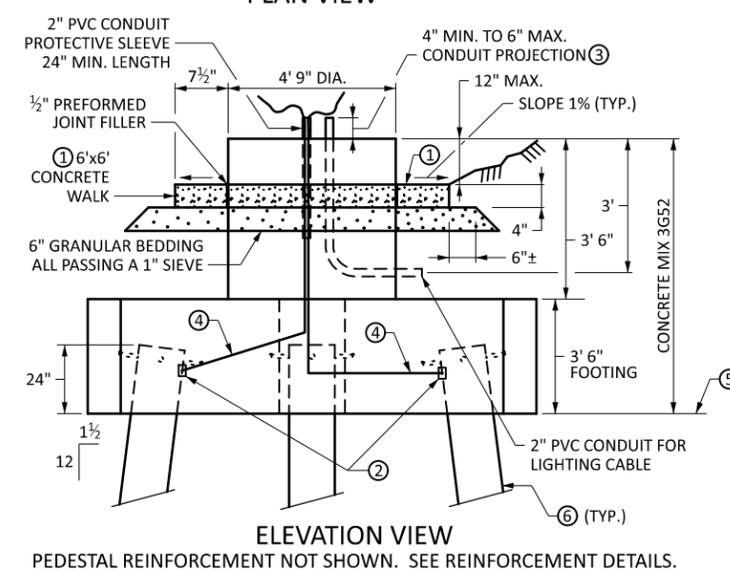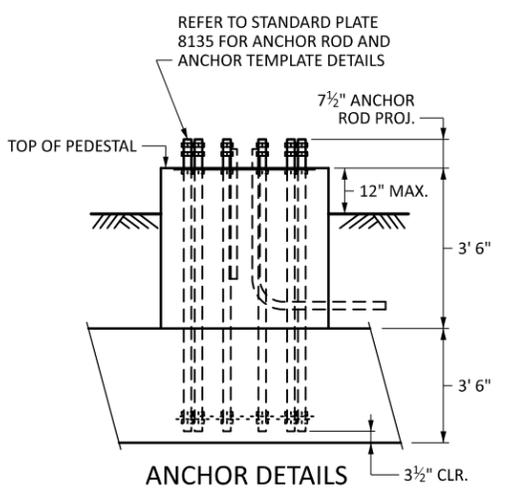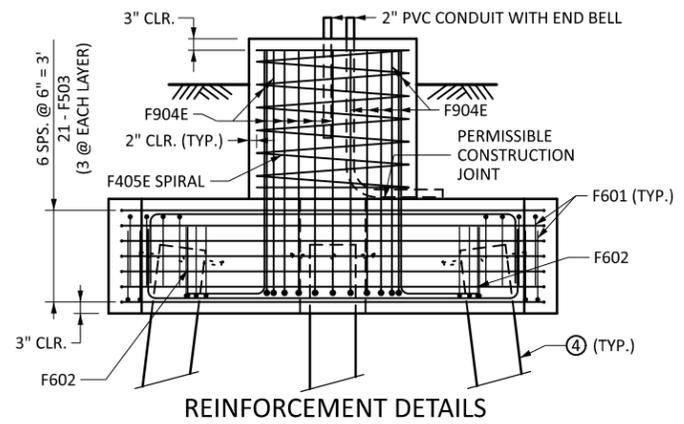

GEOTECHNICAL REQUIREMENTS:
REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30 FT. OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MNDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45 FEET, OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30 FEET BELOW THE PROPOSED FOOTING, 10 FEET OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:
THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015, AND THE 2017 AND 2018 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH

THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS SIX. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.

MATERIAL DESIGN PROPERTIES:
CONCRETE: f'c = 4.5 ksi ; MndOT MIX 3G52
REINFORCEMENT Fy = 60 ksi

WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.

SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.

FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS MARKED WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.

CONSTRUCTION NOTES:
CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.

PILE SPACING IS AT BOTTOM OF FOOTING. BATTERED PILES MARKED THUS .
FOR PILE SPLICE DETAILS, SEE DETAIL B201 FOR 12" DIA. C.I.P. OR DETAIL B202 FOR HP10X42. USE OF COMMERCIAL DRIVE-FIT PILE SPLICES IS PROHIBITED.

- NOTES:**
- USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.
 - OBTAIN THE ENGINEER'S APPROVAL OF THE EXOTHERMIC WELDED BONDING PILE CONNECTIONS BEFORE PLACEMENT OF PILE CAP REINFORCEMENT.
 - FURNISH AND INSTALL AN ADDITIONAL 2" PVC CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.
 - FURNISH AND INSTALL TWO UNSPLICED LENGTHS OF LIGHTNING PROTECTION CONDUCTORS MEETING THE FOLLOWING: BRAIDED BARE COPPER; AT LEAST 28 STRANDS OF 14 AWG WIRE; 1/2" DIA, ROPE LAY OF 115,000 CMIL; NET WEIGHT 375 LBS PER 1000'. BOND ONE END OF EACH CONDUCTOR TO THE PILING AS SHOWN USING EXOTHERMIC WELDED LIGHTING PROTECTION CONNECTIONS DESIGNED FOR PILING.
 - ENSURE BOTTOM OF PILE CAP IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-140 PILE TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATION.
 - USE THE PILE TYPE SPECIFIED IN THE "T-140 PILE TABLE" ON SHEET 1 OF 4. FOR H PILES USE HP 10X42. FOR CAST-IN-PLACE (C.I.P.) PILE USE 12" NOMINAL DIAMETER WITH 1/4" MINIMUM WALL THICKNESS.

| T-100 FOOTING TABLE | | | | |
|---------------------|-----------------------------|--------------|----------------------------|---------------------------|
| TOWER NO. | BOTTOM OF FOOTING ELEVATION | SUBCUT DEPTH | BOTTOM OF SUBCUT ELEVATION | BACKFILL MATERIAL (SPEC.) |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| T-120 FOOTING TABLE | | | | |
|---------------------|-----------------------------|--------------|----------------------------|---------------------------|
| TOWER NO. | BOTTOM OF FOOTING ELEVATION | SUBCUT DEPTH | BOTTOM OF SUBCUT ELEVATION | BACKFILL MATERIAL (SPEC.) |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| T-140 FOOTING TABLE | | | | |
|---------------------|-----------------------------|--------------|----------------------------|---------------------------|
| TOWER NO. | BOTTOM OF FOOTING ELEVATION | SUBCUT DEPTH | BOTTOM OF SUBCUT ELEVATION | BACKFILL MATERIAL (SPEC.) |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

LEAD EXPERT OFFICE
 EDWARD LUTGEN
 OFFICE DIRECTOR
 BRIDGE OFFICE

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.
 CERTIFIED BY: _____ DATE _____
 LICENSED PROFESSIONAL ENGINEER LIC. NO. _____
 PRINTED NAME: _____

LIGHT TOWER MAT FOUNDATION DESIGN

APPROVED:
 11-15-2024

Tom Styrbicki
 THOMAS STYRBICKI
 STATE DESIGN ENGINEER

STANDARD PLAN
 5-297.841



1 OF 4



STANDARD PLAN

STATE PROJ. NO.
 TRUNK HWY.

SHEET NO.
 TOTAL SHEETS

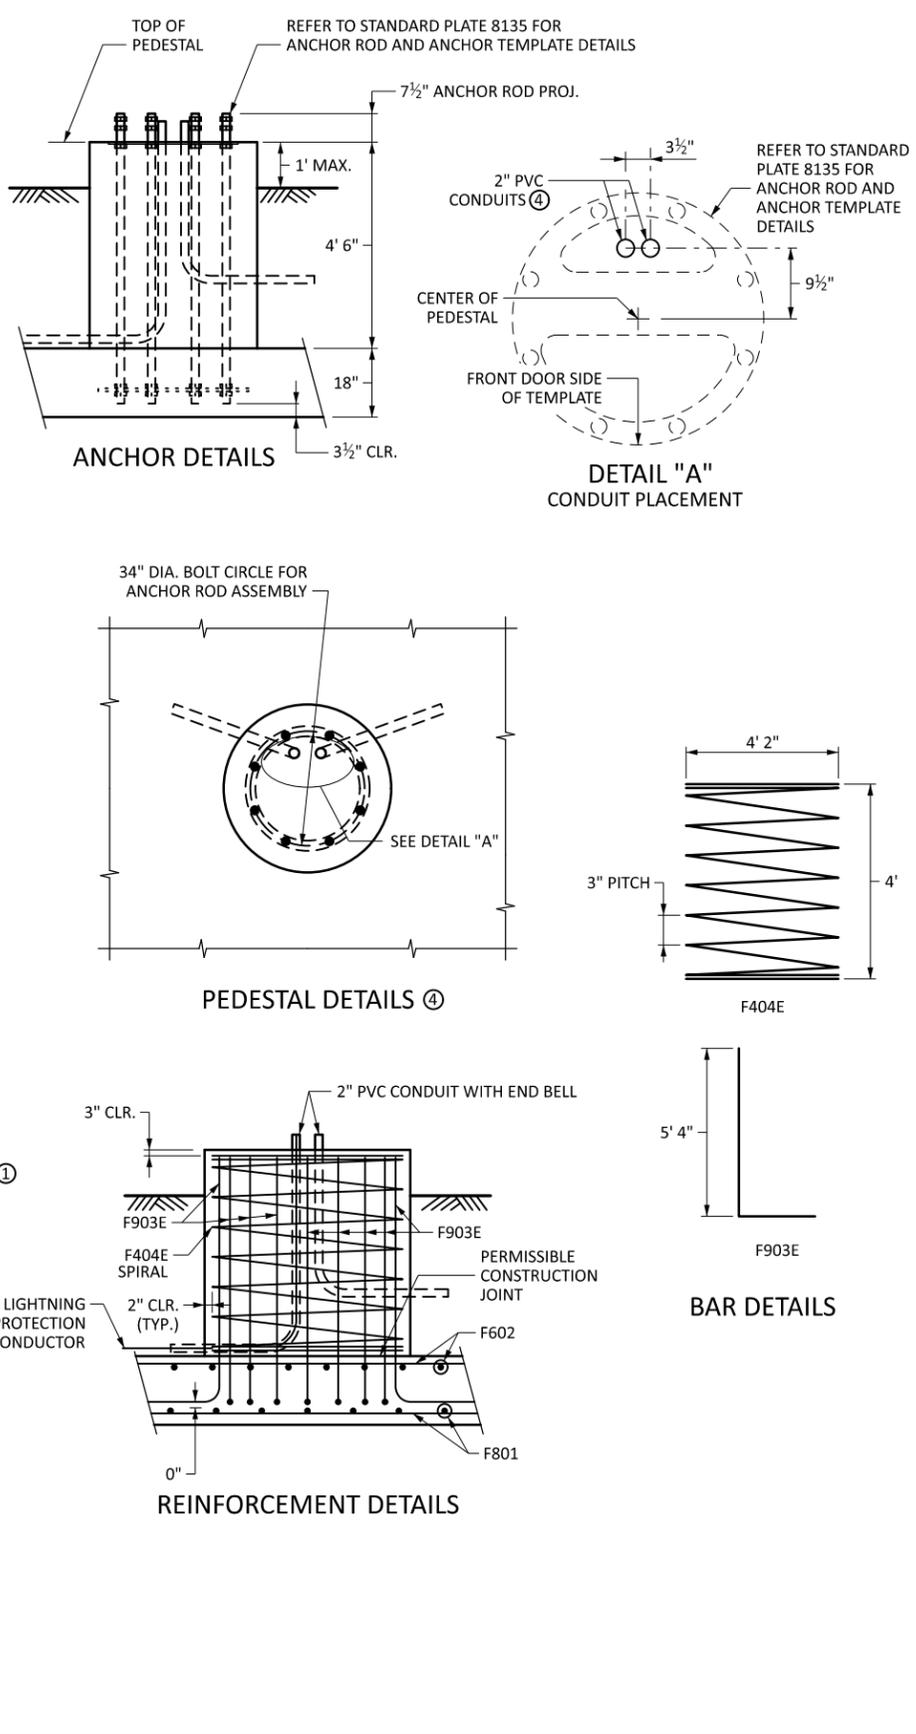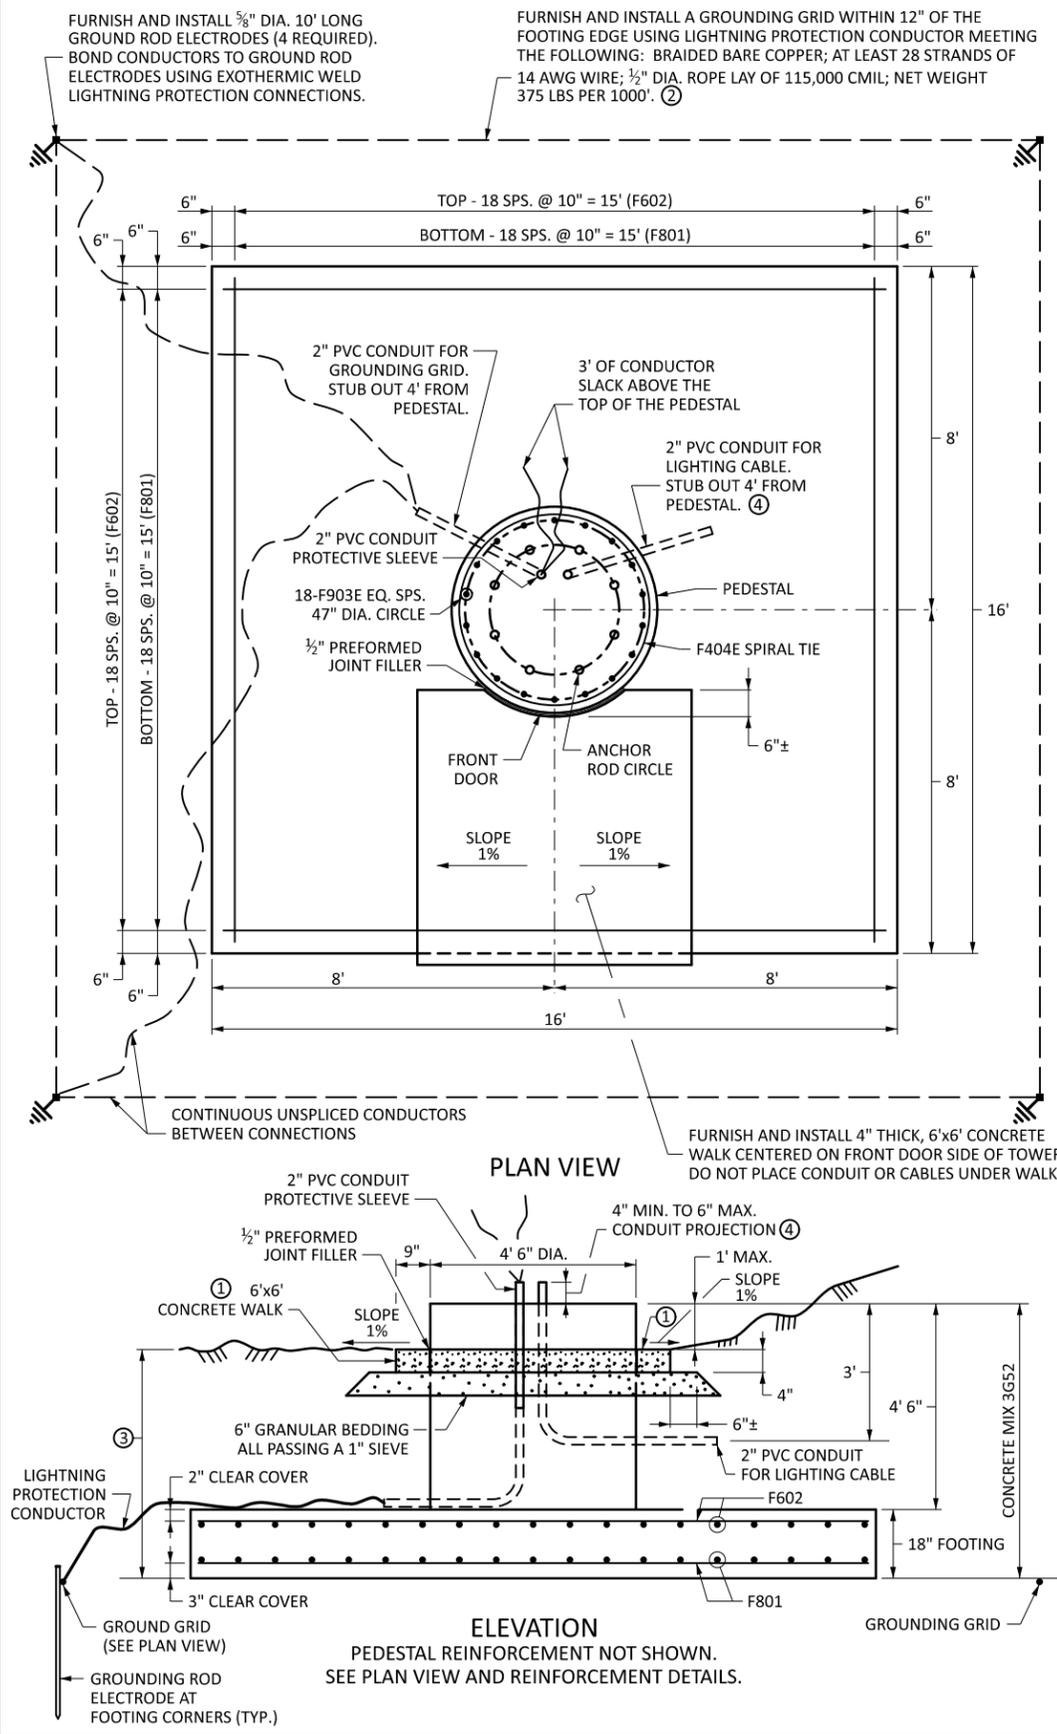

| BILL OF REINFORCEMENT | | | | |
|-----------------------|-----|------------|-------|-----------------|
| BAR | NO. | LENGTH | SHAPE | LOCATION |
| F801 | 38 | 15' 6" | | FOOTING |
| F602 | 38 | 15' 6" | | FOOTING |
| F903E | 18 | 7' 0" | | PEDESTAL DOWELS |
| F404E | 1 | SEE DETAIL | | PEDESTAL SPIRAL |

GEOTECHNICAL REQUIREMENTS:
 REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30' OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MnDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45', OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30' BELOW THE PROPOSED FOOTING, 10' OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015, AND THE 2017 AND 2018 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS SIX. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.

THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.

THE WATER TABLE IS ASSUMED TO BE BELOW THE BOTTOM OF SUBCUT OR FOOTING ELEVATION.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|---------------|-------------------------|-------------------------------|
| SERVICE | 11.20 | 1.40 |
| EXTREME EVENT | 11.64 | 1.43 |

MATERIAL DESIGN PROPERTIES:
 CONCRETE: $f'_c = 4.5$ ksi; MnDOT MIX 3G52
 REINFORCEMENT: $F_y = 60$ ksi

WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.
 SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.

FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.

DESIGNS ARE BASED ON A SOIL PROFILE WHICH MEETS OR EXCEEDS THE FOLLOWING MINIMUM SOIL PARAMETERS:







| | |
|----------------------------------|----------------------------------|
| SANDY SOILS | CLAY SOILS |
| EFFECTIVE UNIT WEIGHT = 52.5 PCF | EFFECTIVE UNIT WEIGHT = 57.5 PCF |
| FRICTION ANGLE = 30° | COHESION = 1000 PSF |
| | FRICTION ANGLE = 0° |

CONSTRUCTION NOTES:
 AFTER EXCAVATING THE FOUNDATION SITE AND PERFORMING ANY REQUIRED SUBCUTS, (SEE "T-100 FOOTING TABLE" ON SHEET 1 OF 4) EVALUATE AND INSPECT THE SITE CONDITIONS TO ENSURE THAT BEARING SOILS ARE UNIFORM AND CONSISTENT WITH DESIGN ASSUMPTIONS. CONTACT THE MnDOT FOUNDATIONS UNIT IF SITE CONDITIONS DIFFER. AFTER THE FOUNDATION SITE IS REVIEWED AND APPROVED, PROCEED WITH SUBCUT BACKFILLING AND FOOTING CONSTRUCTION.

CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.

- NOTES:**
- USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.
 - OBTAIN THE ENGINEER'S APPROVAL OF THE COMPLETED GROUNDING GRID BEFORE BACKFILLING AROUND THE FOOTING.
 - ENSURE BOTTOM OF FOOTING IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-100 FOOTING TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATIONS.
 - FURNISH AND INSTALL AN ADDITIONAL 2" CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.

| | | | | | |
|-------------------------------|---|---|--|----------------------------|-------------------------------|
| LEAD EXPERT OFFICE | EDWARD LUTGEN OFFICE DIRECTOR BRIDGE OFFICE | T-100 LIGHT TOWER MAT FOUNDATION DESIGN | APPROVED: 11-15-2024 THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.841 | 2 OF 4 |
| | | | | STANDARD PLAN | STATE PROJ. NO. TRUNK HWY. |

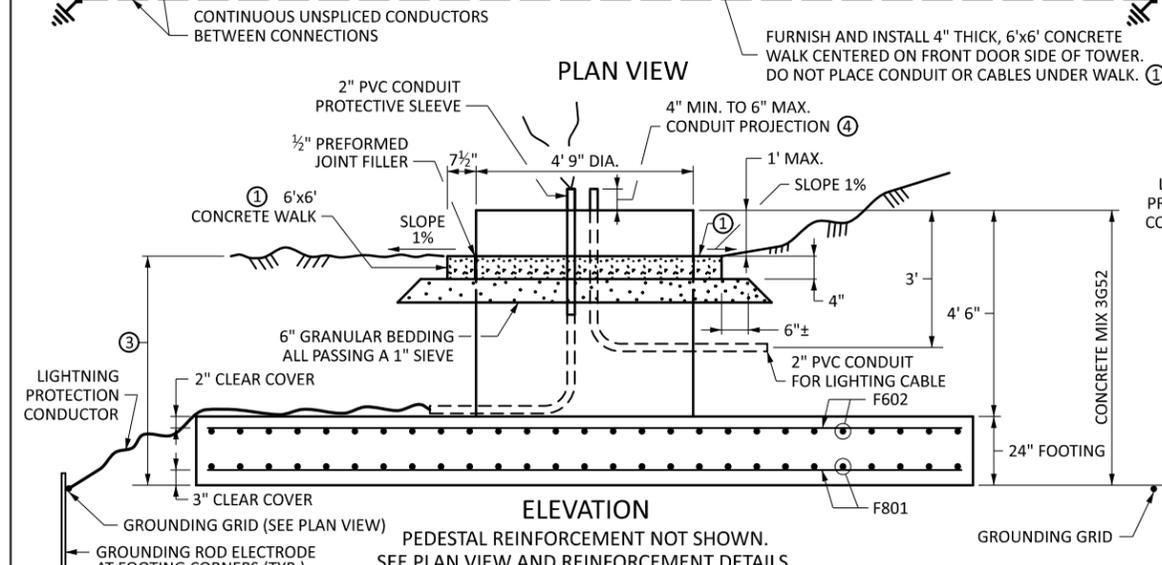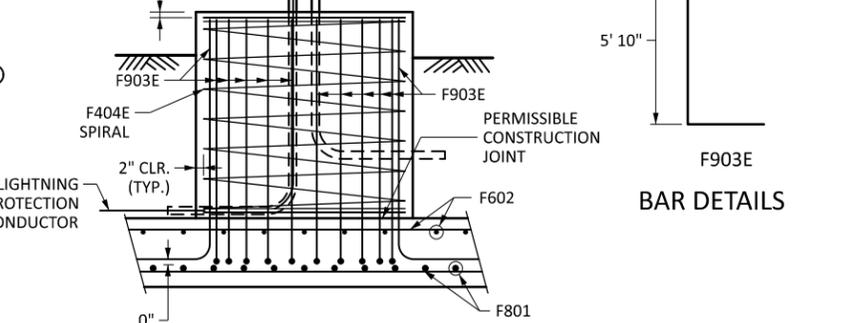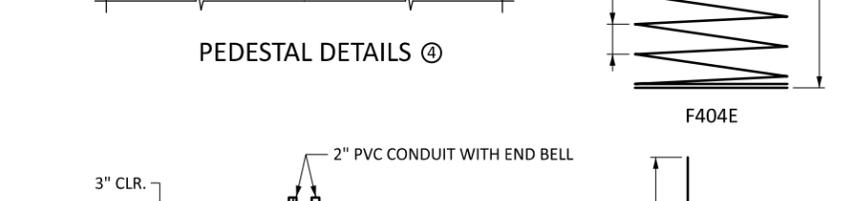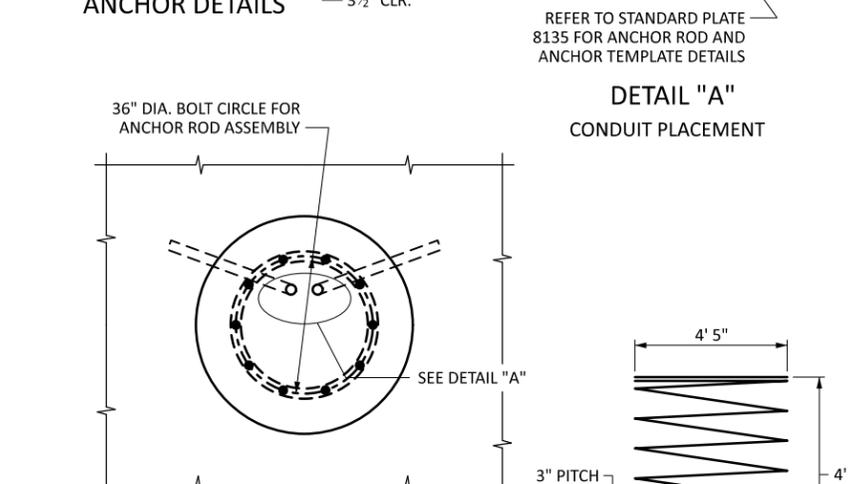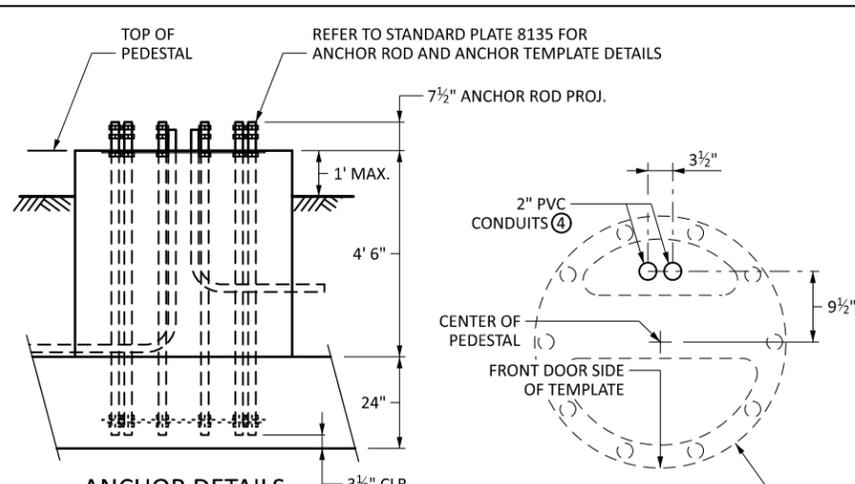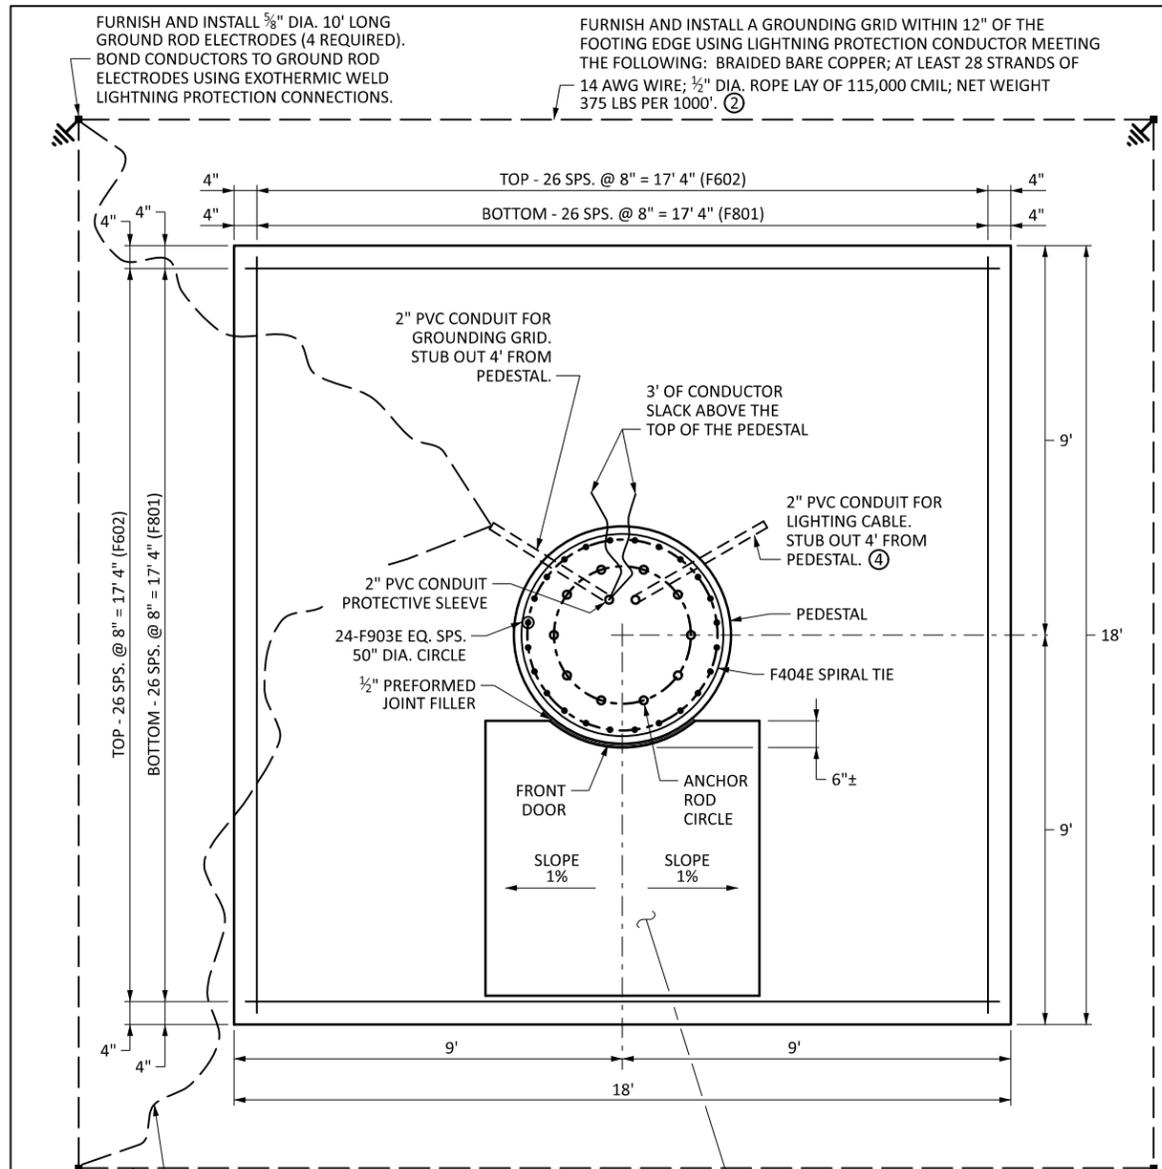

| BILL OF REINFORCEMENT | | | | |
|-----------------------|-----|------------|-------|-----------------|
| BAR | NO. | LENGTH | SHAPE | LOCATION |
| F801 | 54 | 17' 6" | — | FOOTING |
| F602 | 54 | 17' 6" | — | FOOTING |
| F903E | 24 | 7' 6" | — | PEDESTAL DOWELS |
| F404E | 1 | SEE DETAIL | — | PEDESTAL SPIRAL |

GEOTECHNICAL REQUIREMENTS:
 REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30' OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MnDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45', OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30' BELOW THE PROPOSED FOOTING, 10' OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015 AND THE 2017 AND 2018 INTERIM REVISIONS.
 STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.
 THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS SIX. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.
 THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.
 THE WATER TABLE IS ASSUMED TO BE BELOW THE BOTTOM OF SUBCUT OR FOOTING ELEVATION.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|---------------|-------------------------|-------------------------------|
| SERVICE | 12.80 | 1.51 |
| EXTREME EVENT | 13.14 | 1.54 |

MATERIAL DESIGN PROPERTIES:
 CONCRETE: $f_c = 4.5$ ksi ; MnDOT MIX 3G52
 REINFORCEMENT: $F_y = 60$ ksi

WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.
 SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.

FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.

DESIGNS ARE BASED ON A SOIL PROFILE WHICH MEETS OR EXCEEDS THE FOLLOWING MINIMUM SOIL PARAMETERS:

| | |
|----------------------------------|----------------------------------|
| <u>SANDY SOILS</u> | <u>CLAY SOILS</u> |
| EFFECTIVE UNIT WEIGHT = 52.5 PCF | EFFECTIVE UNIT WEIGHT = 57.5 PCF |
| FRICITION ANGLE = 30° | COHESION = 1000 PSF |
| | FRICITION ANGLE = 0° |






CONSTRUCTION NOTES:
 AFTER EXCAVATING THE FOUNDATION SITE AND PERFORMING ANY REQUIRED SUBCUTS (SEE "T-120 FOOTING TABLE" ON SHEET 1 OF 4), EVALUATE AND INSPECT THE SITE CONDITIONS TO ENSURE THAT BEARING SOILS ARE UNIFORM AND CONSISTENT WITH DESIGN ASSUMPTIONS. CONTACT THE MnDOT FOUNDATIONS UNIT IF SITE CONDITIONS DIFFER. AFTER THE FOUNDATION SITE IS REVIEWED AND APPROVED, PROCEED WITH SUBCUT BACKFILLING AND FOOTING CONSTRUCTION.
 CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.

- NOTES:**
- USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.
 - OBTAIN THE ENGINEER'S APPROVAL OF THE COMPLETED GROUNDING GRID BEFORE BACKFILLING AROUND THE FOOTING.
 - ENSURE BOTTOM OF FOOTING IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-120 FOOTING TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATIONS.
 - FURNISH AND INSTALL AN ADDITIONAL 2" CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.

| | | | | |
|--|--|--|-----------------------------------|---------------------------|
| LEAD EXPERT OFFICE EDWARD LUTGEN OFFICE DIRECTOR BRIDGE OFFICE | T-120 LIGHT TOWER MAT FOUNDATION DESIGN | APPROVED: 11-15-2024 THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.841 | 3 OF 4 |
| | | | STATE PROJ. NO. TRUNK HWY. | SHEET NO. TOTAL SHEETS |



STANDARD PLAN

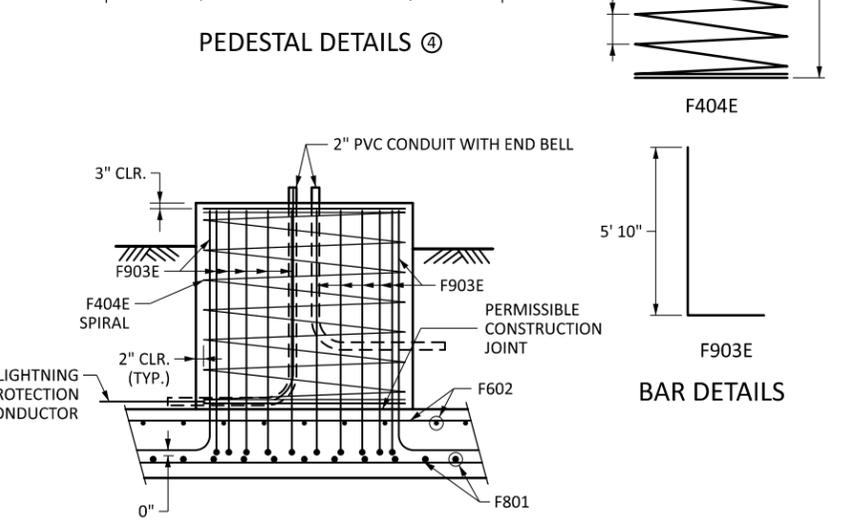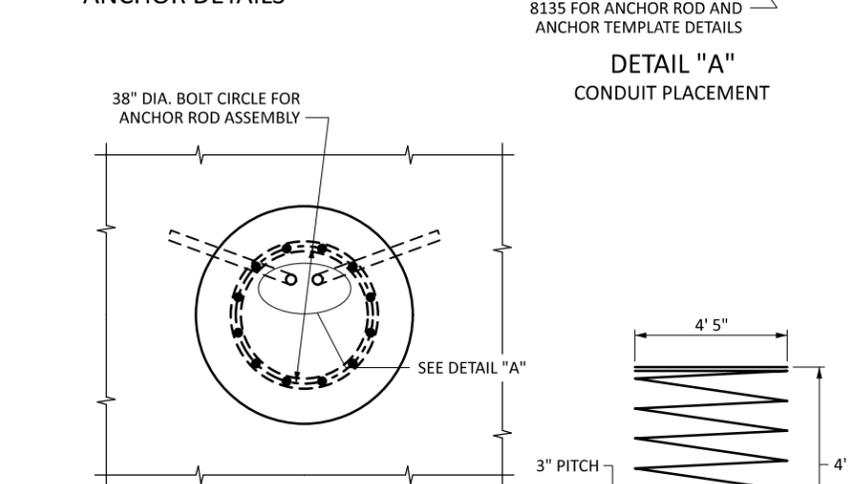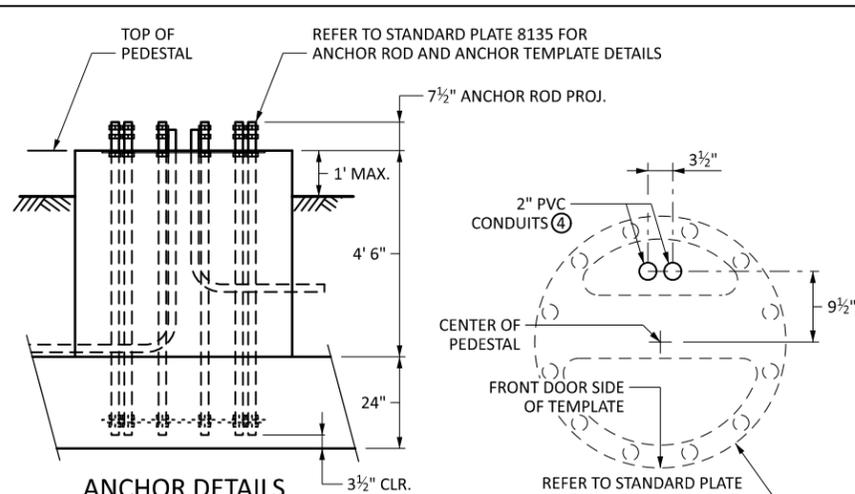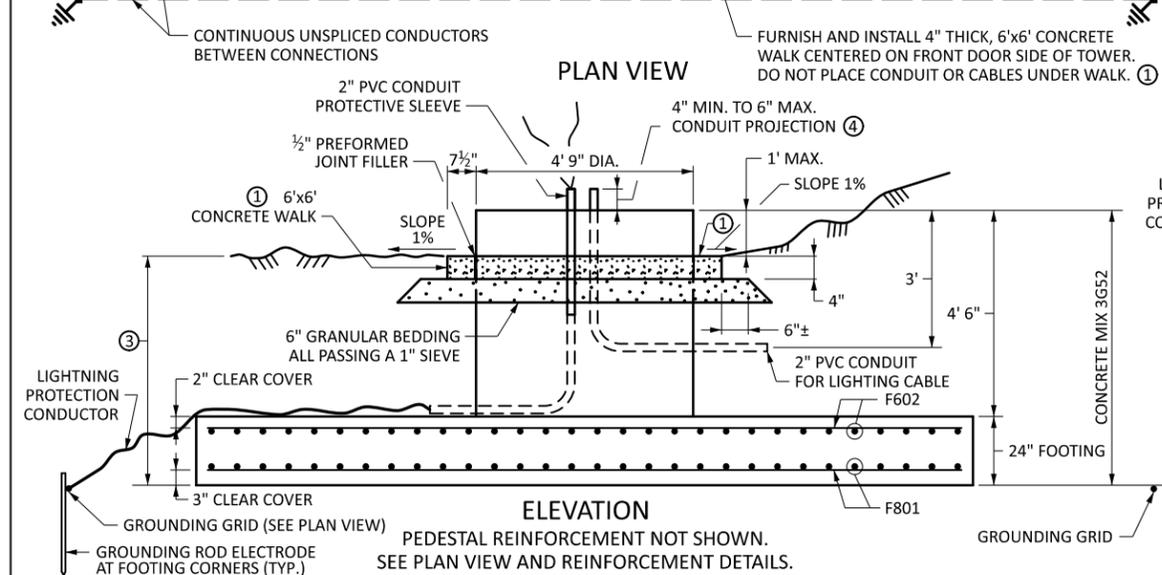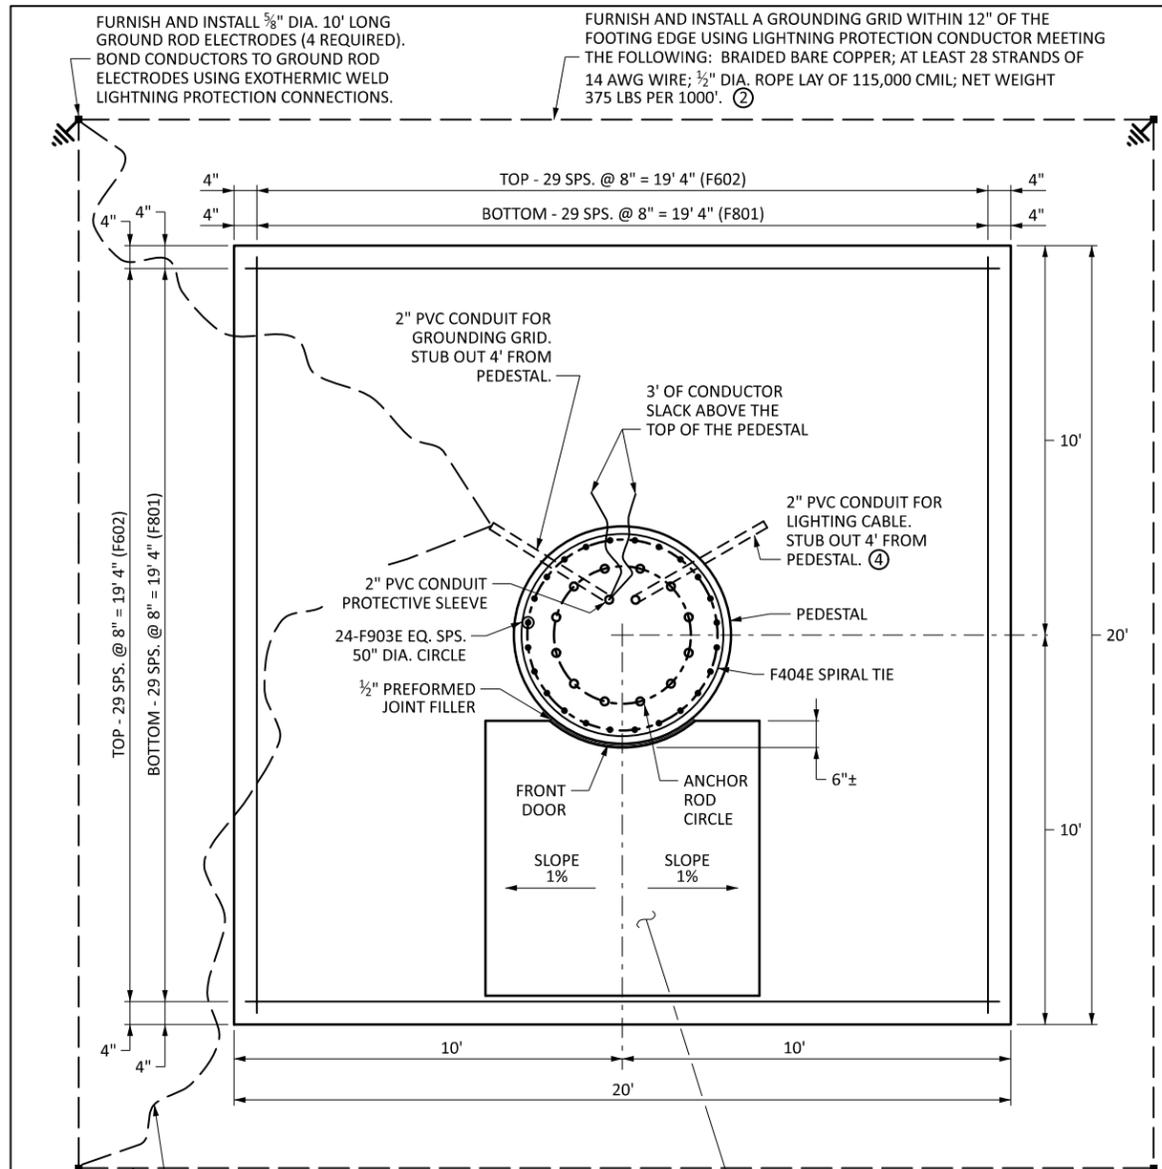

| BILL OF REINFORCEMENT | | | | |
|-----------------------|-----|------------|-------|-----------------|
| BAR | NO. | LENGTH | SHAPE | LOCATION |
| F801 | 60 | 19' 6" | — | FOOTING |
| F602 | 60 | 19' 6" | — | FOOTING |
| F903E | 24 | 7' 6" | — | PEDESTAL DOWELS |
| F404E | 1 | SEE DETAIL | — | PEDESTAL SPIRAL |

GEOTECHNICAL REQUIREMENTS:
 REQUIRED SUBSURFACE INVESTIGATION: TAKE A MINIMUM OF ONE STANDARD PENETRATION TEST (SPT) FOUNDATION BORING OR ONE CONE PENETRATION TEST (CPT) SOUNDING AT EACH LIGHT TOWER LOCATION. ADVANCE THE BORING/SOUNDING WITHIN 30' OF THE PLANNED TOWER LOCATION AND FOLLOW THE REQUIREMENTS OF MnDOT'S GEOTECHNICAL INVESTIGATION SPECIFICATIONS. INVESTIGATE TO A MINIMUM DEPTH OF 45', OR TO TOP OF ROCK, BELOW THE PROPOSED FOOTING ELEVATION. WHERE ROCK IS ENCOUNTERED WITHIN 30' BELOW THE PROPOSED FOOTING, 10' OF ROCK CORING IS REQUIRED.

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THESE STANDARD PLANS ARE BASED ON THE AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, FIRST EDITION, 2015 AND THE 2017 AND 2018 INTERIM REVISIONS.
 STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.
 THE MAXIMUM NUMBER OF LUMINAIRES ON THE TOP OF THE LIGHT TOWER IS SIX. THE MAXIMUM EFFECTIVE PROJECTED AREA (EPA) OF THE TOTAL LUMINAIRES AND RING ASSEMBLY AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 50 SQ. FT.
 THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.
 THE WATER TABLE IS ASSUMED TO BE BELOW THE BOTTOM OF SUBCUT OR FOOTING ELEVATION.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|---------------|-------------------------|-------------------------------|
| SERVICE | 13.96 | 1.57 |
| EXTREME EVENT | 14.50 | 1.60 |

MATERIAL DESIGN PROPERTIES:
 CONCRETE: $f_c = 4.5$ ksi ; MnDOT MIX 3G52
 REINFORCEMENT: $f_y = 60$ ksi
 WELDED WIRE REINFORCEMENT IN ACCORDANCE WITH SPEC. 3303.
 SPIRAL REINFORCEMENT IN ACCORDANCE WITH SPEC. 3305, OR DEFORMED GRADE 60 BILLET STEEL IN ACCORDANCE WITH SPEC. 3301.
 FOR BARS OTHER THAN SPIRAL ROD STOCK, USE DEFORMED STEEL BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. EPOXY COAT BARS WITH THE SUFFIX "E" IN ACCORDANCE WITH SPEC. 3301.


DESIGNS ARE BASED ON A SOIL PROFILE WHICH MEETS OR EXCEEDS THE FOLLOWING MINIMUM SOIL PARAMETERS:
SANDY SOILS
 EFFECTIVE UNIT WEIGHT = 52.5 PCF
 FRICTION ANGLE = 30°
CLAY SOILS
 EFFECTIVE UNIT WEIGHT = 57.5 PCF
 COHESION = 1000 PSF
 FRICTION ANGLE = 0°

CONSTRUCTION NOTES:
 AFTER EXCAVATING THE FOUNDATION SITE AND PERFORMING ANY REQUIRED SUBCUTS (SEE "T-140 FOOTING TABLE" ON SHEET 1 OF 4), EVALUATE AND INSPECT THE SITE CONDITIONS TO ENSURE THAT BEARING SOILS ARE UNIFORM AND CONSISTENT WITH DESIGN ASSUMPTIONS. CONTACT THE MnDOT FOUNDATIONS UNIT IF SITE CONDITIONS DIFFER. AFTER THE FOUNDATION SITE IS REVIEWED AND APPROVED, PROCEED WITH SUBCUT BACKFILLING AND FOOTING CONSTRUCTION.
 CONFIRM PEDESTAL AND FOOTING CONCRETE HAVE ATTAINED 4500 PSI COMPRESSIVE STRENGTH BEFORE PLACING TOWER.

- NOTES:**
- USE WELDED WIRE REINFORCEMENT 6 X 6-W2.9 X W2.9 IN ACCORDANCE WITH SPEC. 3303. PLACE REINFORCEMENT AT SLAB MID-DEPTH. CONCRETE MIX NO. 3F52. FINISH GRADING THE SITE TO BLEND WITH EXISTING SLOPES AS APPROVED BY THE ENGINEER.
 - OBTAIN THE ENGINEER'S APPROVAL OF THE COMPLETED GROUNDING GRID BEFORE BACKFILLING AROUND THE FOOTING.
 - ENSURE BOTTOM OF FOOTING IS AT LEAST 5' BELOW FINISHED GRADE. REFER TO "T-140 FOOTING TABLE" ON SHEET 1 OF 4 FOR FOOTING ELEVATIONS.
 - FURNISH AND INSTALL AN ADDITIONAL 2" CONDUIT FOR FUTURE USE AT LOCATIONS SHOWN ON THE LIGHTING PLANS.


| | | | | |
|--|--|--|-----------------------------------|--------|
| LEAD EXPERT OFFICE EDWARD LUTGEN OFFICE DIRECTOR BRIDGE OFFICE | T-140 LIGHT TOWER MAT FOUNDATION DESIGN | APPROVED: 11-15-2024 THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.841 | 4 OF 4 |
| | | | | |

| | | | | |
|--|----------------------|--|-----------------|--------------|
| | STANDARD PLAN | | STATE PROJ. NO. | SHEET NO. |
| | | | TRUNK HWY. | TOTAL SHEETS |

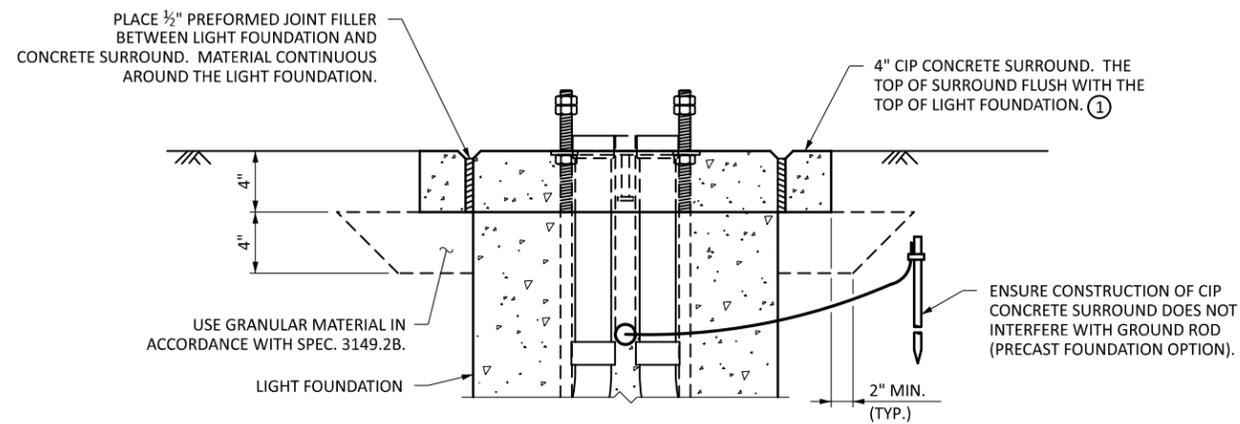

VERTICAL SECTION

PRECAST FOUNDATION OPTION SHOWN. CIP FOUNDATION SIMILAR.
FOUNDATION REINFORCEMENT AND ANCHOR ROD TEMPLATES NOT SHOWN FOR CLARITY.

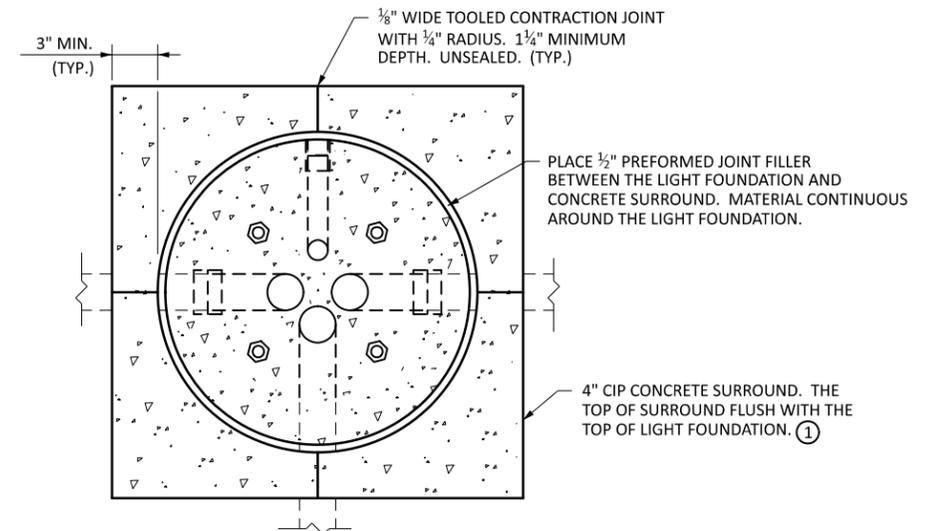

PLAN

PRECAST FOUNDATION OPTION SHOWN. CIP FOUNDATION SIMILAR.
FOUNDATION REINFORCEMENT AND ANCHOR ROD TEMPLATES NOT SHOWN FOR CLARITY.






NOTES:

FURNISH AND INSTALL CONCRETE SURROUND AT SPECIFIED LOCATIONS SHOWN ON THE PLAN.

USE CONCRETE MIX NO. 3F52.

① ENSURE SURROUND IS FLUSH WITH TOP OF FOUNDATION EXCEPT WHEN USING HIGH-TOP FOUNDATIONS.

| | | | | | | |
|--|---|--|--------------|---------------------------|----------------------------|--------|
| | LEAD EXPERT OFFICE BRIAN SORENSON STATE TRAFFIC ENGINEER OFFICE OF TRAFFIC ENGINEERING | LIGHT FOUNDATION CONCRETE SURROUND DETAILS | NOT APPROVED | STATE DESIGN ENGINEER | STANDARD PLAN 5-297.843 | 1 OF 1 |
| | STATE PROJ. NO. TRUNK HWY. | | | SHEET NO. TOTAL SHEETS | | |

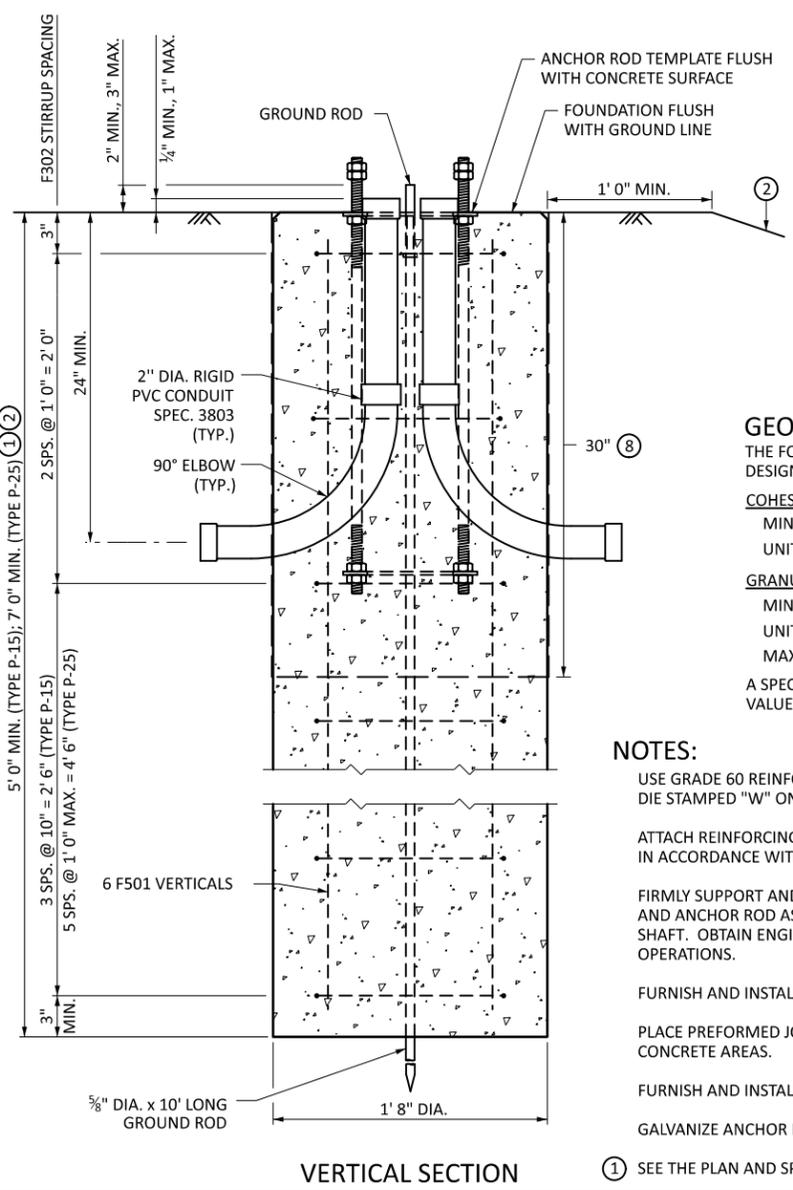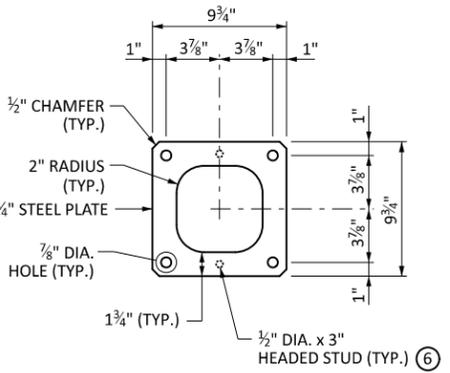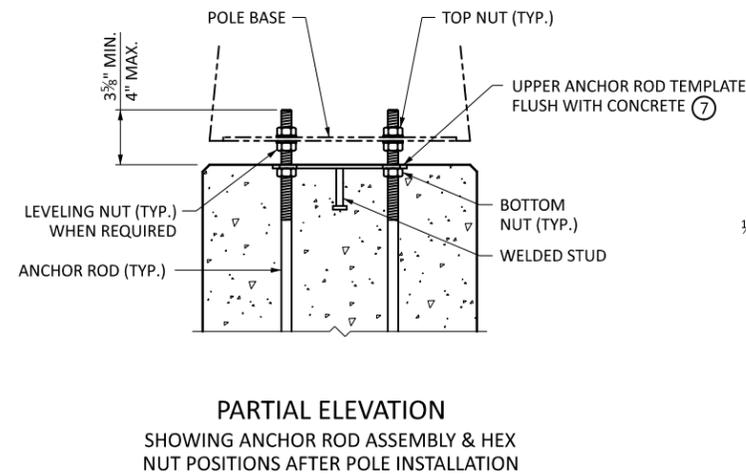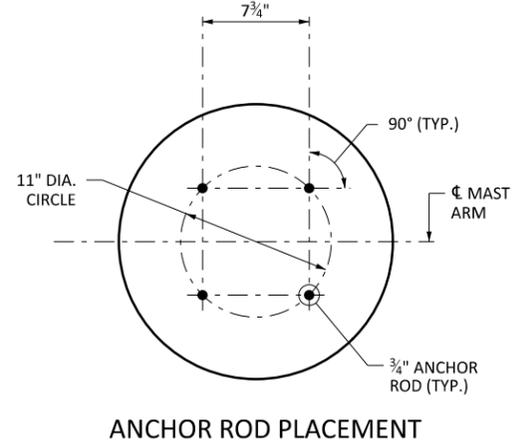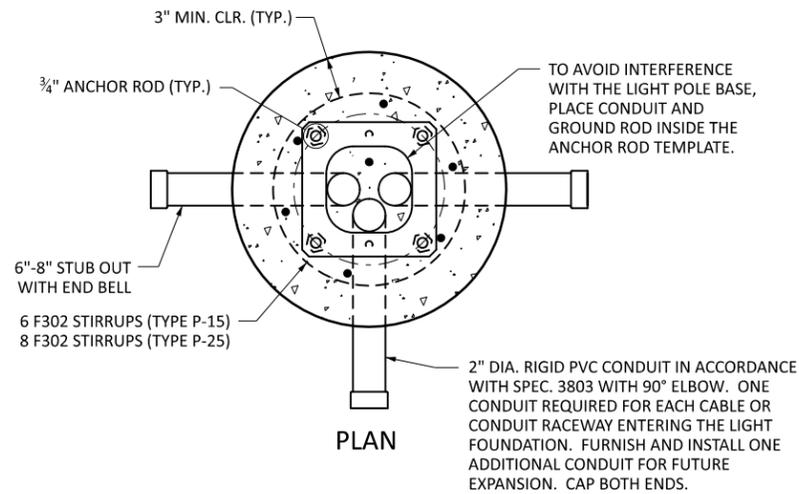

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE P-15 FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 2.0 SQUARE FEET.

TYPE P-25 FOUNDATION - THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.



GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

- NOTES:**
- USE GRADE 60 REINFORCEMENT BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
 - ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.
 - FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
 - FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
 - PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
 - FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
 - GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
 - SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.

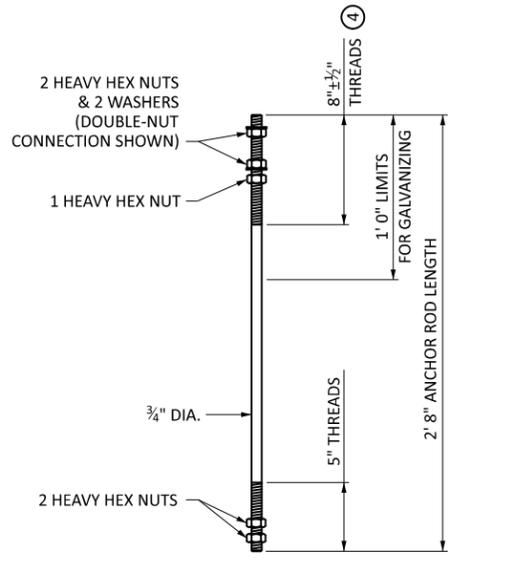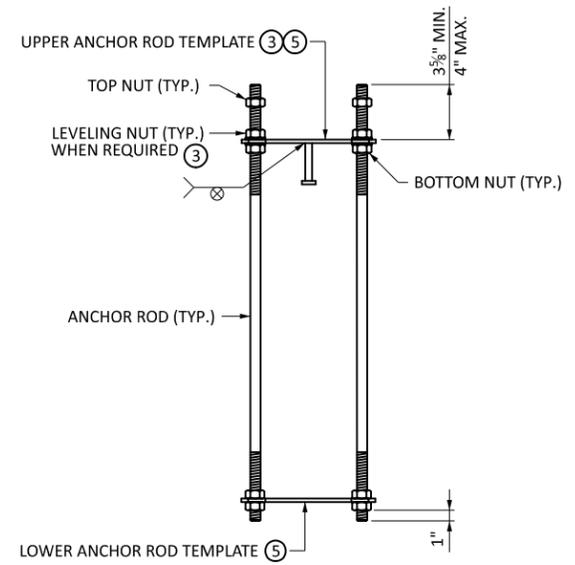


- IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- FURNISH AND INSTALL A MAXIMUM 30" LONG CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION. DO NOT USE A FULL-LENGTH FORMING TUBE.


BILL OF REINFORCEMENT - TYPE P-15

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 4' 6" | — | SHAFT VERTICALS |
| F302 | 6 | 4' 3" | TIES | SHAFT TIES |

BILL OF REINFORCEMENT - TYPE P-25

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 6' 6" | — | SHAFT VERTICALS |
| F302 | 8 | 4' 3" | TIES | SHAFT TIES |

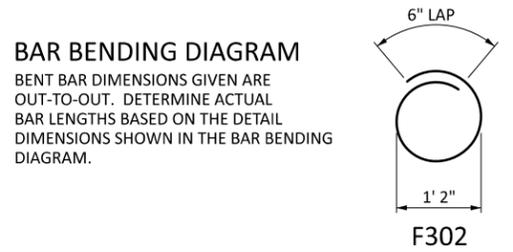

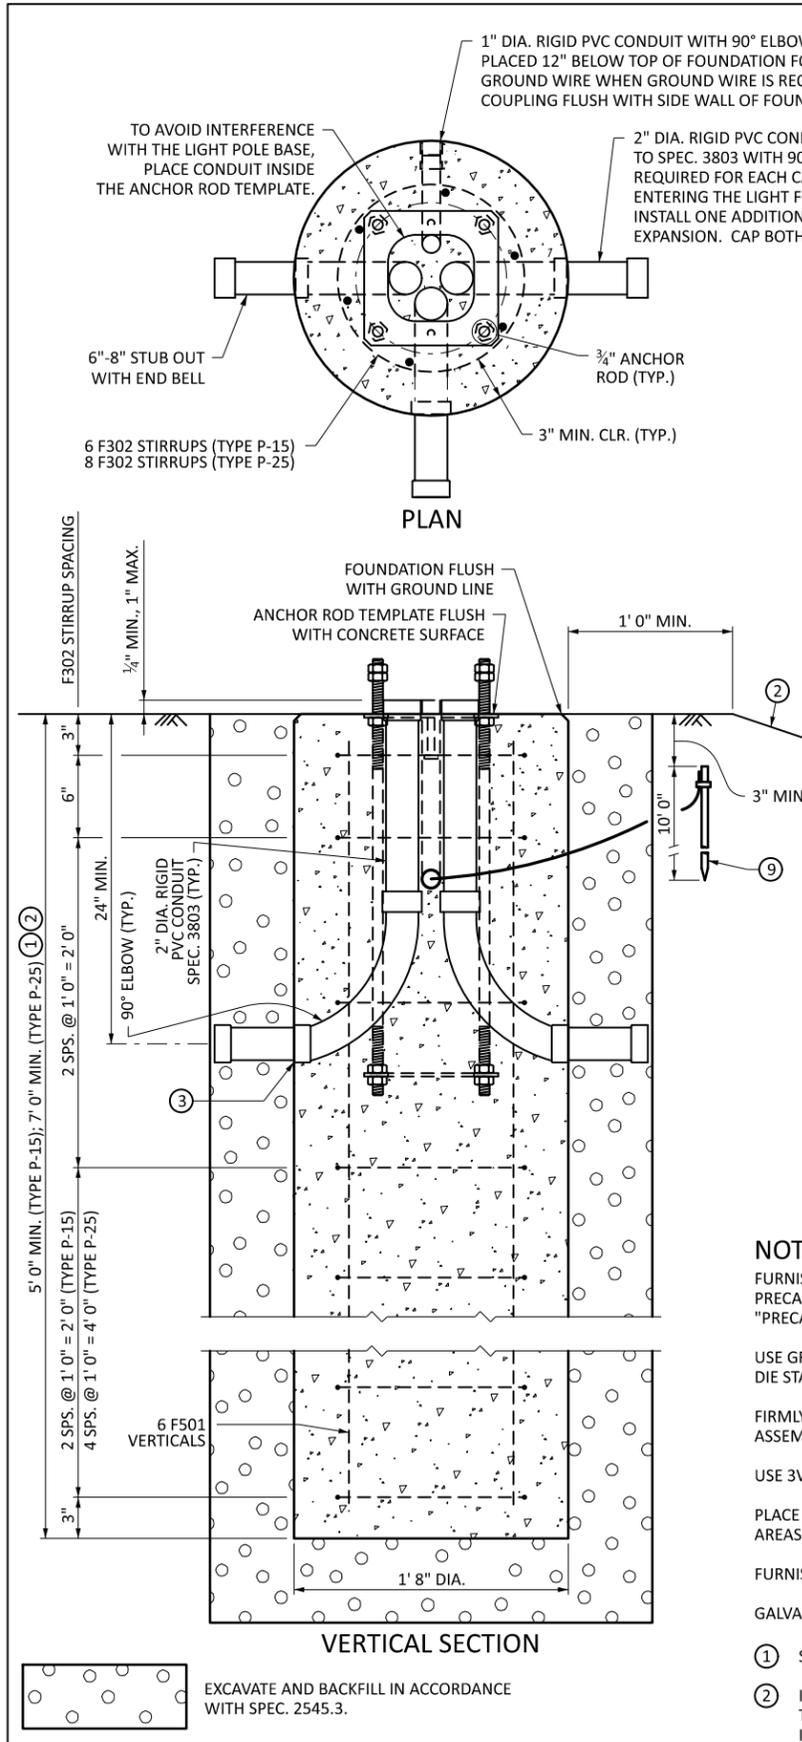

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE P-15 FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 2.0 SQUARE FEET.

TYPE P-25 FOUNDATION - THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:






THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:**
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:**
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

- FURNISH AND INSTALL PRECAST CONCRETE LIGHT FOUNDATIONS MANUFACTURED IN A PRECAST CONCRETE MANUFACTURING PLANT IN ACCORDANCE WITH SPEC. 3238 "PRECAST CONCRETE BOX CULVERTS."
- USE GRADE 60 REINFORCEMENT BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
- FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM.
- USE 3V82 CONCRETE MIX.
- PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
- FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
- GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
- SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
 - IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

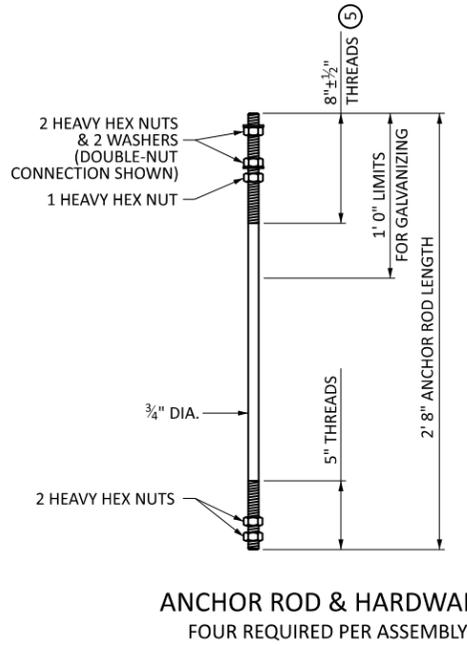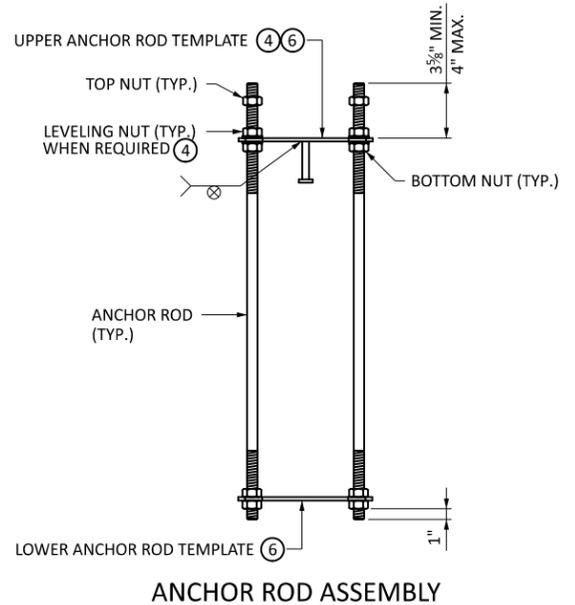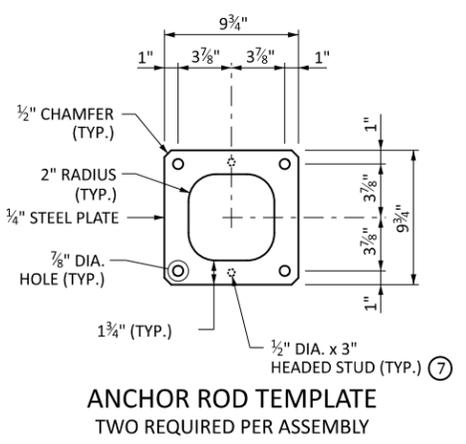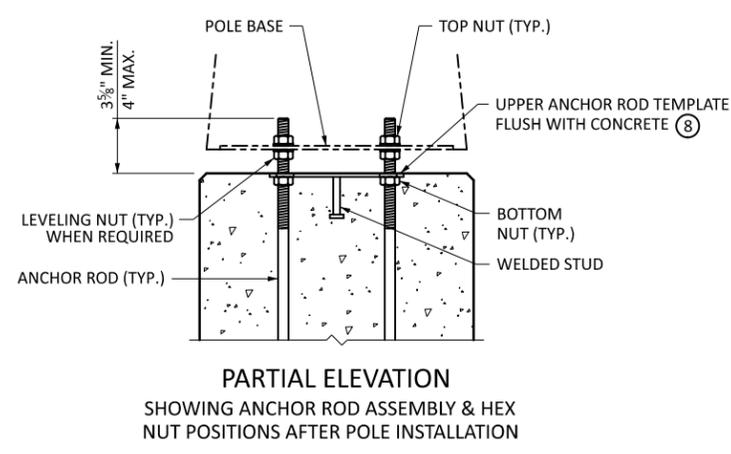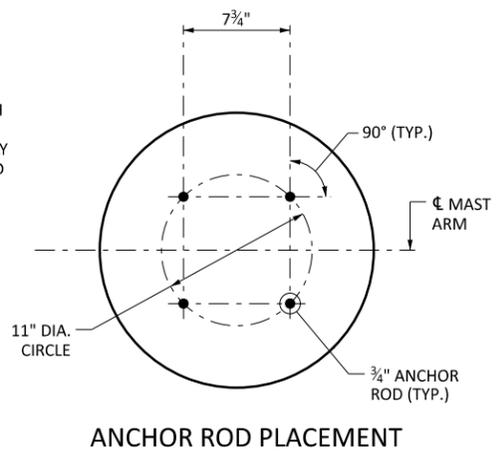


BILL OF REINFORCEMENT - TYPE P-15

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 4' 6" | — | SHAFT VERTICALS |
| F302 | 6 | 4' 3" | TIES | SHAFT TIES |


BILL OF REINFORCEMENT - TYPE P-25

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 6' 6" | — | SHAFT VERTICALS |
| F302 | 8 | 4' 3" | TIES | SHAFT TIES |


BAR BENDING DIAGRAM
 BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.




STANDARD PLAN

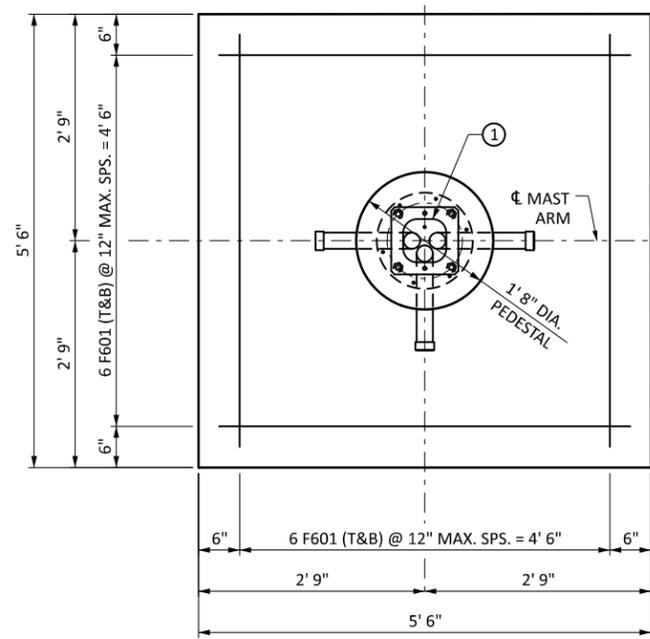


SPREAD FOOTING PLAN

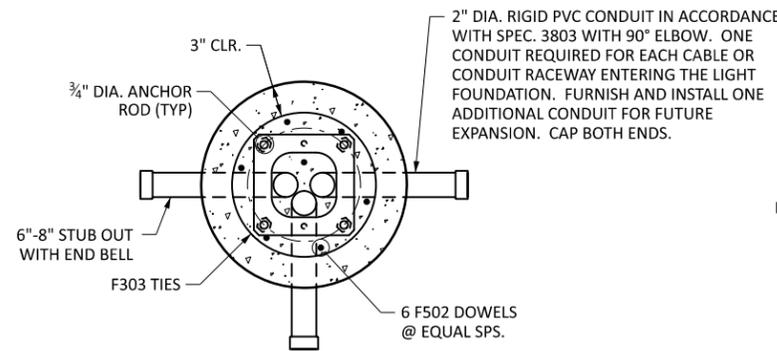


PEDESTAL PLAN

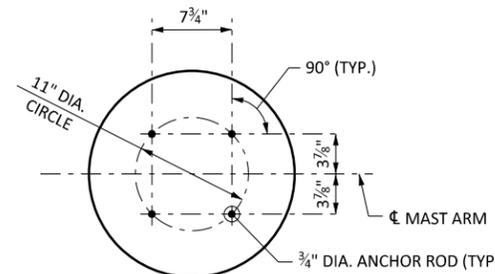


ANCHOR ROD PLACEMENT

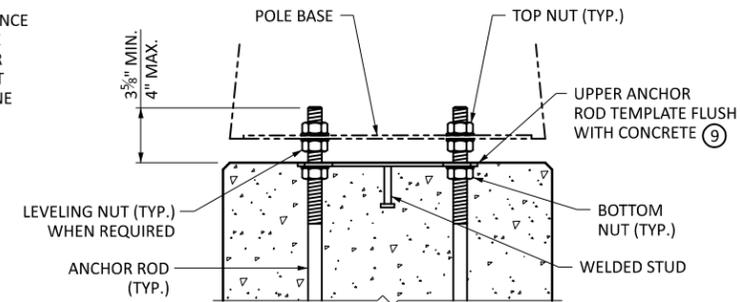


PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

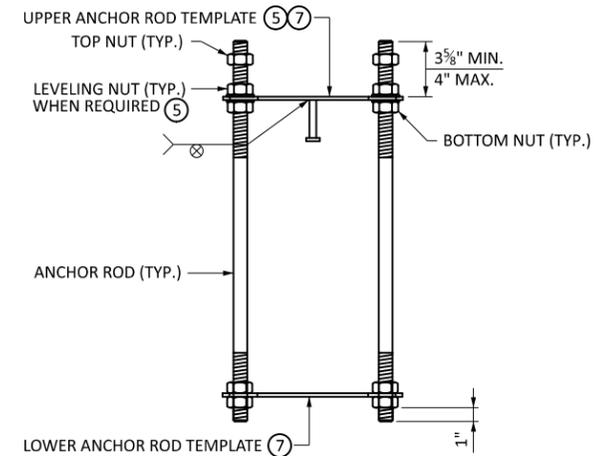

ANCHOR ROD ASSEMBLY

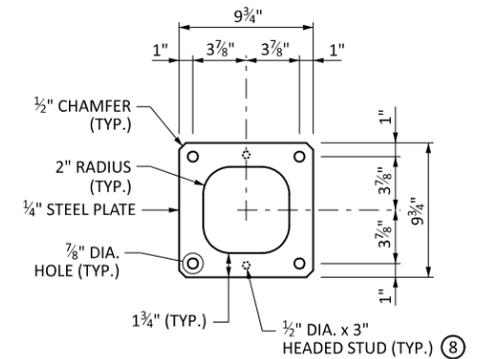

ANCHOR ROD TEMPLATE
TWO REQUIRED PER ASSEMBLY

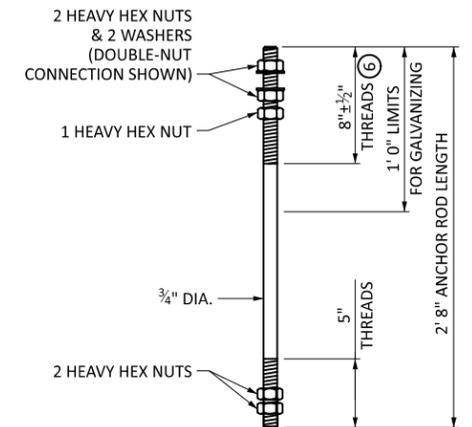

ANCHOR ROD & HARDWARE
FOUR REQUIRED PER ASSEMBLY

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.

THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

SANDY SOILS
UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°

CLAY SOILS
UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|-----------|-------------------------|-------------------------------|
| SERVICE | 4.64 | 0.95 |
| STRENGTH | 3.26 | 1.72 |

NOTES:

REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

(T&B) DENOTES TOP AND BOTTOM.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.



PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

- TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT AND GROUND ROD INSIDE THE ANCHOR ROD TEMPLATE.
- PLACE THE BOTTOM OF FOOTING 5 FEET BELOW THE PROPOSED GROUNDLINE.
- ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
- 5/8" DIAMETER x 10-FOOT-LONG GROUND ROD.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 24 | 5' 0" | — | FOOTING REINFORCEMENT |
| F502 | 6 | 5' 3" | — | FOOTING DOWELS |
| F303 | 5 | 4' 2" | — | PEDESTAL TIES |

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

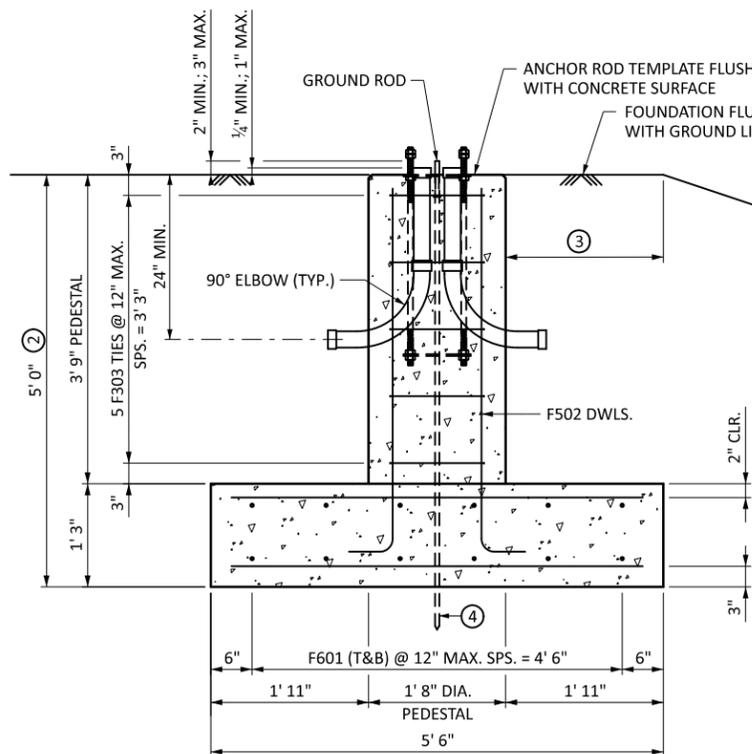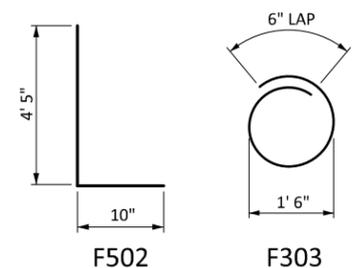

SPREAD FOOTING ELEVATION

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN P
SPREAD FOOTING
25' POLE OR LESS

NOT APPROVED

STANDARD PLAN
5-297.844

3 OF 6



STANDARD PLAN






STATE DESIGN ENGINEER

STATE PROJ. NO.

TRUNK HWY.

SHEET NO.

TOTAL SHEETS

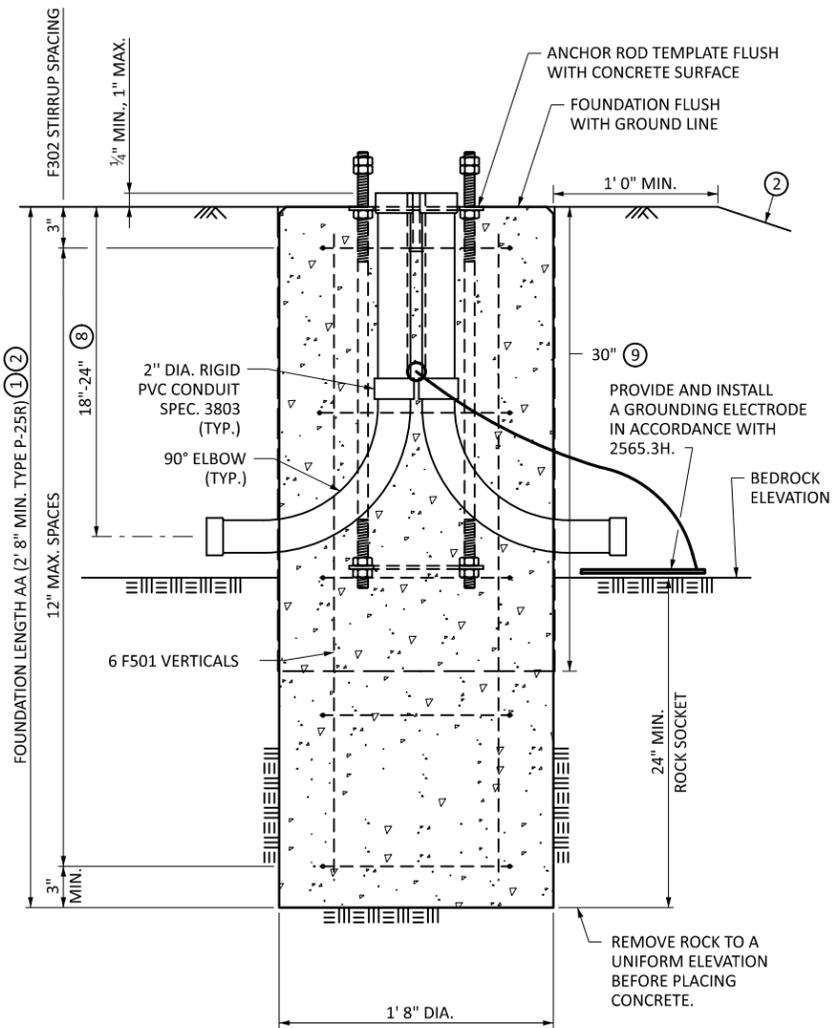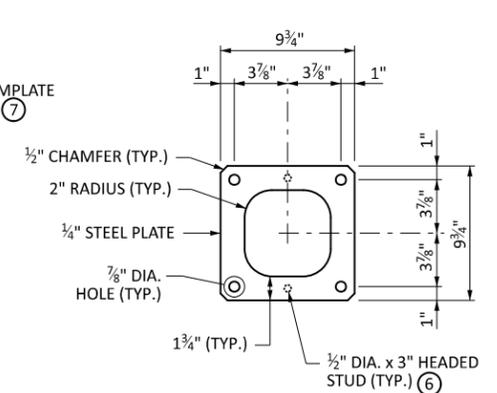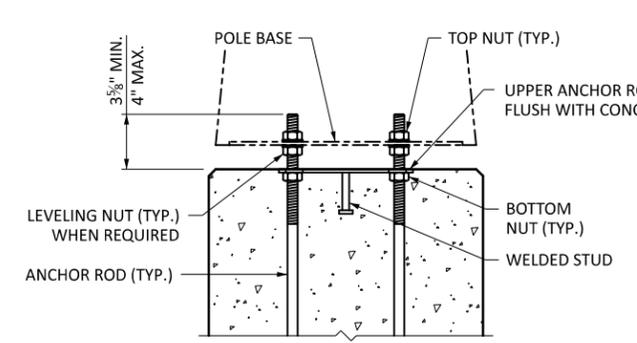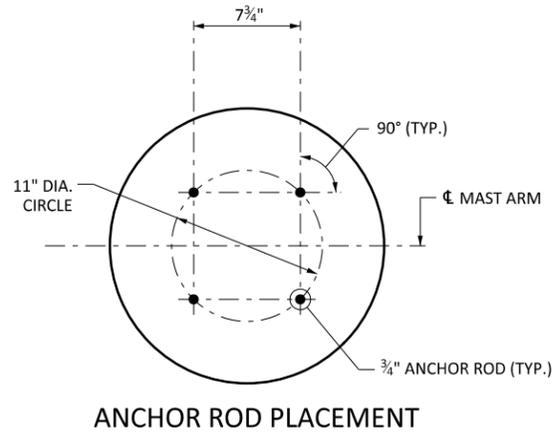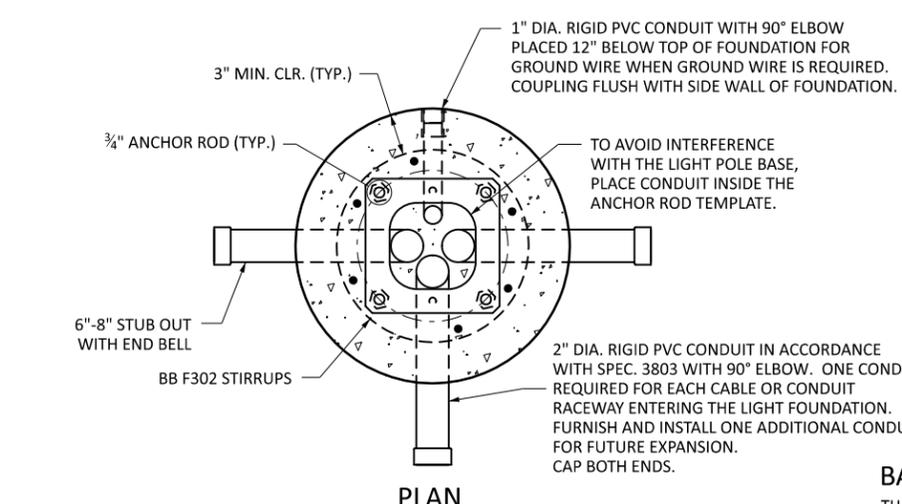

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE P-25R FOUNDATION - THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:**
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:**
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

- BEDROCK:**
 MIN. UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
 MIN. ROCK QUALITY DESIGNATION (RQD): 50%
 MIN. JOINT CONDITION RATING (JCOND₉₉): 20


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:


- SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
- IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.
- USE GRADE 60 REINFORCEMENT BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
- ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.
- FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
- FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
- PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
- FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
- GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

ANCHOR ROD TEMPLATE
TWO REQUIRED PER ASSEMBLY

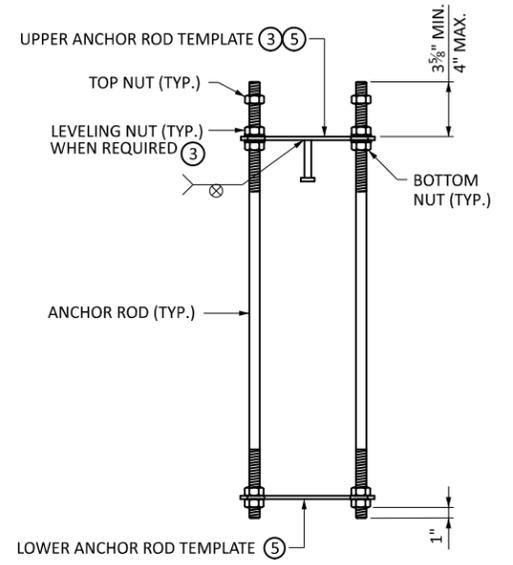

ANCHOR ROD ASSEMBLY

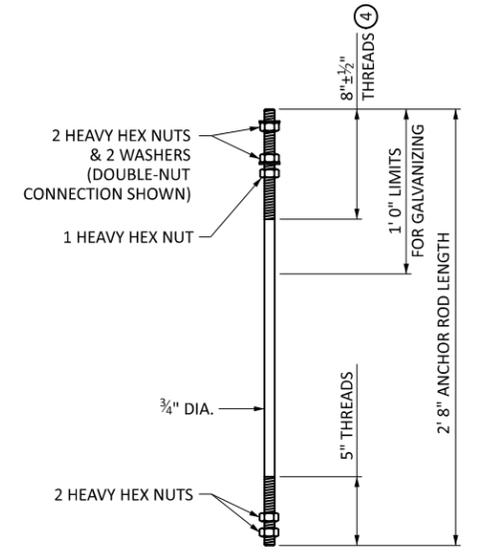


ANCHOR ROD & HARDWARE
FOUR REQUIRED PER ASSEMBLY

| BILL OF REINFORCEMENT - TYPE P-25R | | | | |
|------------------------------------|------|---------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F501 | 6 | AA - 6' | — | SHAFT VERTICALS |
| F302 | BB | 4' 3" | TIES | SHAFT TIES |

TO DETERMINE THE NUMBER OF F302 STIRRUPS REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF FOUNDATION, AA, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.

BAR BENDING DIAGRAM

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.



LEAD EXPERT OFFICE
 BRIAN SORENSON
 STATE TRAFFIC ENGINEER
 OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN P
 CAST-IN-PLACE DRILLED SHAFT IN ROCK
 P-25R 25' POLE OR LESS

NOT APPROVED

STANDARD PLAN
 5-297.844


4 OF 6




STANDARD PLAN

STATE DESIGN ENGINEER
 STATE PROJ. NO.
 TRUNK HWY.

SHEET NO.
 TOTAL SHEETS

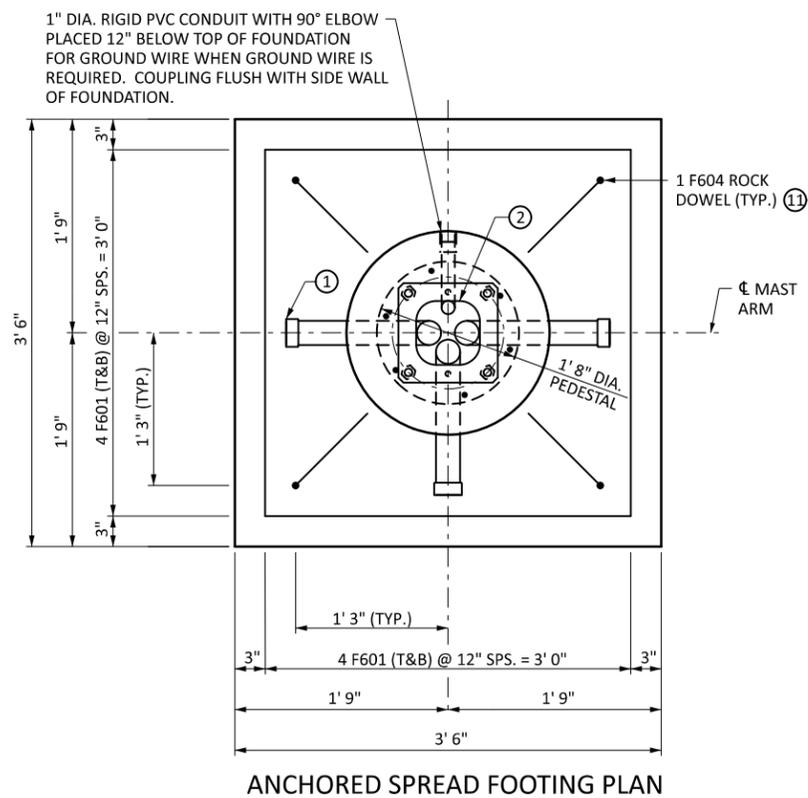


ANCHORED SPREAD FOOTING PLAN

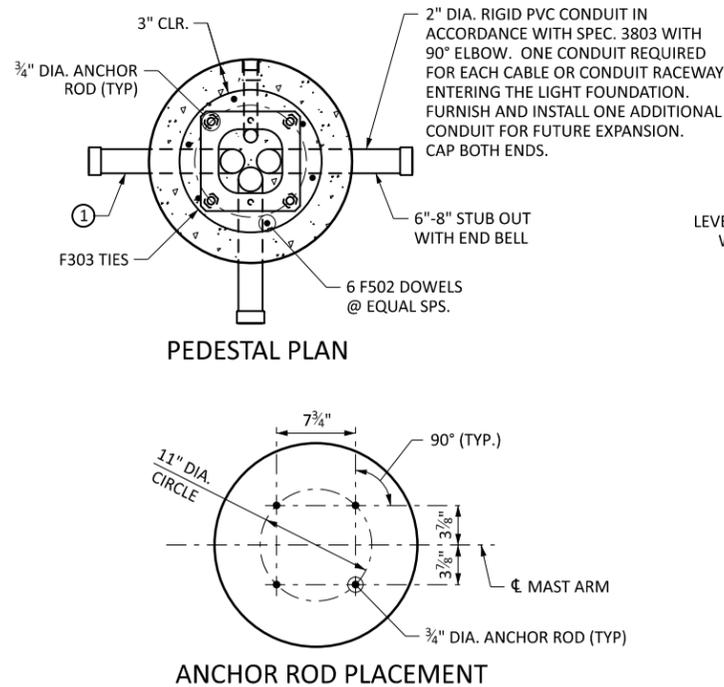


PEDESTAL PLAN

ANCHOR ROD PLACEMENT

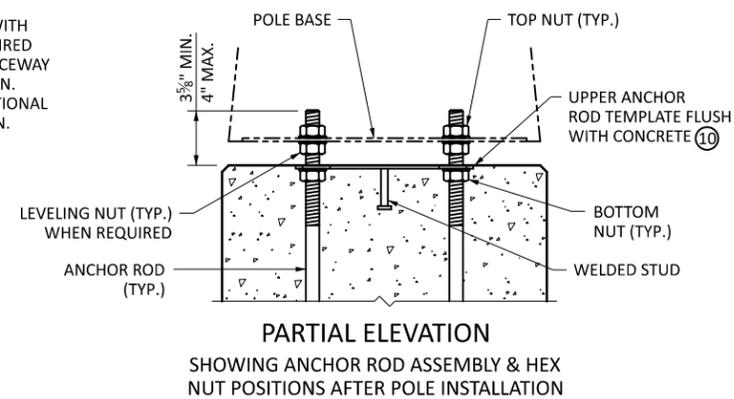


PARTIAL ELEVATION


SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

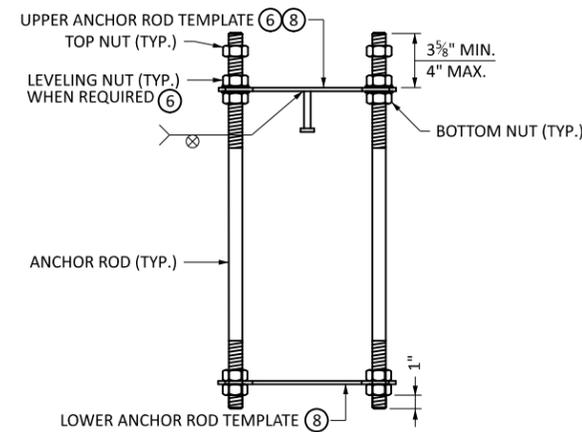

ANCHOR ROD ASSEMBLY

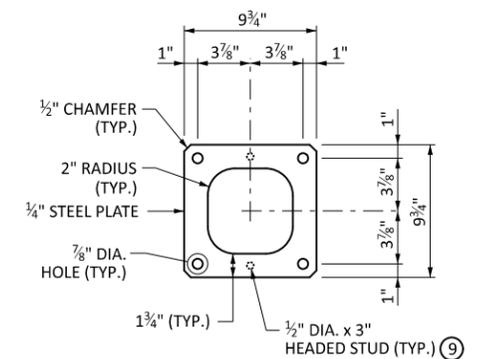

ANCHOR ROD TEMPLATE
TWO REQUIRED PER ASSEMBLY

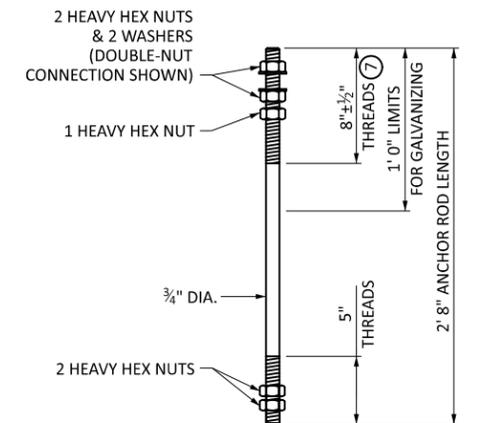

ANCHOR ROD & HARDWARE
FOUR REQUIRED PER ASSEMBLY

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF ROCK USED IN DESIGN IS 10 KSF.

THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

SANDY SOILS
UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°

CLAY SOILS
UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°

BEDROCK:
UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
ROCK QUALITY DESIGNATION (RQD): 50%
JOINT CONDITION RATING (JCOND₉₉): 20

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

(T&B) DENOTES TOP AND BOTTOM.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.


- ① EXTEND CONDUITS THROUGH FOOTING WHEN NECESSARY TO MAINTAIN 18-INCH TO 24-INCH EMBEDMENT.
- ② TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT INSIDE THE ANCHOR ROD TEMPLATE.
- ③ ENSURE BOTTOM OF FOOTING IS SUPPORTED ON COMPETENT BEDROCK.
- ④ ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
- ⑤ PROVIDE AND INSTALL A GROUNDING ELECTRODE IN ACCORDANCE WITH 2565.3H.
- ⑥ FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- ⑦ PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- ⑧ TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- ⑨ FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- ⑩ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- ⑪ PLACE ROCK DOWEL IN 3-INCH-DIAMETER HOLE AND ANCHOR USING AN APPROVED NON-SHRINK GROUT FOUND ON MnDOT'S APL UNDER CONCRETE PRODUCTS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|------------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 16 | 3' 0" | — | FOOTING REINFORCEMENT |
| F502 | 6 | BB + 1' 7" | — | FOOTING DOWELS |
| F303 | CC | 4' 2" | — | PEDESTAL TIES |
| F604 | 4 | 4' 11" | — | ROCK DOWELS |

TO DETERMINE THE NUMBER OF F403 TIES REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF PEDESTAL, BB, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.


BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

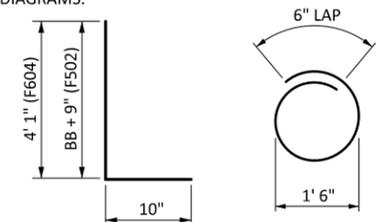

F502 & F604

F303

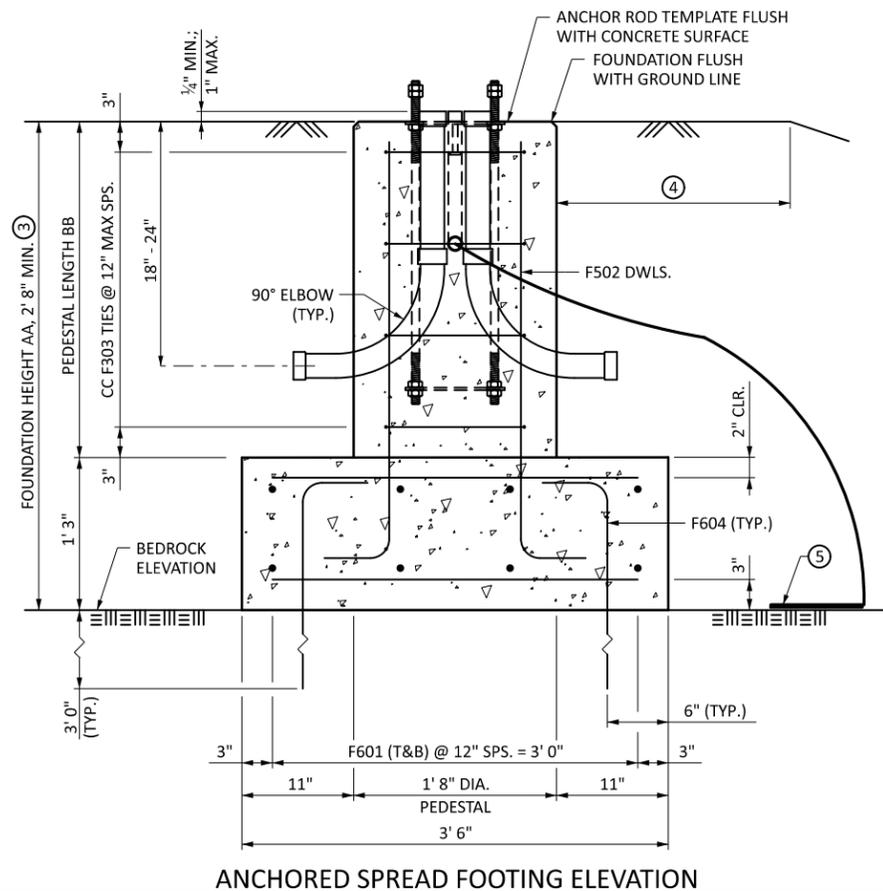

ANCHORED SPREAD FOOTING ELEVATION

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN P
ANCHORED SPREAD FOOTING ON ROCK
P-25A 25' POLE OR LESS

NOT APPROVED

STANDARD PLAN
5-297.844

5 OF 6










STANDARD PLAN

STATE PROJ. NO.

TRUNK HWY.

SHEET NO.

TOTAL SHEETS

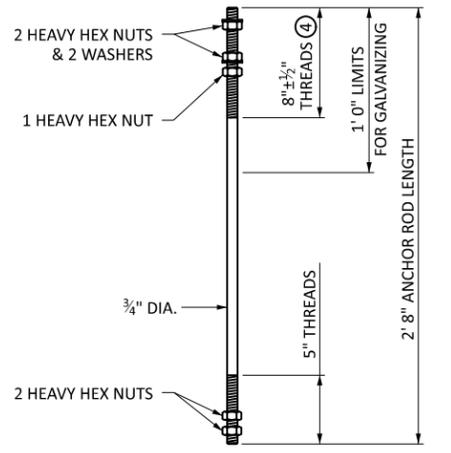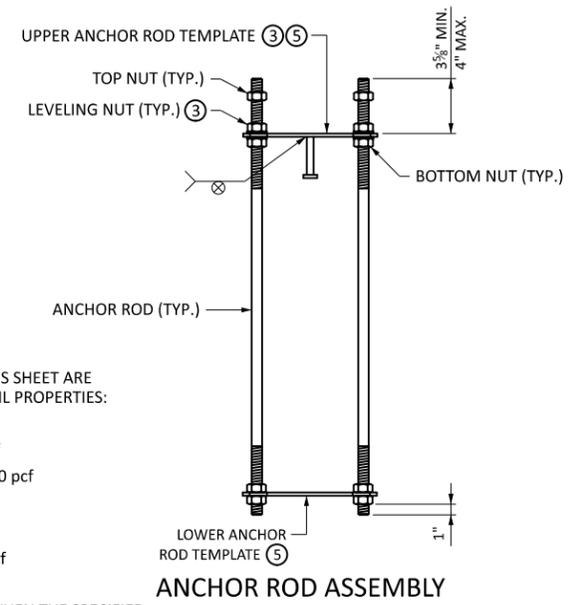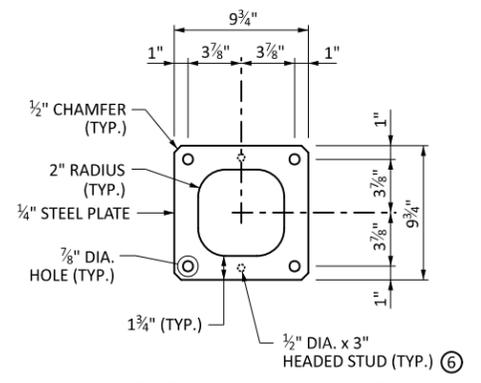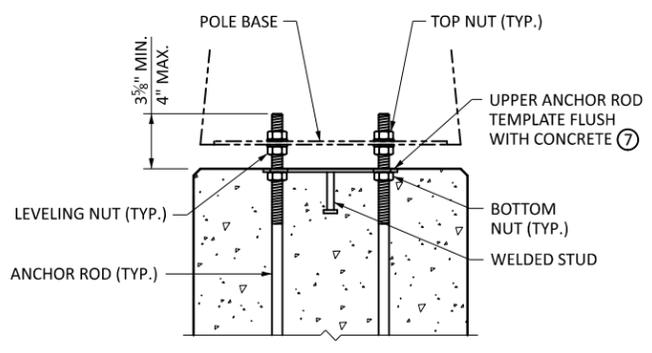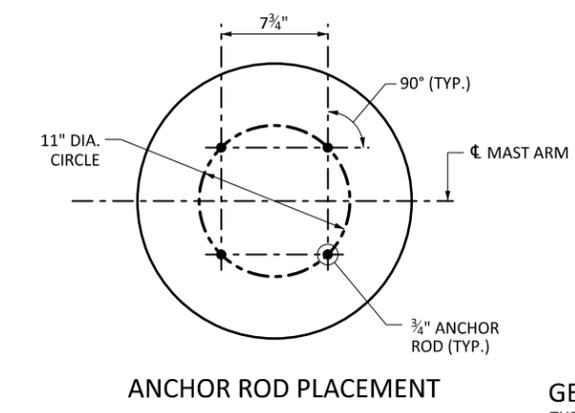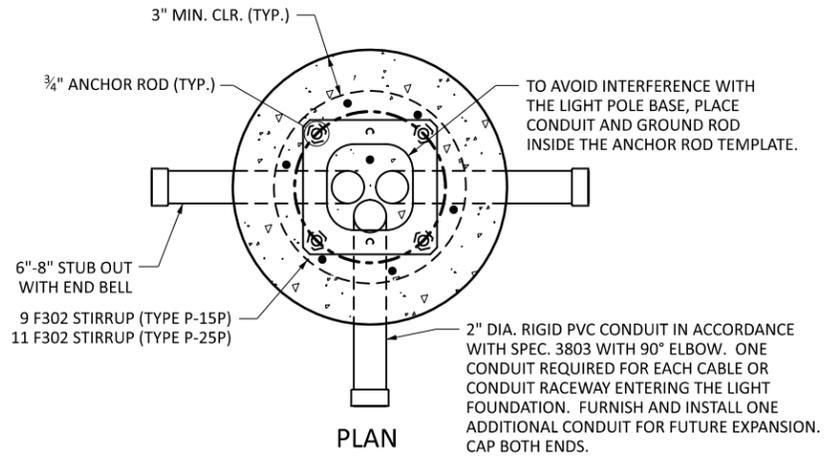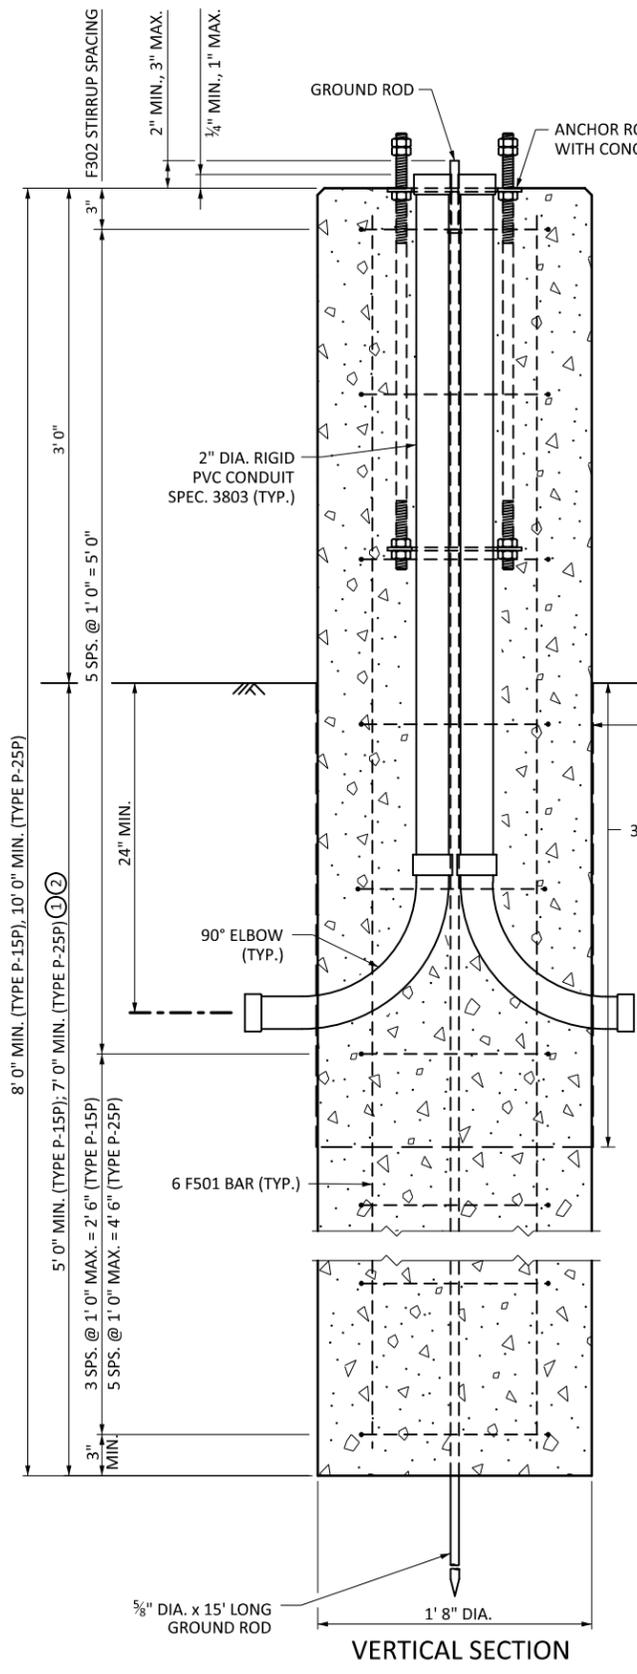

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE P-15P FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 2.0 SQUARE FEET.

TYPE P-25P FOUNDATION - THE DESIGN CONFIGURATION IS 25 FEET TALL WITH 9-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

NOTES:

- USE GRADE 60 REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
- ATTACH REINFORCING BARS BY TYING, WELDING, OR A COMBINATION THEREOF. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.
- FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
- FURNISH AND INSTALL 3652 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
- PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
- FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
- GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

GEOTECHNICAL PARAMETERS:

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:

- MIN. SHEAR STRENGTH: C = 1.0 ksf
- UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:

- MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
- UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
- MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

- SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
- IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.
- USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2.D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MNDOT'S APL UNDER BRIDGE PRODUCTS.
- FURNISH AND INSTALL A CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION AND A MAXIMUM 30" BELOW FINISHED GRADE. REMOVE THE PORTION OF THE FORMING TUBE ABOVE THE FINISHED GRADE AFTER PLACING THE POLE.


BILL OF REINFORCEMENT - TYPE P-15P

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 7' 8" | — | SHAFT VERTICALS |
| F302 | 9 | 4' 3" | TIES | SHAFT TIES |

BILL OF REINFORCEMENT - TYPE P-25P

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F501 | 6 | 9' 8" | — | SHAFT VERTICALS |
| F302 | 11 | 4' 3" | TIES | SHAFT TIES |

BAR BENDING DIAGRAM

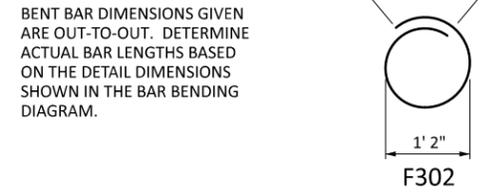

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

HIGH-TOP LIGHT FOUNDATION - DESIGN P
CAST-IN-PLACE DRILLED SHAFT
P-15P 15' POLE OR LESS
P-25P 25' POLE OR LESS






NOT APPROVED

STANDARD PLAN
5-297.844
6 OF 6



STANDARD PLAN

STATE DESIGN ENGINEER
STATE PROJ. NO.
TRUNK HWY.
SHEET NO.
TOTAL SHEETS

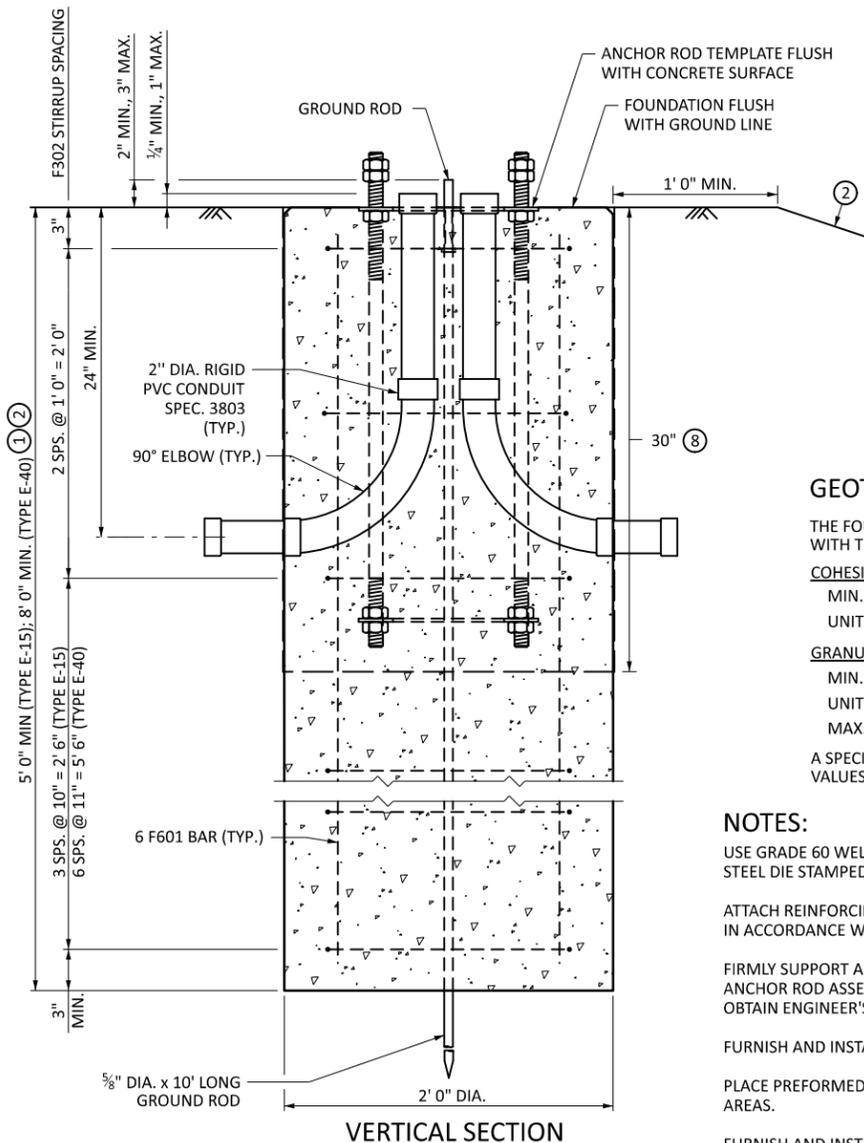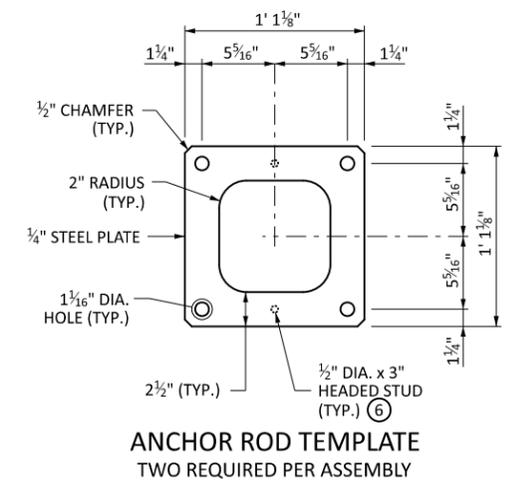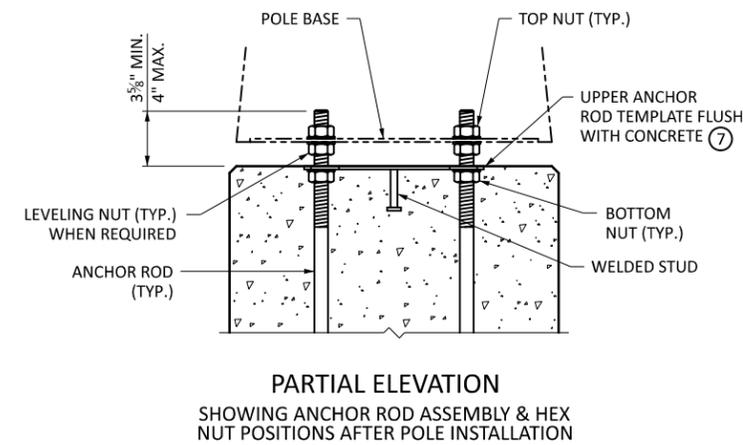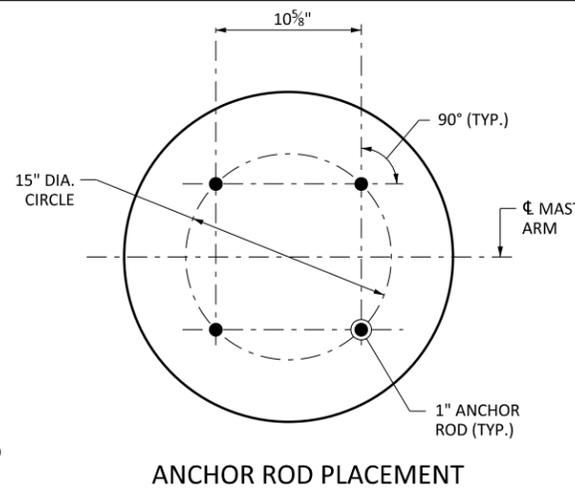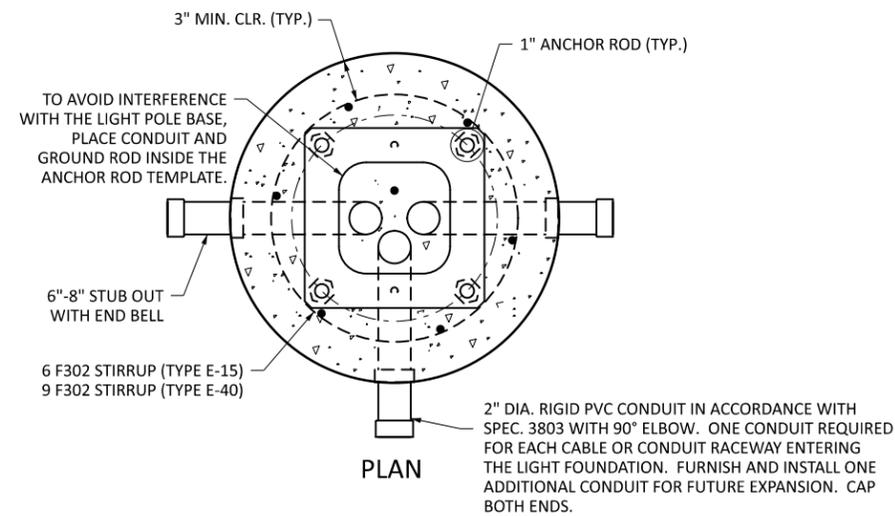

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE E-15 FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.50 SQUARE FEET.

TYPE E-40 FOUNDATION - THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:**
- MIN. SHEAR STRENGTH: C = 1.0 ksf
 - UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:**
- MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 - UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 - MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.

ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.



FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

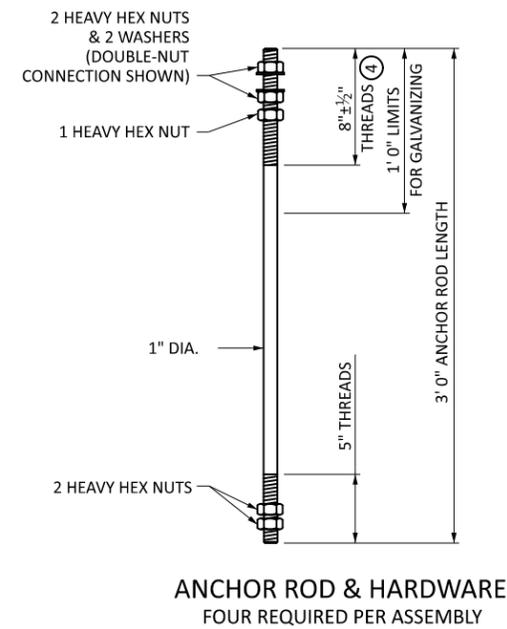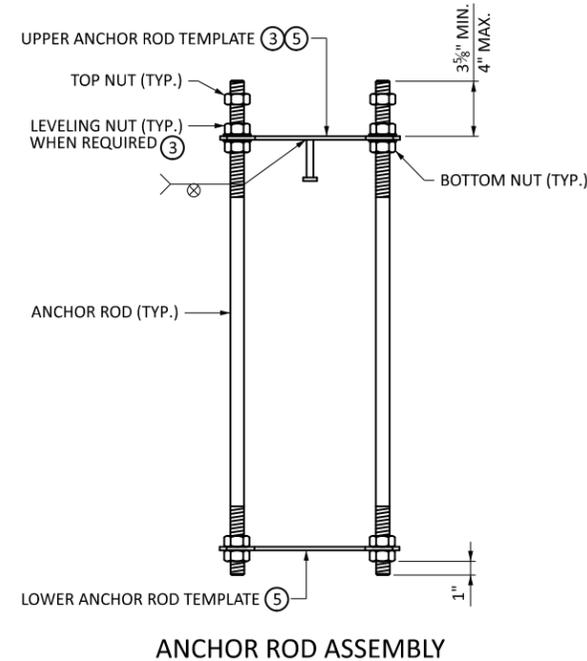

BILL OF REINFORCEMENT - TYPE E-15


| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F601 | 6 | 4' 6" | — | SHAFT VERTICALS |
| F302 | 6 | 5' 3" | TIES | SHAFT TIES |

BILL OF REINFORCEMENT - TYPE E-40

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F601 | 6 | 7' 6" | — | SHAFT VERTICALS |
| F302 | 9 | 5' 3" | TIES | SHAFT TIES |

BAR BENDING DIAGRAM

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.








- SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
- IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- FURNISH AND INSTALL A MAXIMUM 30" LONG CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION. DO NOT USE A FULL-LENGTH FORMING TUBE.

| | | | | | |
|--|---|---------------------|-----------------------|-------------------------|------------|
| <p>LEAD EXPERT OFFICE</p> <p>BRIAN SORENSON</p> <p>STATE TRAFFIC ENGINEER</p> <p>OFFICE OF TRAFFIC ENGINEERING</p> | <p>LIGHT FOUNDATION - DESIGN E</p> <p>CAST-IN-PLACE DRILLED SHAFT</p> <p>E-15 15' POLE OR LESS</p> <p>E-40 40' POLE OR LESS</p> | <p>NOT APPROVED</p> | STATE DESIGN ENGINEER | STANDARD PLAN 5-297.845 | 1 OF 6 |
| | | | STATE PROJ. NO. | SHEET NO. | TRUNK HWY. |



STANDARD PLAN

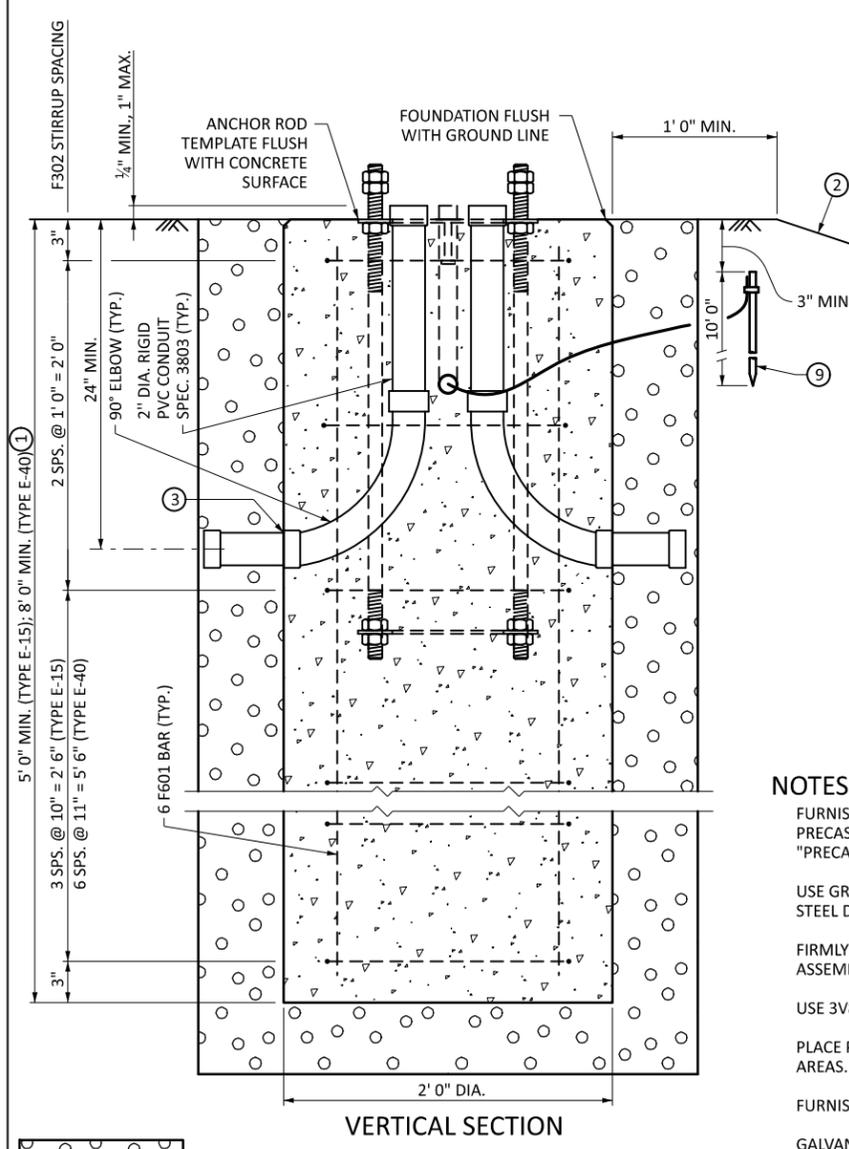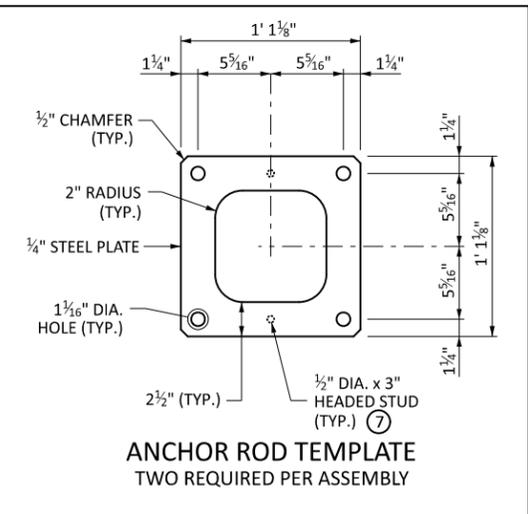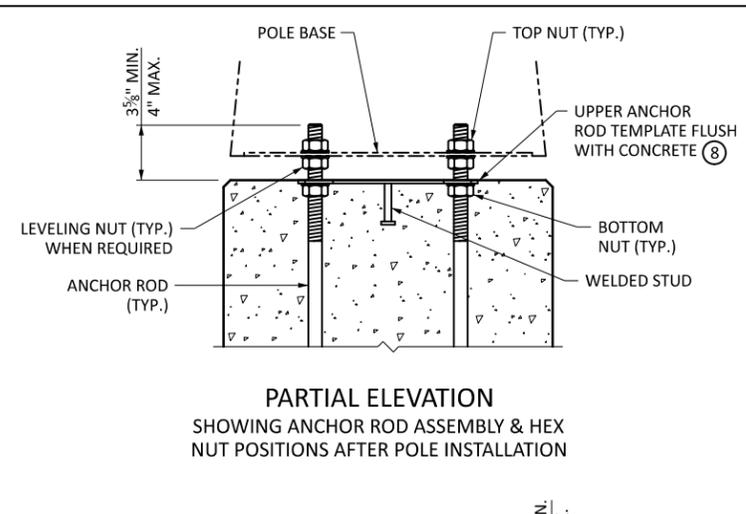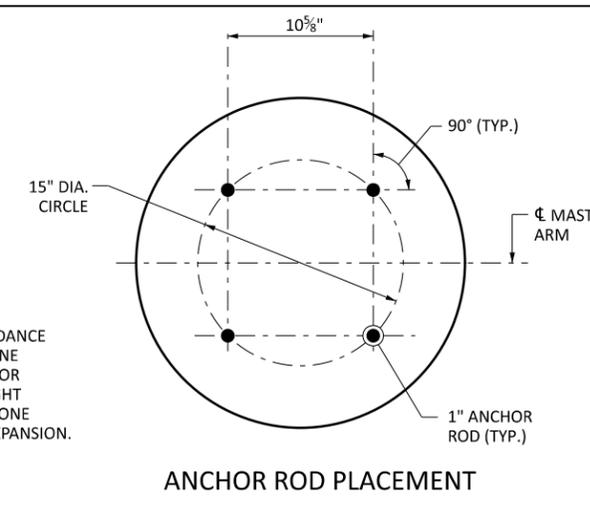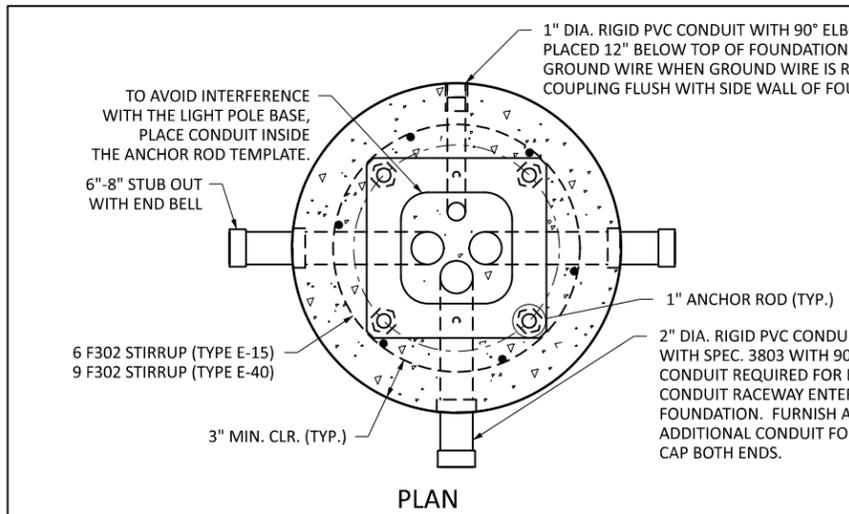

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE E-15 FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND, OCTAGONAL (8-SIDED), OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.50 SQUARE FEET.

TYPE E-40 FOUNDATION - THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:**
 MIN. SHEAR STRENGTH: $C = 1.0$ ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:**
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:
 FURNISH AND INSTALL PRECAST CONCRETE LIGHT FOUNDATIONS MANUFACTURED IN A PRECAST CONCRETE MANUFACTURING PLANT IN ACCORDANCE WITH SPEC. 3238 "PRECAST CONCRETE BOX CULVERTS."

USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM.



USE 3V82 CONCRETE MIX.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

1 SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.

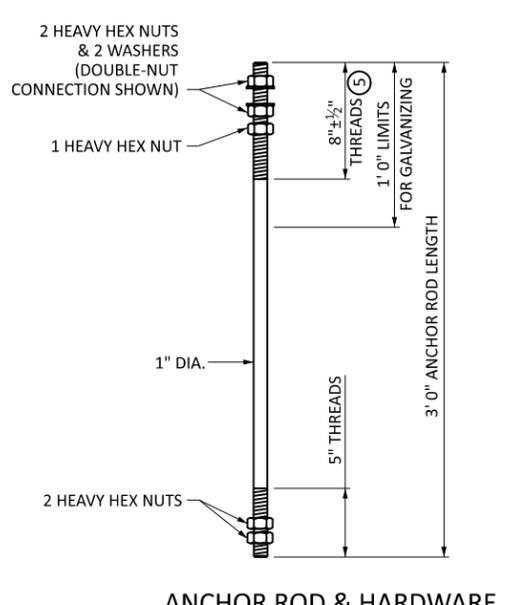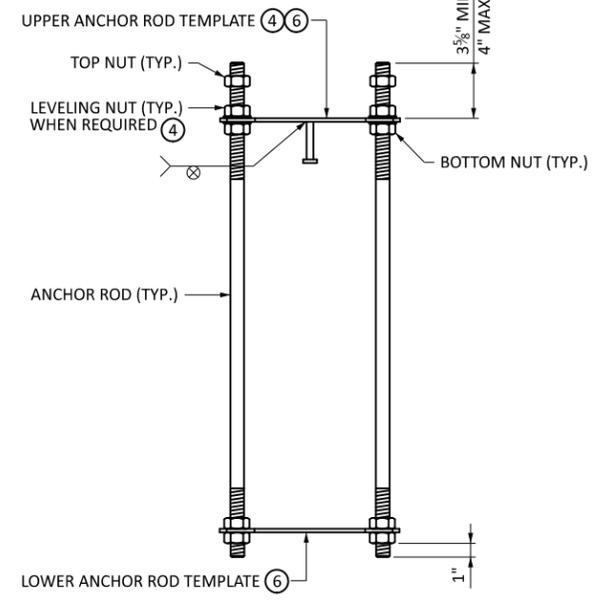


- 2 IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.
- 3 CUT AND SPLICE ELBOW AS REQUIRED TO ACCOMMODATE FORM.
- 4 FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- 5 PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- 6 TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- 7 FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- 8 REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- 9 3/8" DIA. GROUND ROD WITH CLAMP AND 6 AWG SOLID BARE COPPER WIRE. SEE PLAN FOR GROUND ROD LOCATIONS.

BILL OF REINFORCEMENT - TYPE E-15

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F601 | 6 | 4' 6" | — | SHAFT VERTICALS |
| F302 | 6 | 5' 3" | — | SHAFT TIES |

BILL OF REINFORCEMENT - TYPE E-40

| BAR | QTY. | LENGTH | SHAPE | LOCATION |
|------|------|--------|-------|-----------------|
| F601 | 6 | 7' 6" | — | SHAFT VERTICALS |
| F302 | 9 | 5' 3" | — | SHAFT TIES |

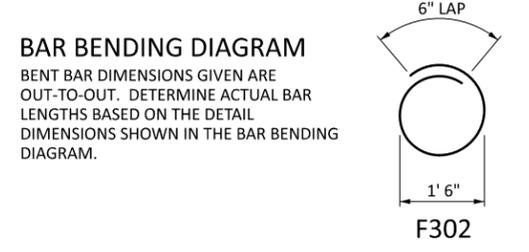

LEAD EXPERT OFFICE
 BRIAN SORENSON
 STATE TRAFFIC ENGINEER
 OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN E
 PRECAST DRILLED SHAFT
 E-15 15' POLE OR LESS
 E-40 40' POLE OR LESS


NOT APPROVED

STANDARD PLAN
 5-297.845
 2 OF 6




STANDARD PLAN


| | |
|-----------------------|--------------|
| STATE DESIGN ENGINEER | SHEET NO. |
| STATE PROJ. NO. | TOTAL SHEETS |
| TRUNK HWY. | |

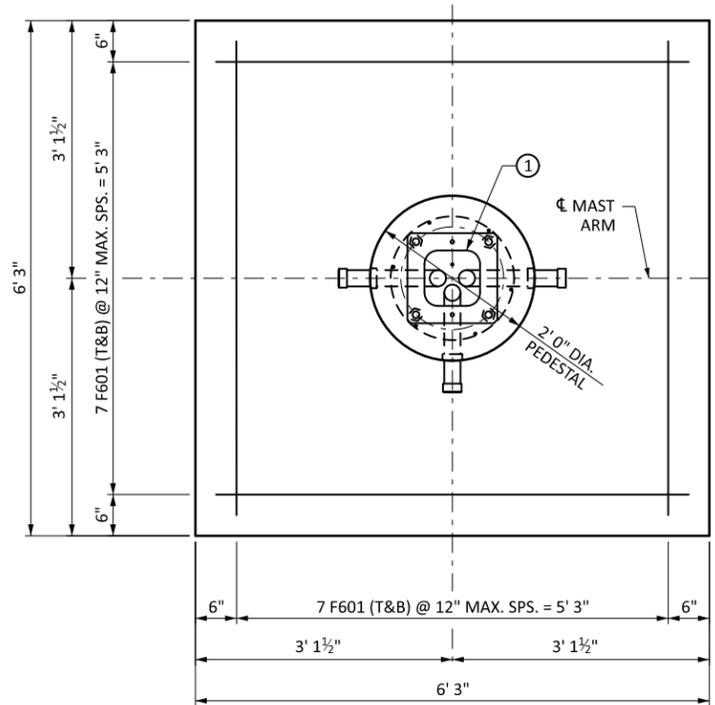


SPREAD FOOTING PLAN

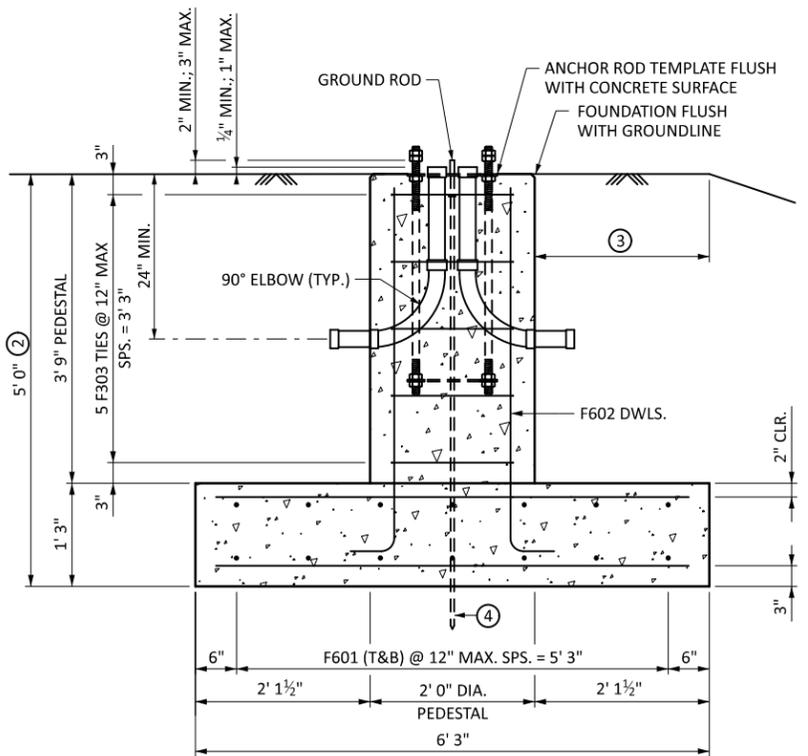

SPREAD FOOTING ELEVATION

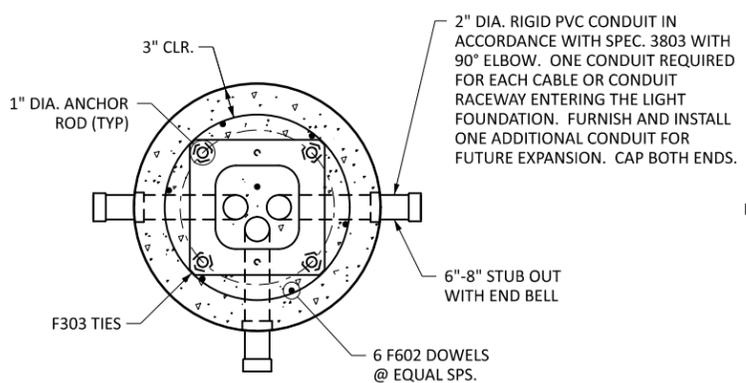

PEDESTAL PLAN

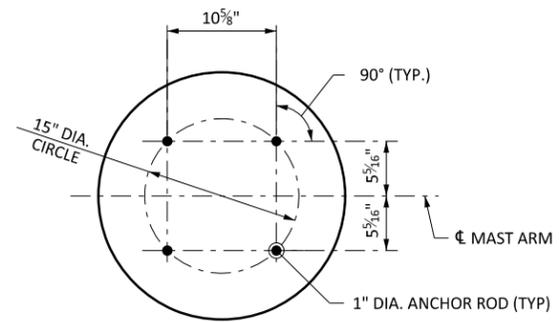

ANCHOR ROD PLACEMENT

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.


STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.


THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

- NOTES:**
- REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.
 - FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
 - FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
 - GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
 - (T&B) DENOTES TOP AND BOTTOM.
 - FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
 - PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
- ① TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT AND GROUND ROD INSIDE THE ANCHOR ROD TEMPLATE.
 - ② PLACE THE BOTTOM OF FOOTING 5 FEET BELOW THE PROPOSED GROUNDLINE.
 - ③ ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
 - ④ 5/8" DIAMETER X 10-FOOT-LONG GROUND ROD.

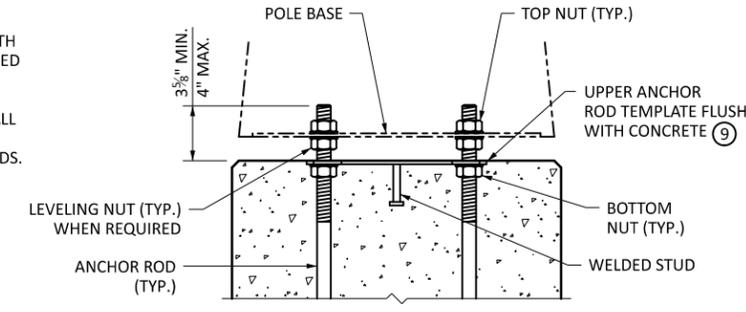

PARTIAL ELEVATION
 SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

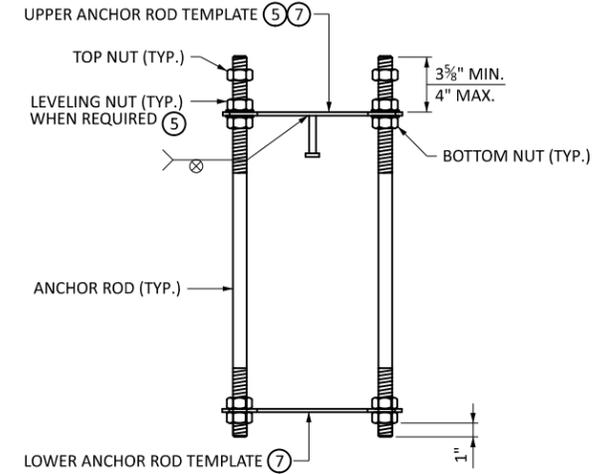

ANCHOR ROD ASSEMBLY

GEOTECHNICAL PARAMETERS:

THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.


THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

| | |
|-----------------------|--------------------------|
| SANDY SOILS | CLAY SOILS |
| UNIT WEIGHT = 125 PCF | UNIT WEIGHT = 125±10 PCF |
| FRICTION ANGLE = 30° | COHESION = 1000 PSF |
| | FRICTION ANGLE = 0° |


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|------------------|-------------------------|-------------------------------|
| SERVICE STRENGTH | 5.03 | 1.04 |
| | 3.26 | 2.24 |

- ⑤ FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- ⑥ PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- ⑦ TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- ⑧ FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- ⑨ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.

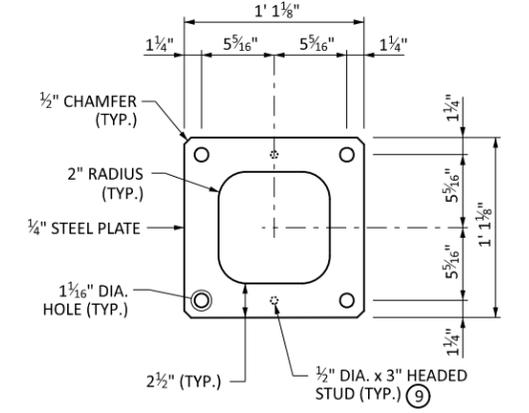

ANCHOR ROD TEMPLATE
 TWO REQUIRED PER ASSEMBLY

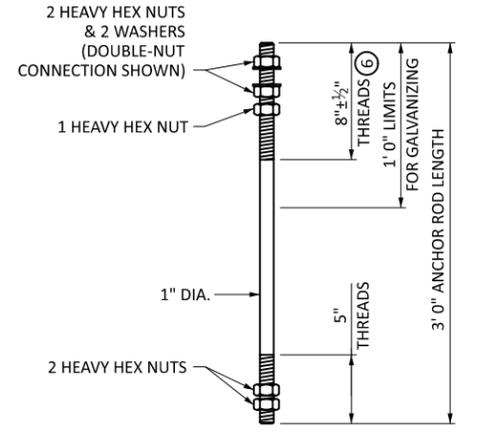







ANCHOR ROD & HARDWARE
 FOUR REQUIRED PER ASSEMBLY

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 28 | 5' 9" | — | FOOTING REINFORCEMENT |
| F602 | 6 | 5' 3" | — | FOOTING DOWELS |
| F303 | 5 | 5' 3" | — | PEDESTAL TIES |

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

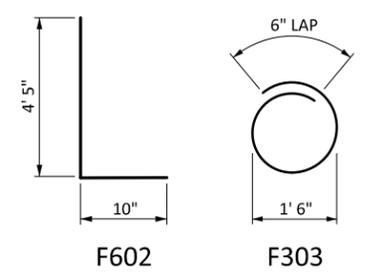

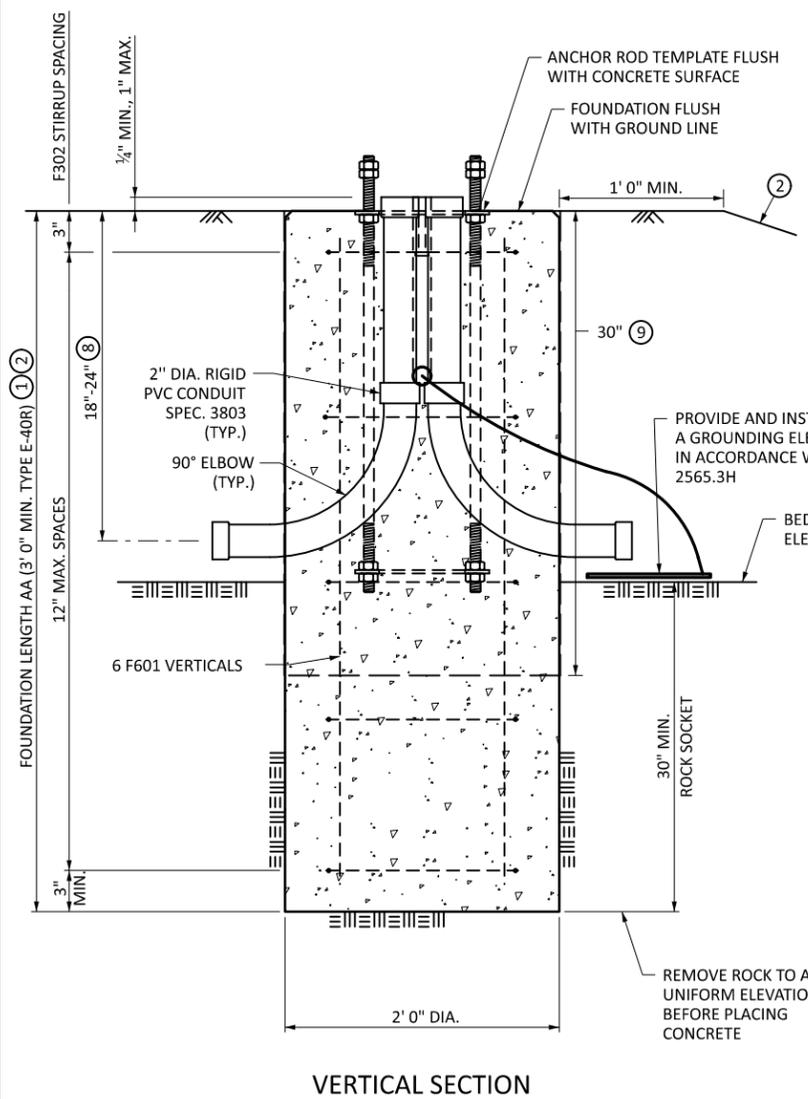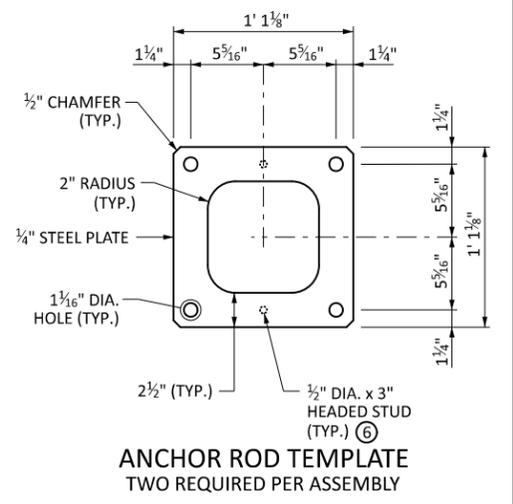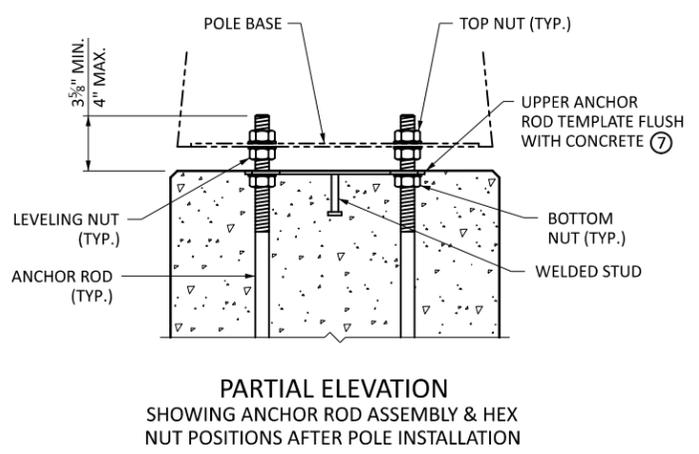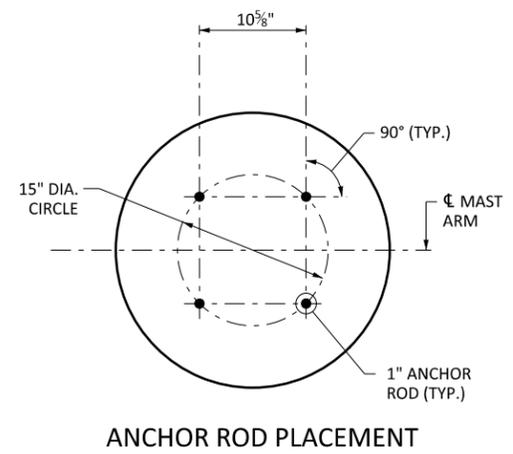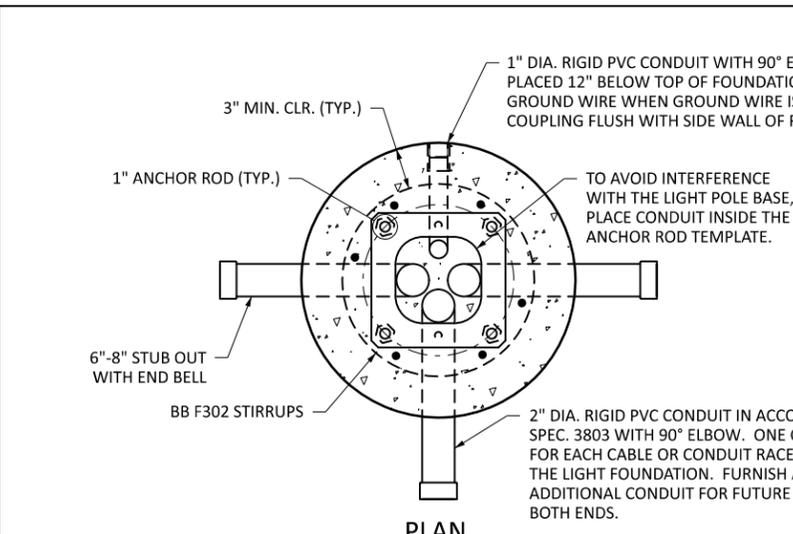

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE E-40R FOUNDATION - THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:



THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:
 - MIN. SHEAR STRENGTH: C = 1.0 ksf
 - UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:
 - MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 - UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 - MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$
- BEDROCK:
 - MIN. UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
 - MIN. ROCK QUALITY DESIGNATION (RQD): 50%
 - MIN. JOINT CONDITION RATING (JCOND_{8g}): 20

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

- 1 USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
- 2 ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.
- 3 FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
- 4 FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
- 5 PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
- 6 FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
- 7 GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
- 8 SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
- 9 IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

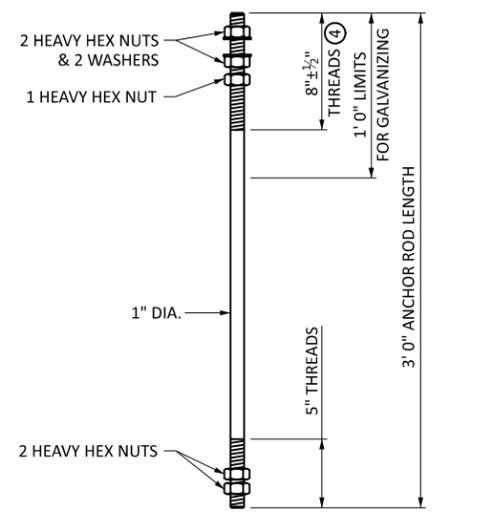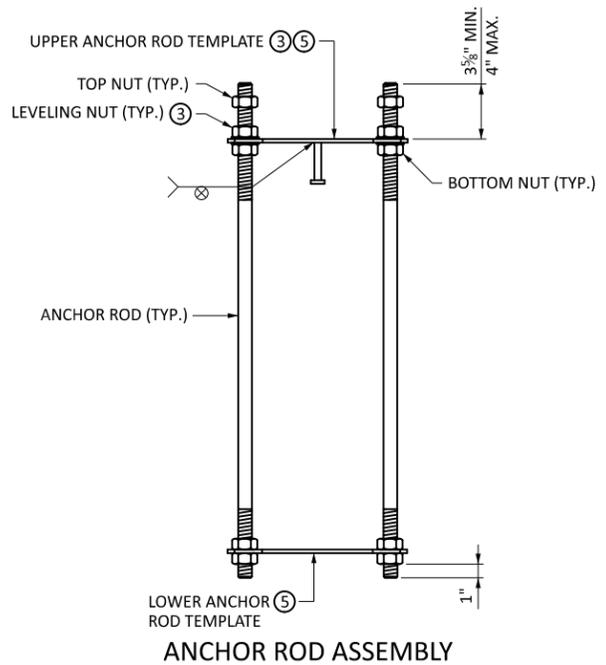


- 3 FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- 4 PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- 5 TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- 6 FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- 7 REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- 8 THE MINIMUM CONDUIT EMBEDMENT IS 18 INCHES BELOW FINISHED GRADE. SEE SPECIAL PROVISIONS IF SHALLOW BEDROCK IS ENCOUNTERED AND A REDUCED EMBEDMENT DEPTH IS REQUIRED.
- 9 FURNISH AND INSTALL A MAXIMUM 30" LONG CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION. DO NOT USE A FULL-LENGTH FORMING TUBE.

| BILL OF REINFORCEMENT - TYPE E-40R | | | | |
|------------------------------------|------|---------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 6 | AA - 6" | — | SHAFT VERTICALS |
| F302 | BB | 5' 3" | TIES | SHAFT TIES |


TO DETERMINE THE NUMBER OF F302 STIRRUPS REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF FOUNDATION, AA, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.

BAR BENDING DIAGRAM


BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.




STANDARD PLAN

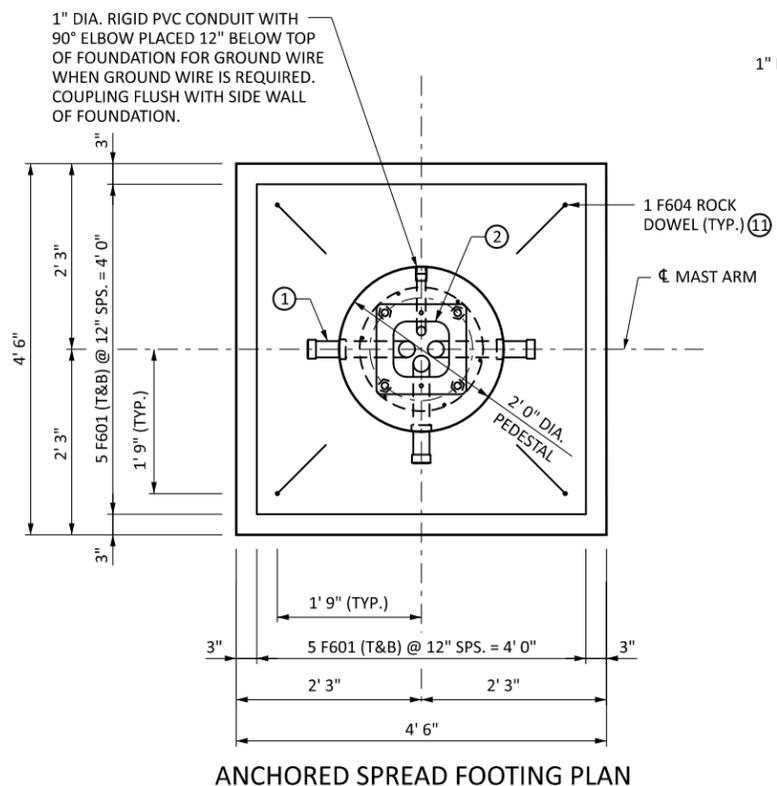

ANCHORED SPREAD FOOTING PLAN

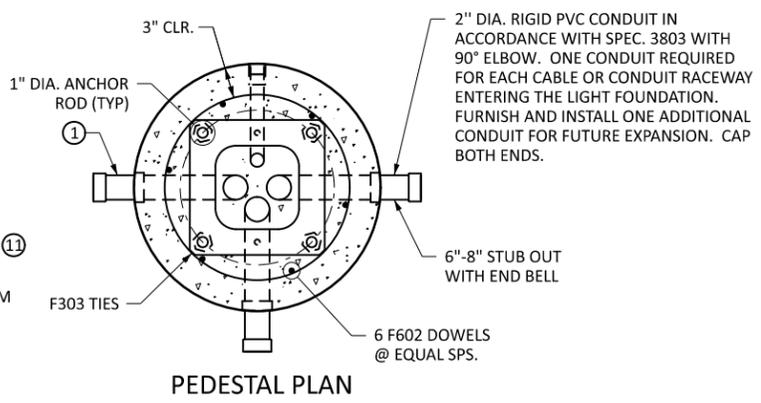

PEDESTAL PLAN

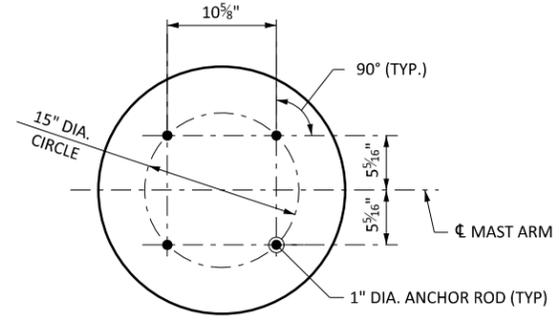

ANCHOR ROD PLACEMENT

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF ROCK USED IN DESIGN IS 10 KSF.

THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:
 THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

SANDY SOILS
 UNIT WEIGHT = 125 PCF
 FRICTION ANGLE = 30°

CLAY SOILS
 UNIT WEIGHT = 125±10 PCF
 COHESION = 1000 PSF
 FRICTION ANGLE = 0°

BEDROCK:
 UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
 ROCK QUALITY DESIGNATION (RQD): 50%
 JOINT CONDITION RATING (JCOND₉₉): 20

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.


NOTES:
 REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.


FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

(T&B) DENOTES TOP AND BOTTOM.

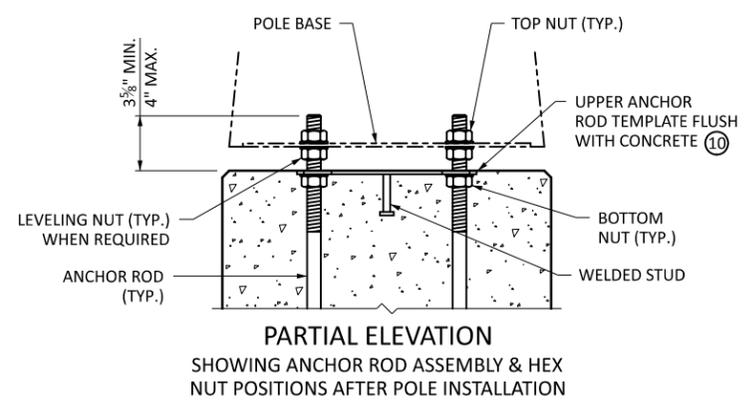

PARTIAL ELEVATION
 SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

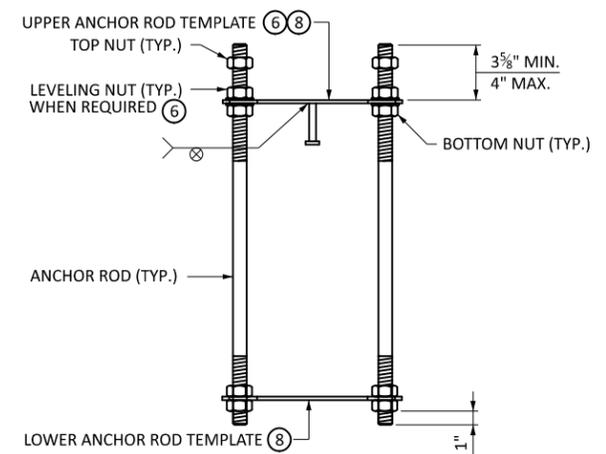


ANCHOR ROD ASSEMBLY


FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

- ① EXTEND CONDUITS THROUGH FOOTING WHEN NECESSARY TO MAINTAIN 18-INCH TO 24-INCH EMBEDMENT.
- ② TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT INSIDE THE ANCHOR ROD TEMPLATE.
- ③ ENSURE BOTTOM OF FOOTING IS SUPPORTED ON COMPETENT BEDROCK.
- ④ ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
- ⑤ PROVIDE AND INSTALL A GROUNDING ELECTRODE IN ACCORDANCE WITH 2565.3H.
- ⑥ FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- ⑦ PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- ⑧ TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- ⑨ FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- ⑩ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MNDOT'S APL UNDER BRIDGE PRODUCTS.
- ⑪ PLACE ROCK DOWEL IN 3-INCH DIAMETER HOLE AND ANCHOR USING AN APPROVED NON-SHRINK GROUT FOUND ON MNDOT'S APL UNDER CONCRETE PRODUCTS.

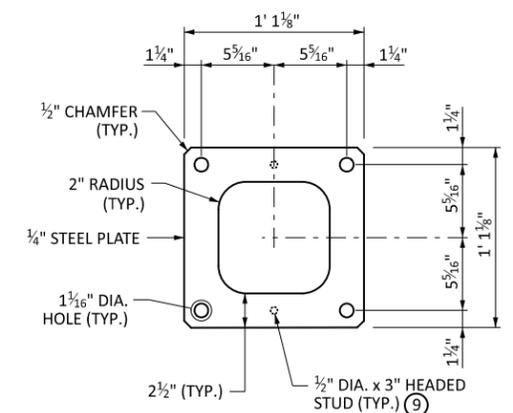

ANCHOR ROD TEMPLATE
 TWO REQUIRED PER ASSEMBLY

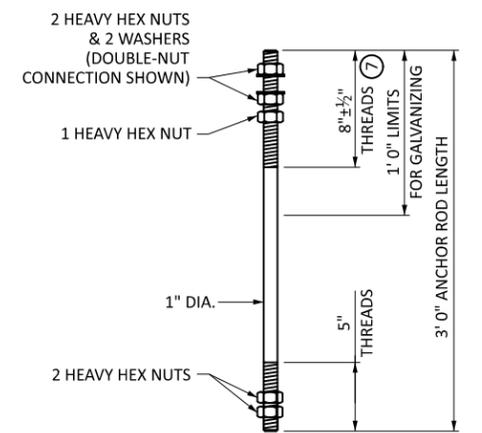


ANCHOR ROD & HARDWARE
 FOUR REQUIRED PER ASSEMBLY

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|----------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 20 | 4' 0" | — | FOOTING REINFORCEMENT |
| F602 | 6 | BB+1' 7" | — | FOOTING DOWELS |
| F303 | CC | 5' 3" | — | PEDESTAL TIES |
| F604 | 4 | 4' 11" | — | ROCK DOWELS |


TO DETERMINE THE NUMBER OF F303 TIES REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF PEDESTAL, BB, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.

BAR BENDING DIAGRAMS









BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

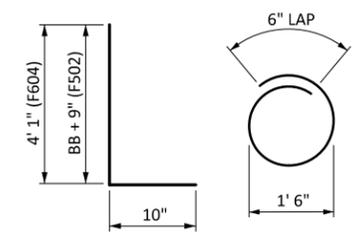

F602 & F604 F303

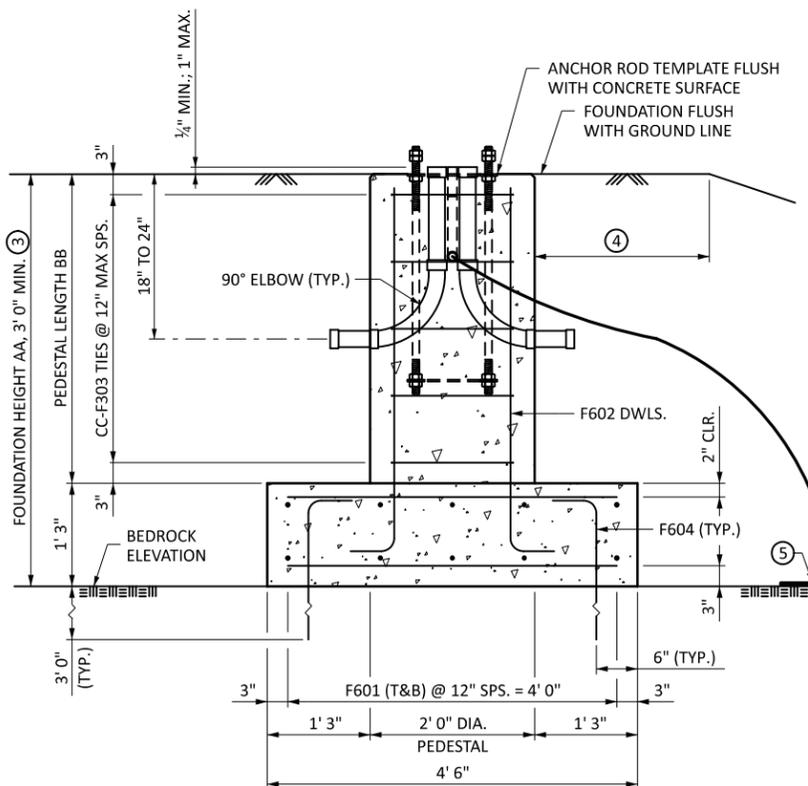

ANCHORED SPREAD FOOTING ELEVATION

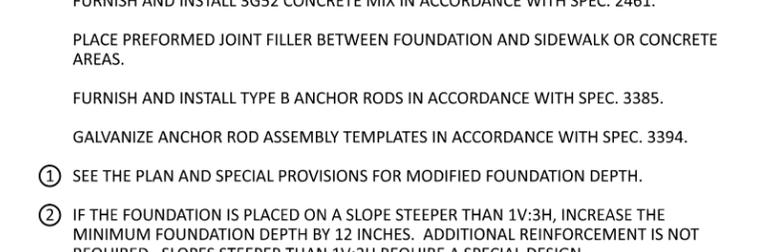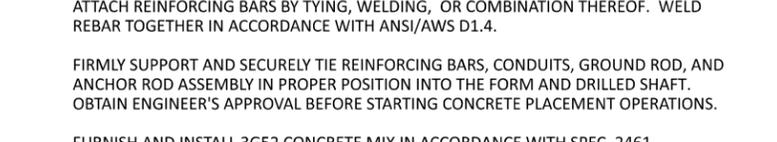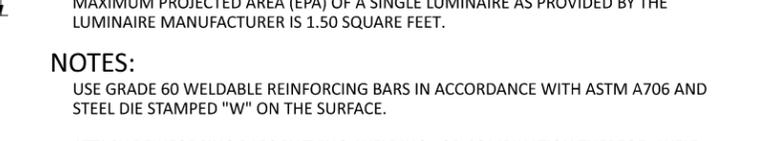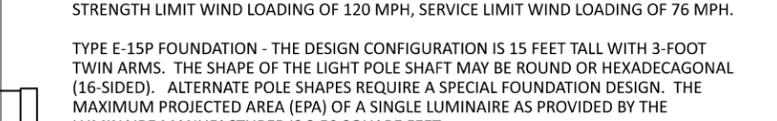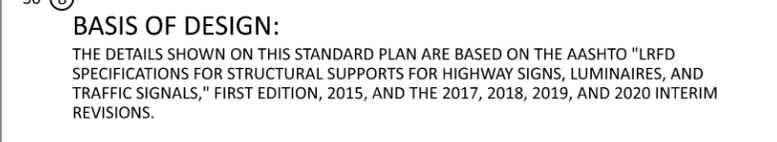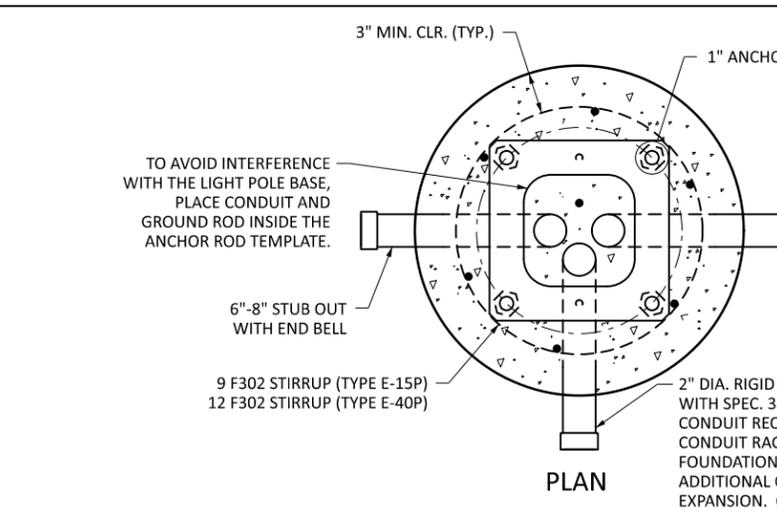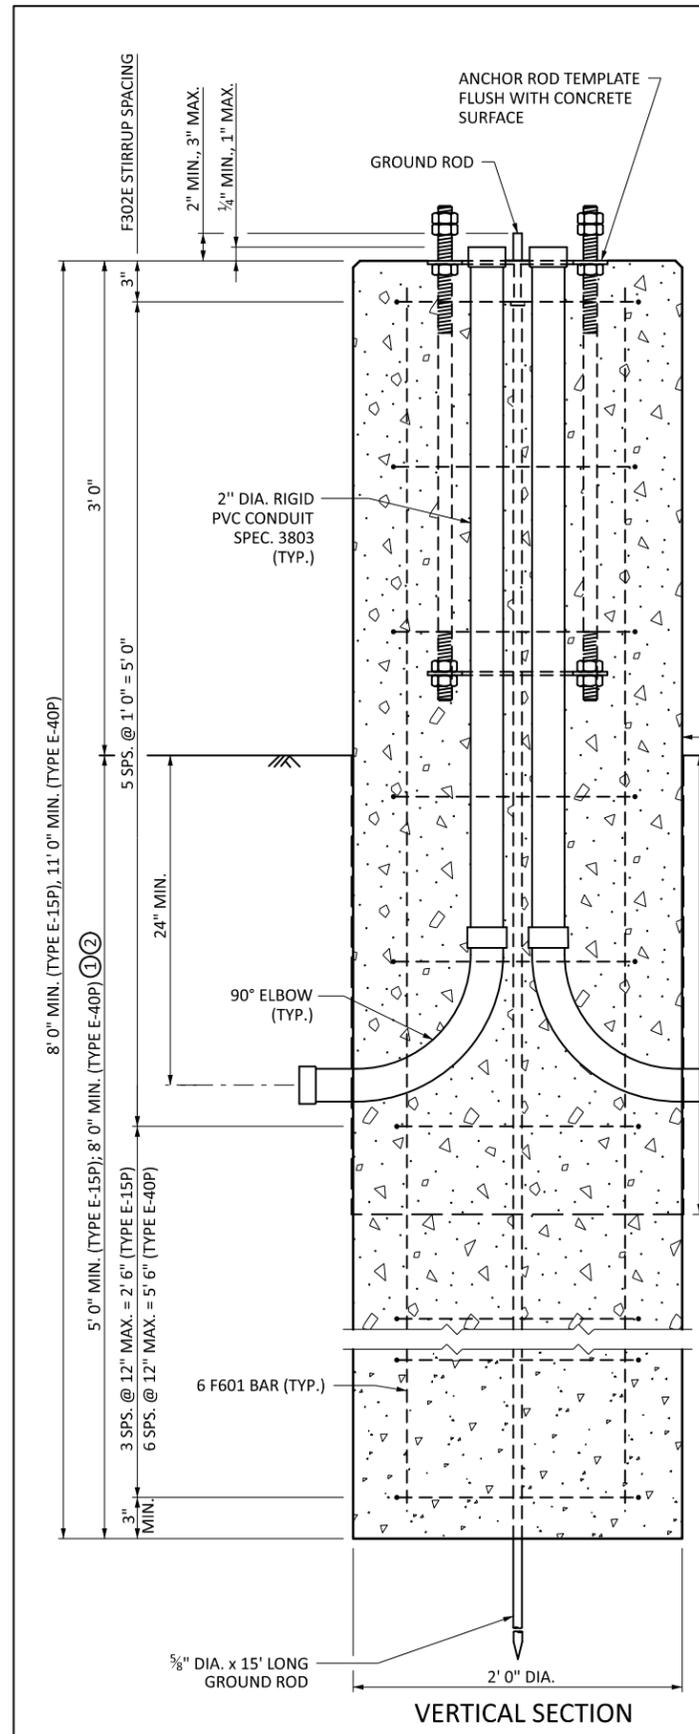

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE E-15P FOUNDATION - THE DESIGN CONFIGURATION IS 15 FEET TALL WITH 3-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.50 SQUARE FEET.

TYPE E-40P FOUNDATION - THE DESIGN CONFIGURATION IS 40 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

NOTES:
 USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.

ATTACH REINFORCING BARS BY TYING, WELDING, OR COMBINATION THEREOF. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

① SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.





② IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

- COHESIVE SOILS:**
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf
- GRANULAR SOILS:**
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

- USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2.D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MNDOT'S APL UNDER BRIDGE PRODUCTS.
- FURNISH AND INSTALL A CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION AND A MAXIMUM 30" BELOW FINISHED GRADE. REMOVE THE PORTION OF THE FORMING TUBE ABOVE THE FINISHED GRADE AFTER PLACING THE POLE.

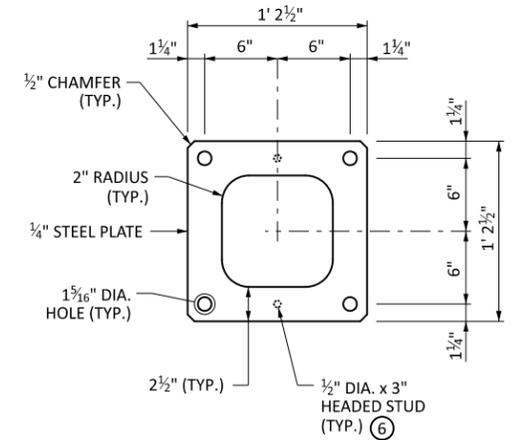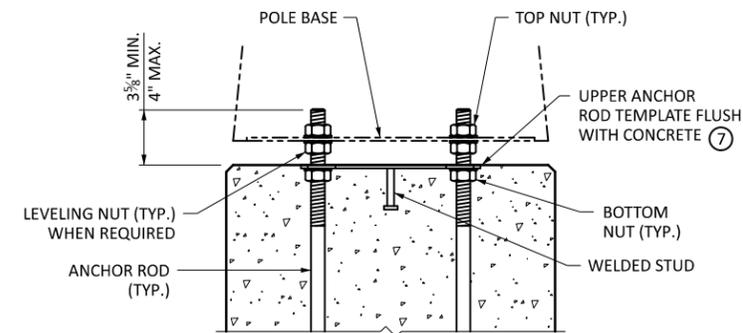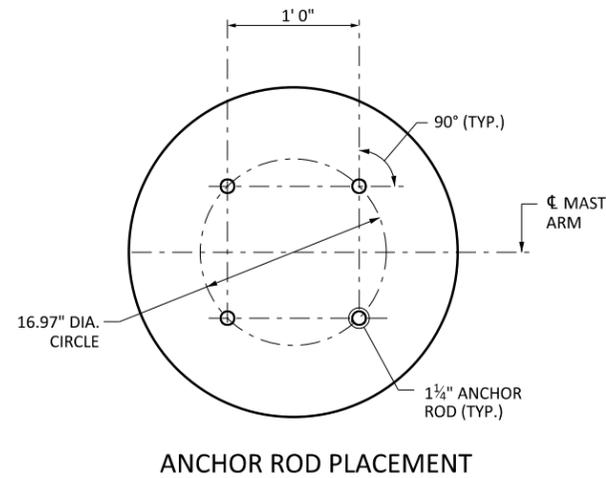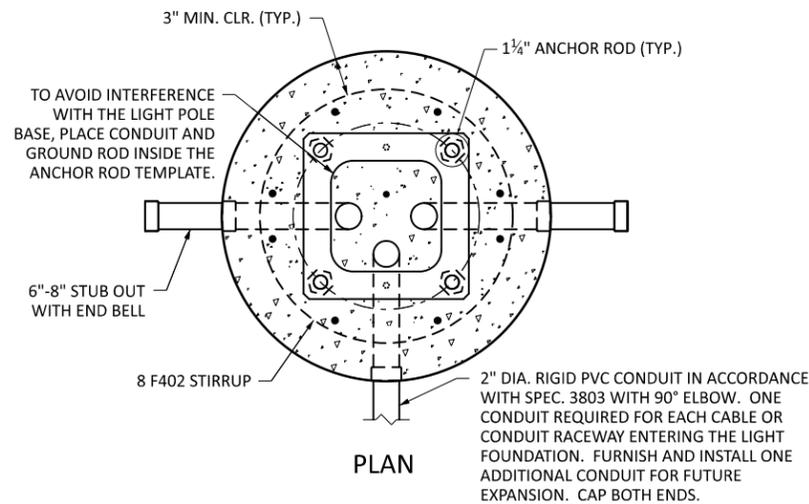

PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

ANCHOR ROD TEMPLATE
2 REQUIRED PER ASSEMBLY

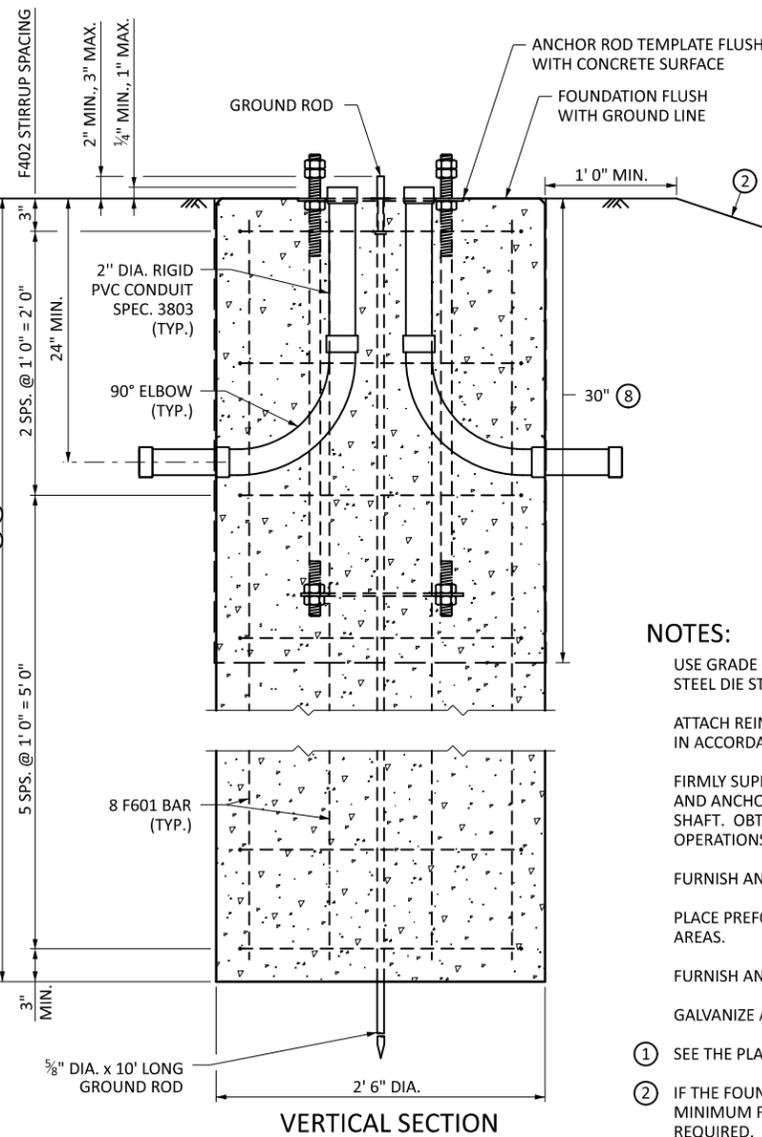

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH A SINGLE OR TWIN 12-FOOT ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE ON A SINGLE ARM AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.00 SQUARE FEET.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE FOR TWIN ARMS AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:

MIN. SHEAR STRENGTH: C = 1.0 ksf
UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:

MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

1 USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.

2 ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.

3 FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

4 FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.


5 PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

6 FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.


7 GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

8 SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.

9 IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

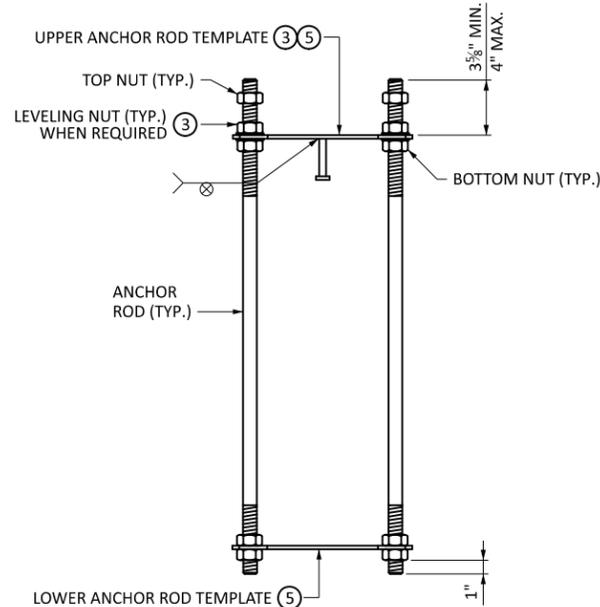

ANCHOR ROD ASSEMBLY

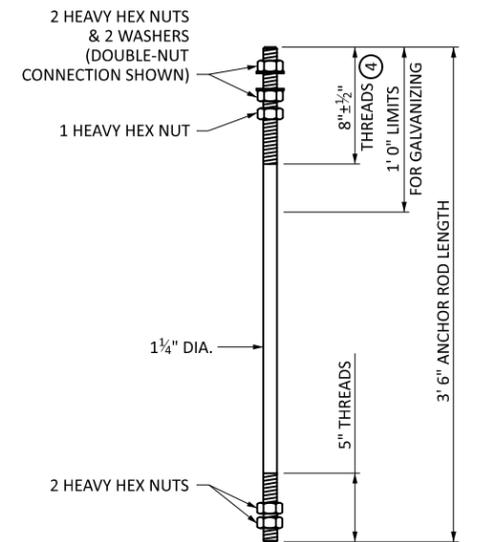


ANCHOR ROD & HARDWARE
4 REQUIRED PER ASSEMBLY

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 8 | 7' 0" | — | SHAFT VERTICALS |
| F402 | 8 | 8' 6" | TIES | SHAFT TIES |

BAR BENDING DIAGRAM

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.



LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN H
CAST-IN-PLACE DRILLED SHAFT
50' POLE OR LESS






NOT APPROVED

STANDARD PLAN
5-297.846
1 OF 8



STANDARD PLAN

STATE DESIGN ENGINEER
STATE PROJ. NO.
TRUNK HWY.
SHEET NO.
TOTAL SHEETS

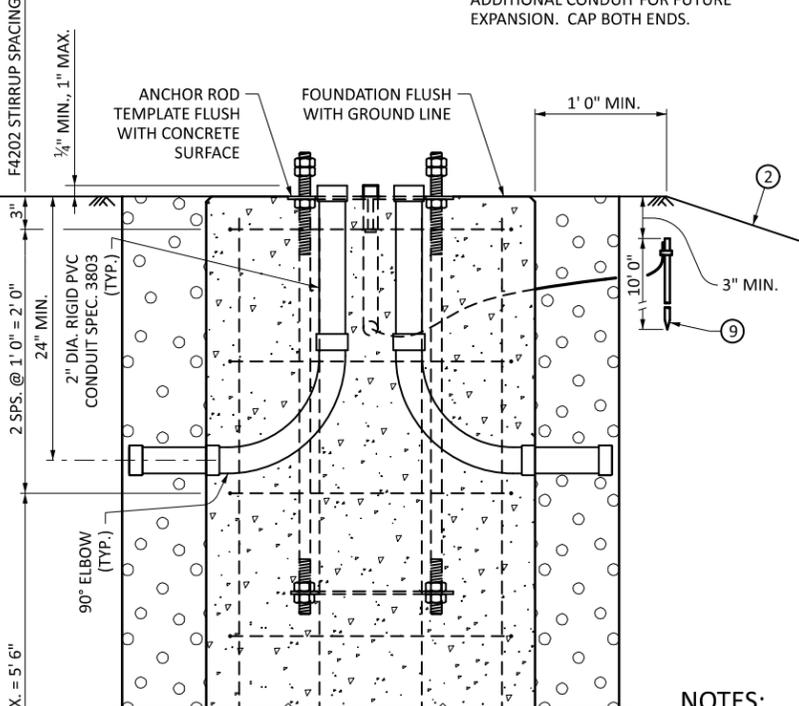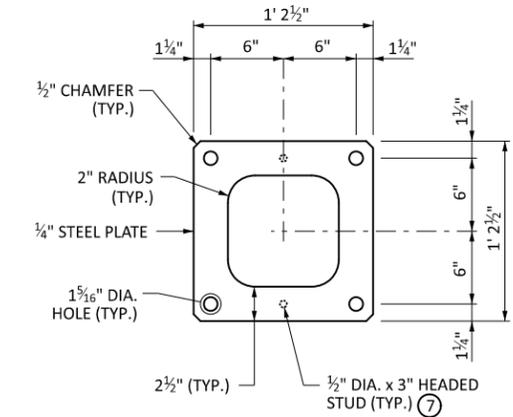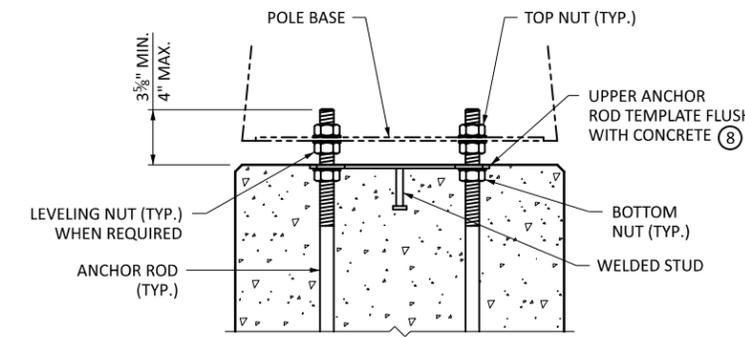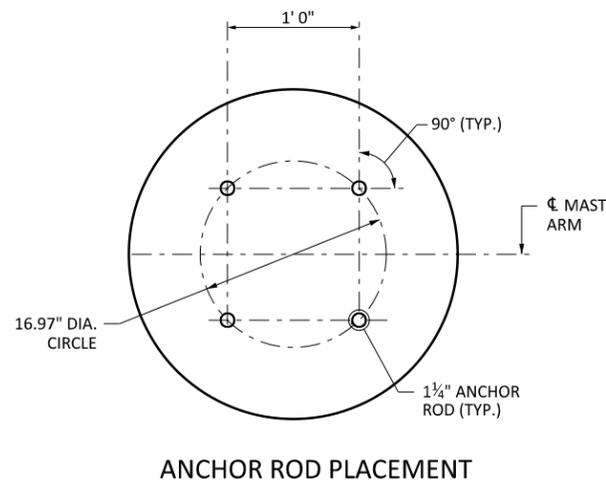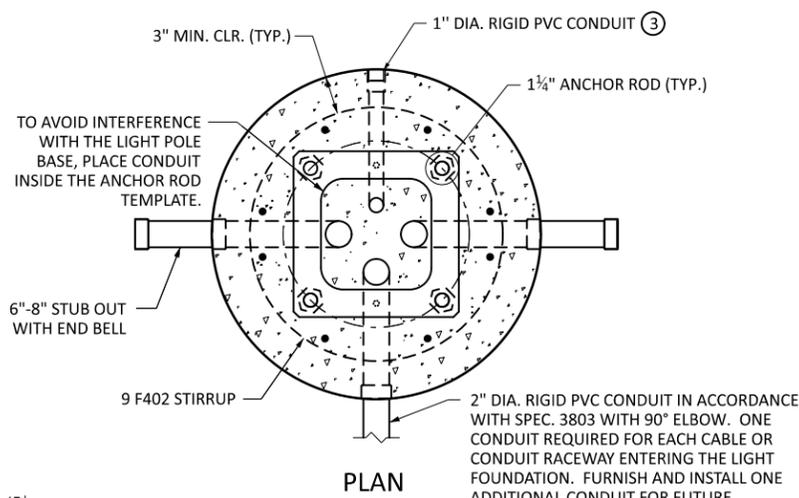

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH A SINGLE OR TWIN 12-FOOT ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE ON A SINGLE ARM AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.00 SQUARE FEET.



THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE ON TWIN ARMS AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

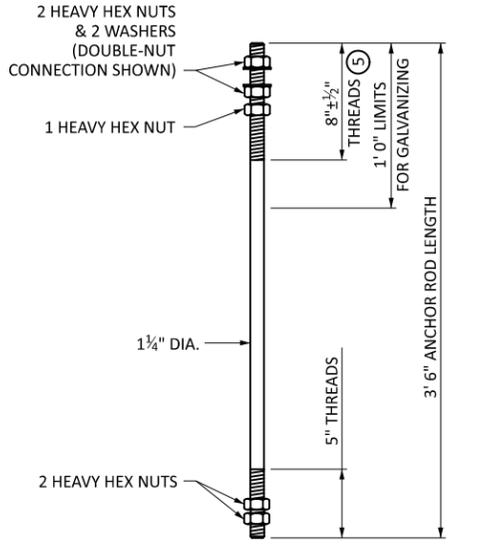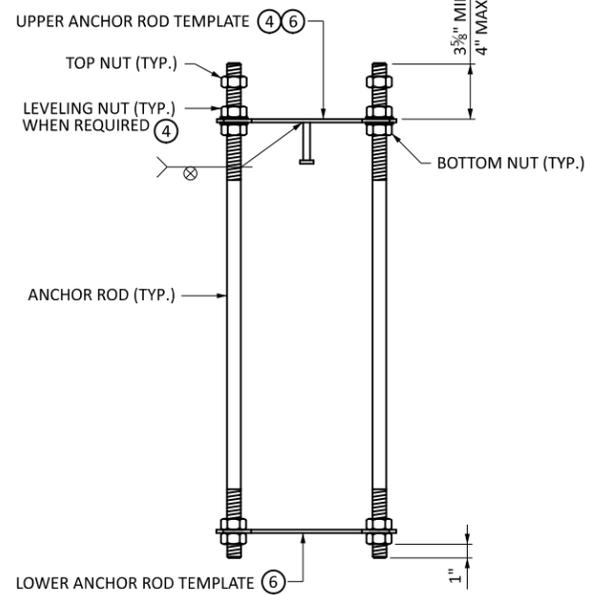

- NOTES:**
- FURNISH AND INSTALL PRECAST CONCRETE LIGHT FOUNDATIONS MANUFACTURED IN A PRECAST CONCRETE MANUFACTURING PLANT IN ACCORDANCE WITH SPEC. 3238 "PRECAST CONCRETE BOX CULVERTS."
 - USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
 - FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM.
 - USE 3V82 CONCRETE MIX.
 - PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
 - FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
 - GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
 - SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
 - IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

- 1" DIA. RIGID PVC CONDUIT WITH 90° ELBOW PLACED 12 INCHES BELOW TOP OF FOUNDATION FOR GROUND WIRE WHEN GROUND WIRE IS REQUIRED. COUPLING FLUSH WITH SIDE WALL OF FOUNDATION.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MndOT'S APL UNDER BRIDGE PRODUCTS.
- 5/8" DIA. GROUND ROD WITH CLAMP AND 6 AWG SOLID BARE COPPER WIRE. SEE PLAN FOR GROUND ROD LOCATIONS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 8 | 7' 6" | — | SHAFT VERTICALS |
| F402 | 9 | 8' 6" | TIES | SHAFT TIES |

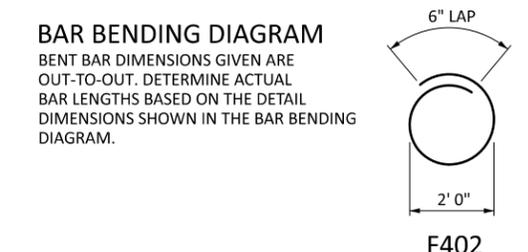

LEAD EXPERT OFFICE
 BRIAN SORENSON
 STATE TRAFFIC ENGINEER
 OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN H
 PRECAST DRILLED SHAFT
 50' POLE OR LESS


NOT APPROVED

STANDARD PLAN
 5-297.846
 2 OF 8




STANDARD PLAN


STATE DESIGN ENGINEER
 STATE PROJ. NO.
 TRUNK HWY.
 SHEET NO.
 TOTAL SHEETS

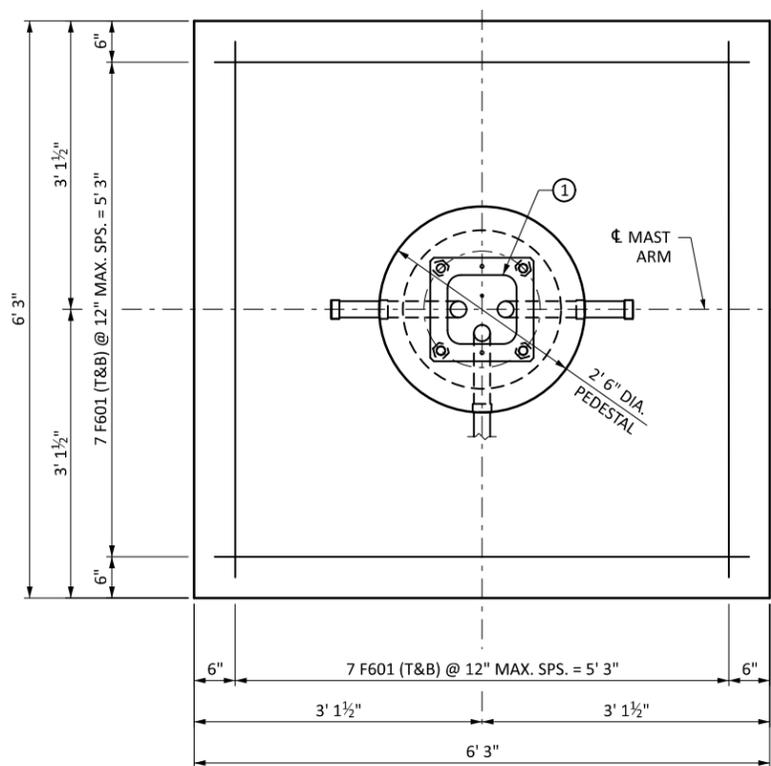


SPREAD FOOTING PLAN

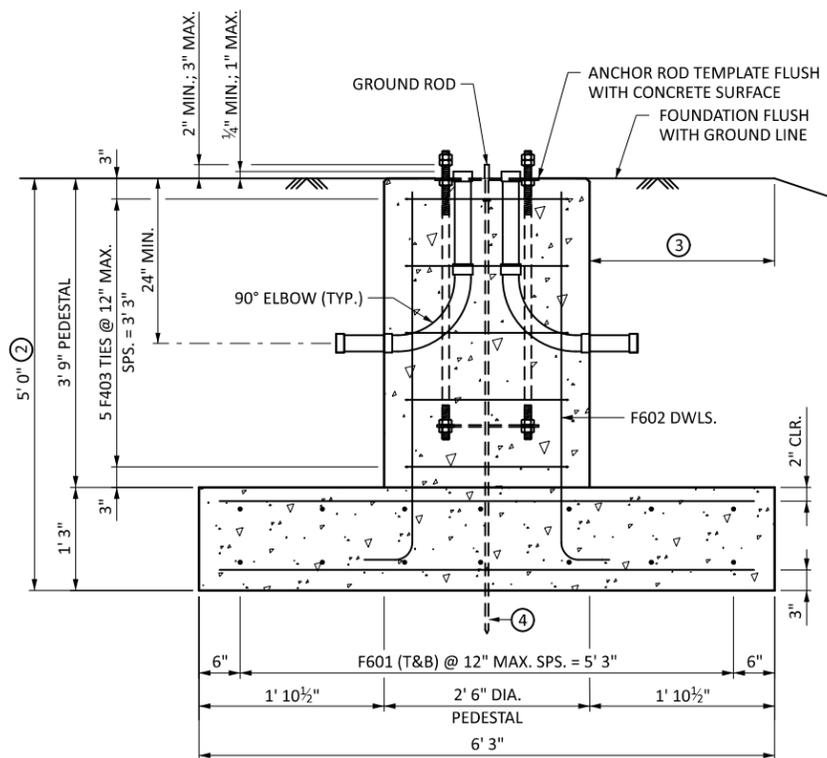


SPREAD FOOTING ELEVATION

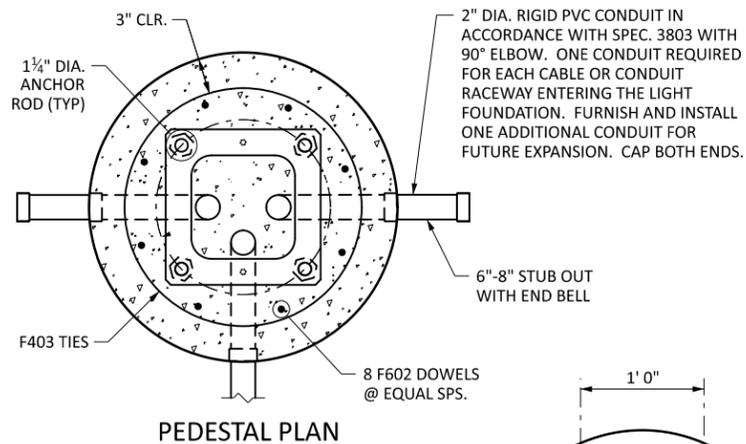


PEDESTAL PLAN

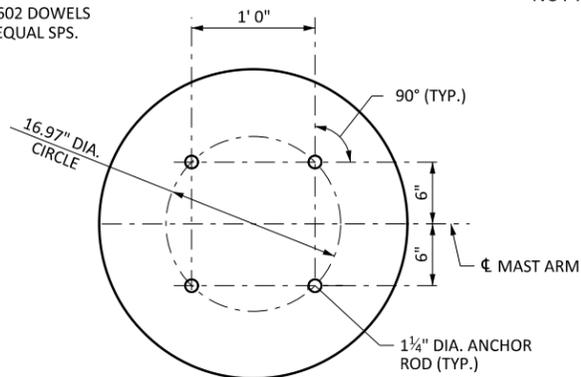


ANCHOR ROD PLACEMENT

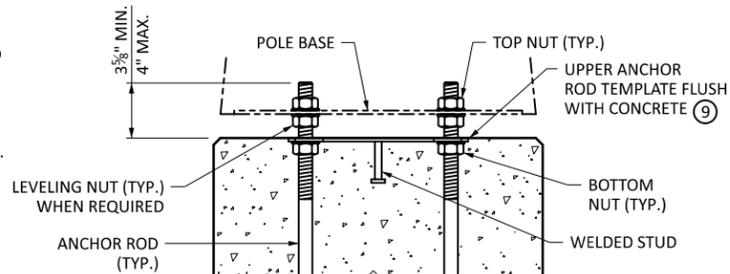


PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

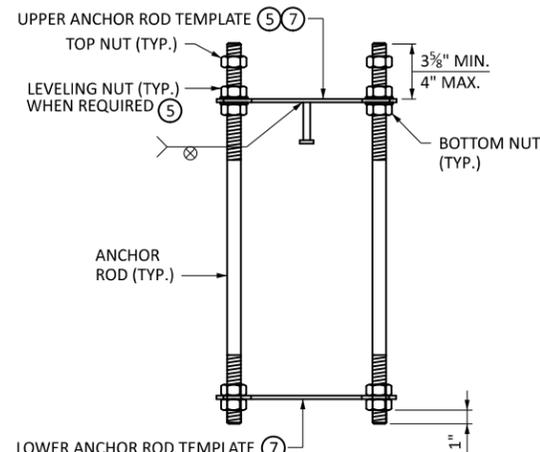

ANCHOR ROD ASSEMBLY

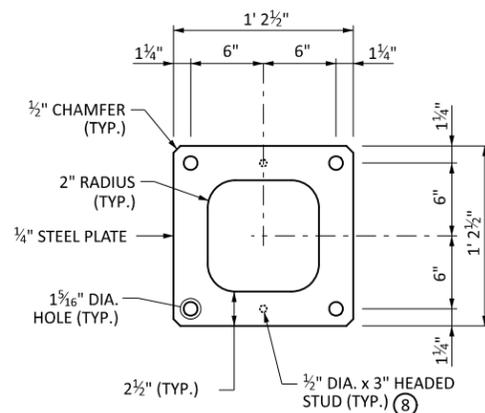

ANCHOR ROD TEMPLATE
TWO REQUIRED PER ASSEMBLY

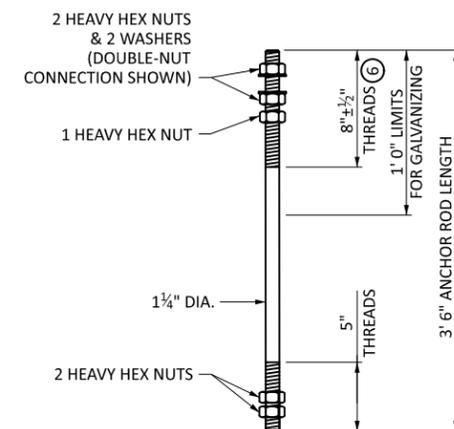

ANCHOR ROD & HARDWARE
FOUR REQUIRED PER ASSEMBLY

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF SOIL USED IN DESIGN IS 4 KSF.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH A SINGLE OR TWIN 12-FOOT ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE ON A SINGLE ARM AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.00 SQUARE FEET.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE FOR TWIN ARMS AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

SANDY SOILS
UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°

CLAY SOILS
UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

| LOAD CASE | EFFECTIVE WIDTH B' (FT) | EFFECTIVE SOIL PRESSURE (KSF) |
|-----------|-------------------------|-------------------------------|
| SERVICE | 5.00 | 1.06 |
| STRENGTH | 3.28 | 2.22 |

NOTES:

REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

(T&B) DENOTES TOP AND BOTTOM.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.


PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

- TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT AND GROUND ROD INSIDE THE ANCHOR ROD TEMPLATE.
- PLACE THE BOTTOM OF FOOTING 5 FEET BELOW THE PROPOSED GROUNDLINE.
- ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
- 5/8" DIAMETER x 10-FOOT-LONG GROUND ROD.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 28 | 5' 9" | — | FOOTING REINFORCEMENT |
| F602 | 8 | 5' 3" | — | FOOTING DOWELS |
| F403 | 5 | 6' 10" | TIES | PEDESTAL TIES |

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.



LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN H
SPREAD FOOTING
50' POLE OR LESS

NOT APPROVED

STANDARD PLAN
5-297.846






3 OF 8



STANDARD PLAN

STATE DESIGN ENGINEER
STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

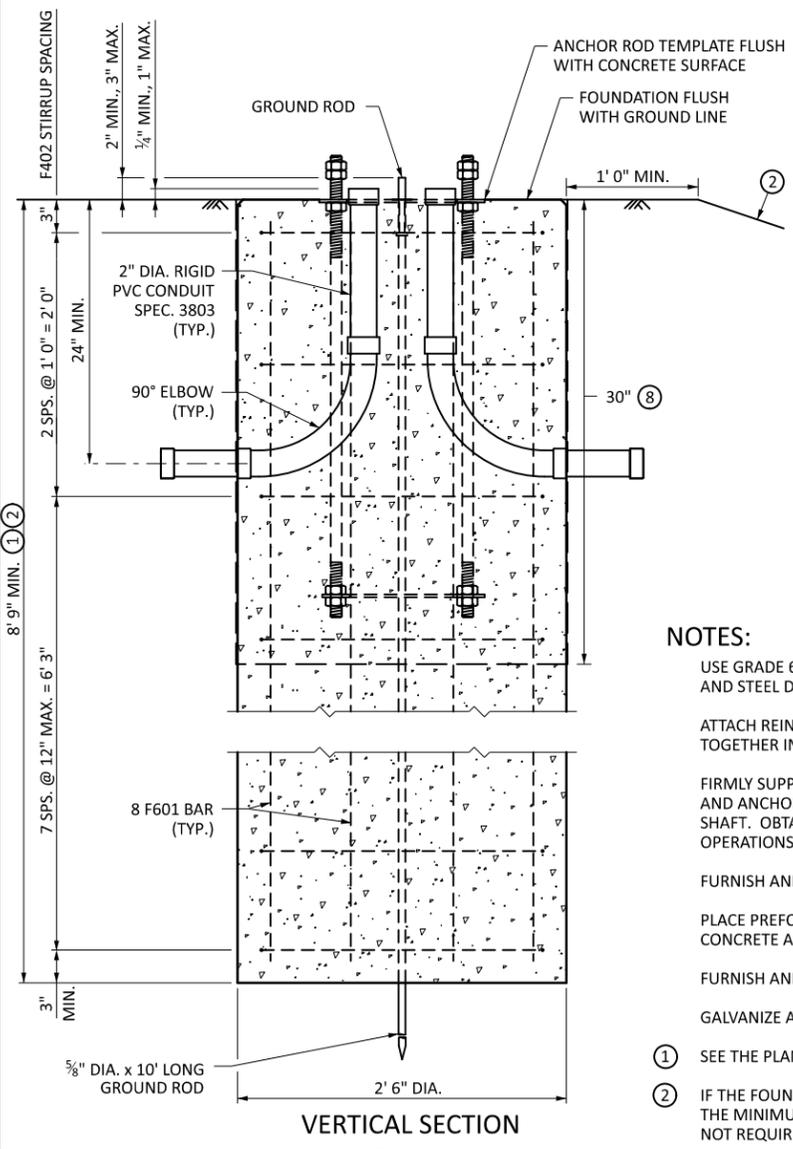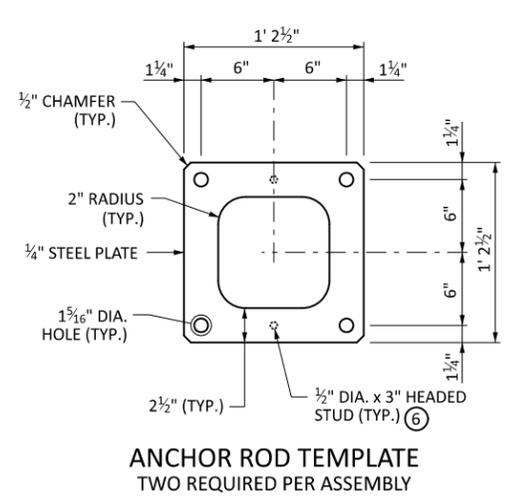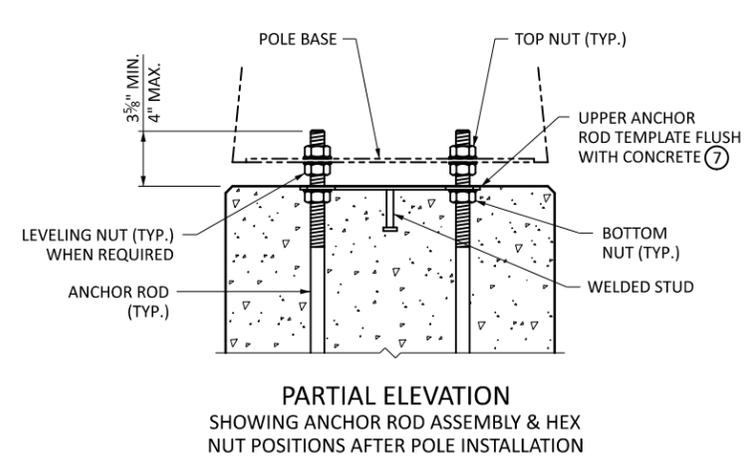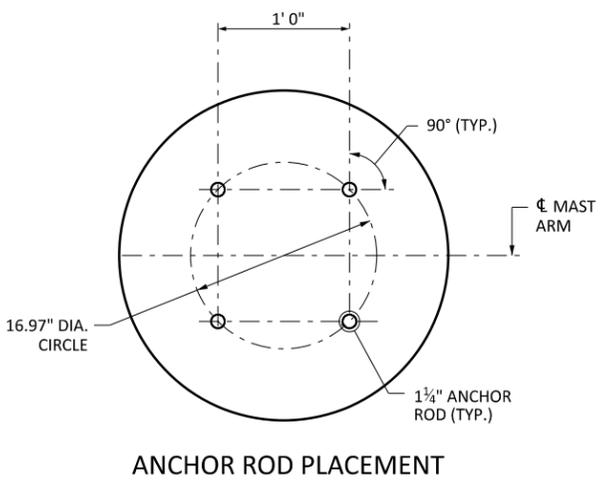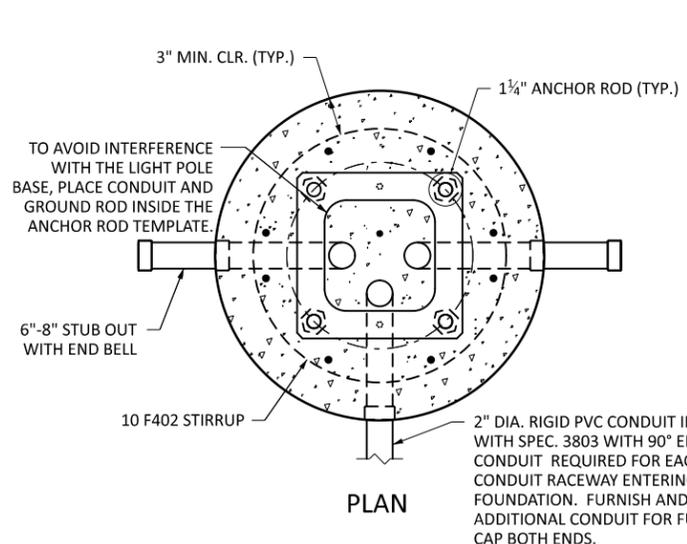

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.00 SQUARE FEET.



GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

- NOTES:**
- USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
 - ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.
 - FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, GROUND ROD, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.
 - FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.
 - PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
 - FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
 - GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
 - SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
 - IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.




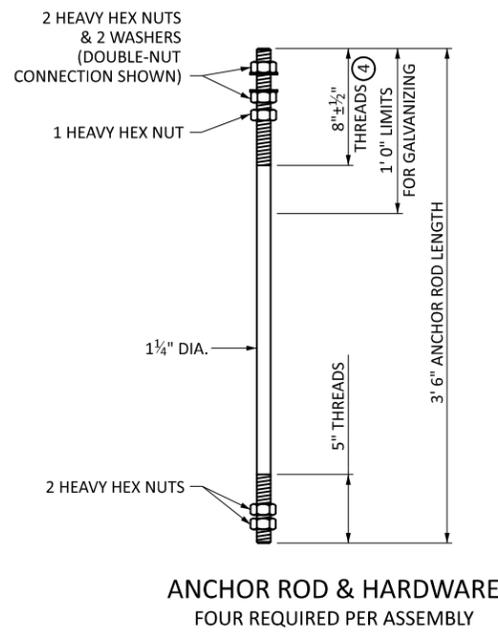
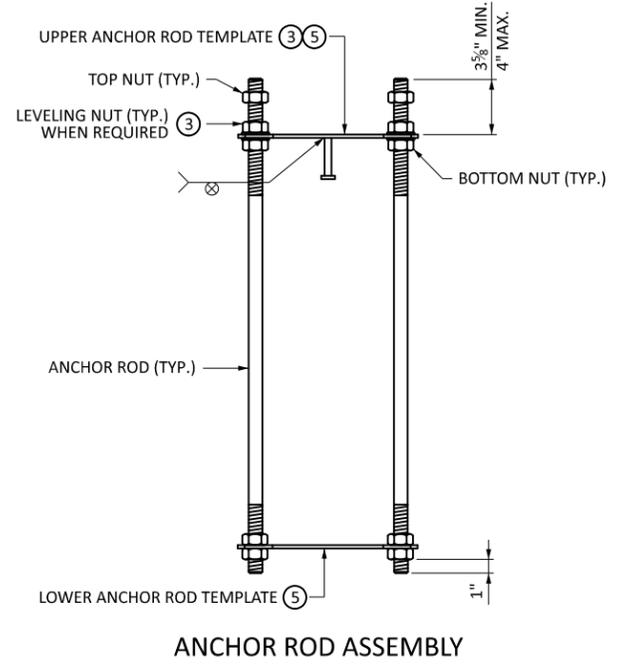


- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- FURNISH AND INSTALL A MAXIMUM 30" LONG CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION. DO NOT USE A FULL-LENGTH FORMING TUBE.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 8 | 8' 3" | — | SHAFT VERTICALS |
| F402 | 10 | 8' 6" | TIES | SHAFT TIES |

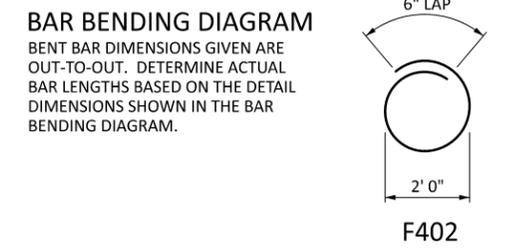

STANDARD PLAN

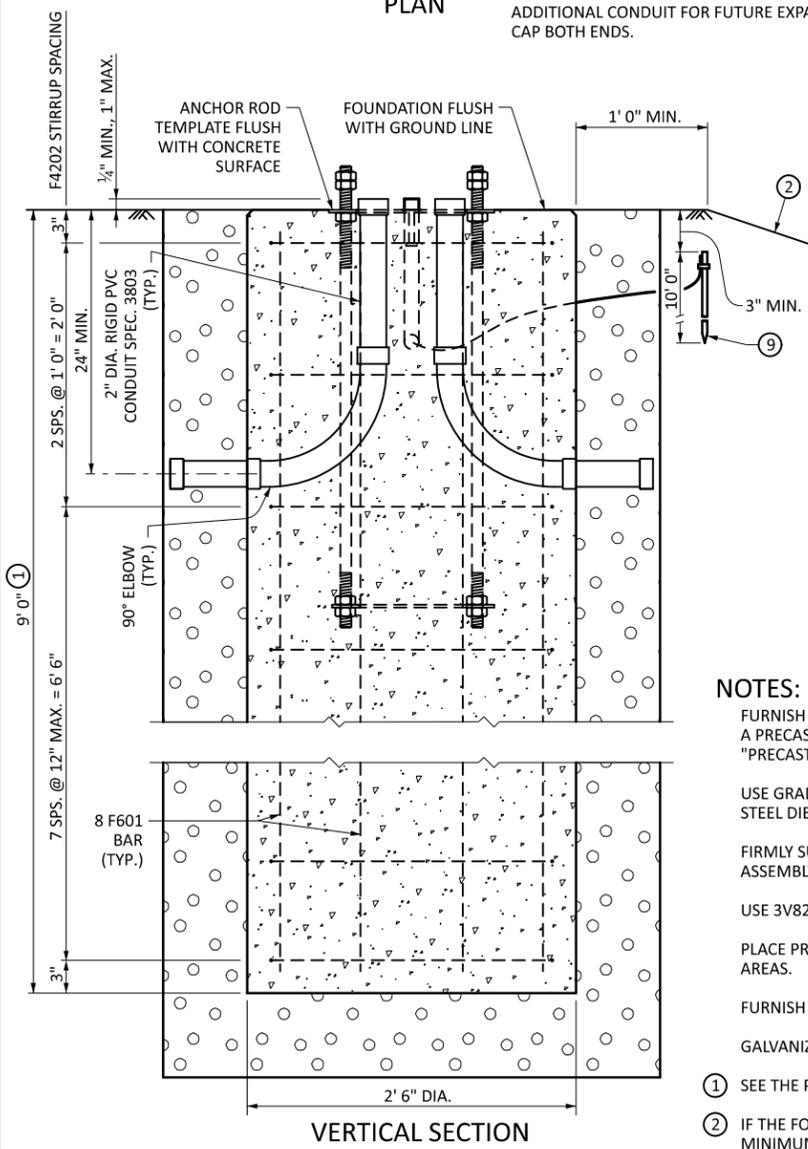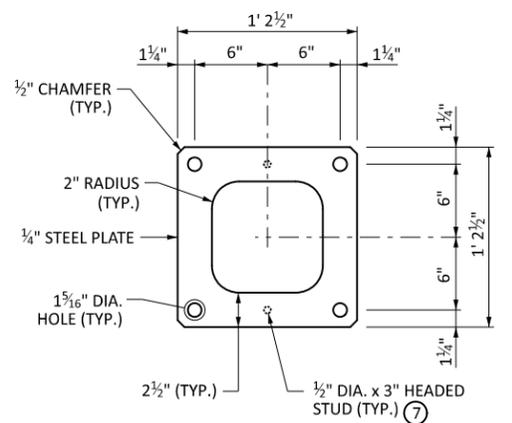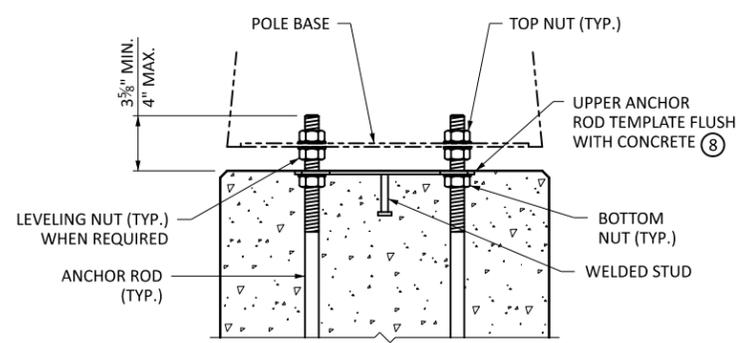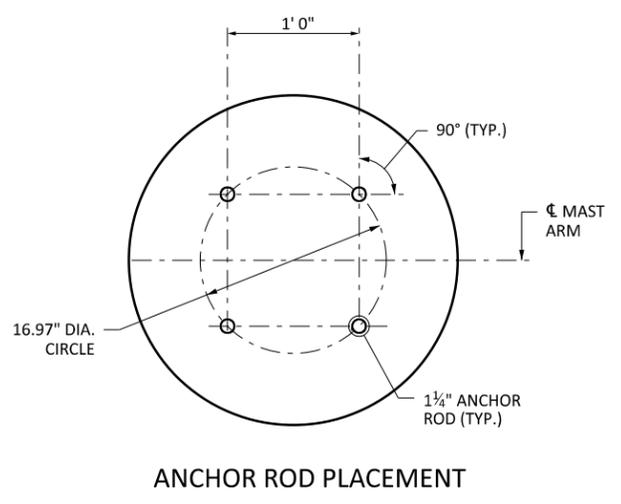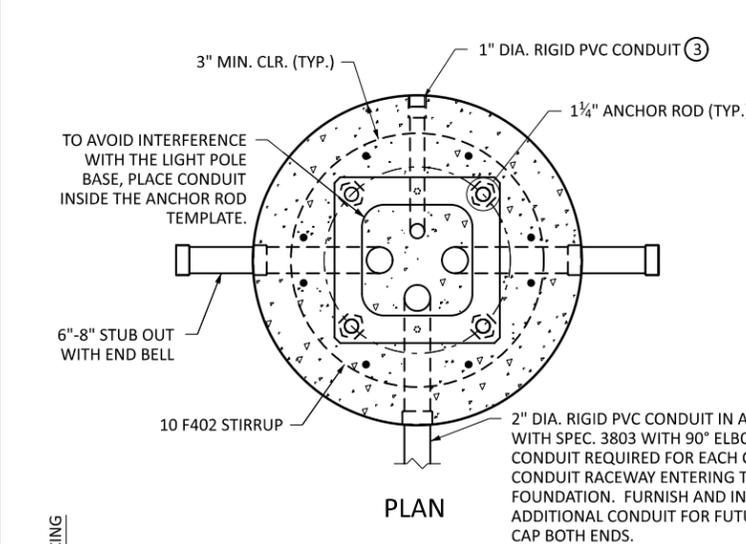

BASIS OF DESIGN:
 THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 3.00 SQUARE FEET.

GEOTECHNICAL PARAMETERS:
 THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:



COHESIVE SOILS:
 MIN. SHEAR STRENGTH: C = 1.0 ksf
 UNIT WEIGHT OF SOIL: $\gamma = 125 \pm 10$ pcf

GRANULAR SOILS:
 MIN. ANGLE OF FRICTION: $\phi = 30^\circ$
 UNIT WEIGHT OF SOIL: $\gamma = 125$ pcf
 MAX. COEFFICIENT OF FRICTION: $\mu = 0.70$

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

PARTIAL ELEVATION SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

ANCHOR ROD TEMPLATE TWO REQUIRED PER ASSEMBLY

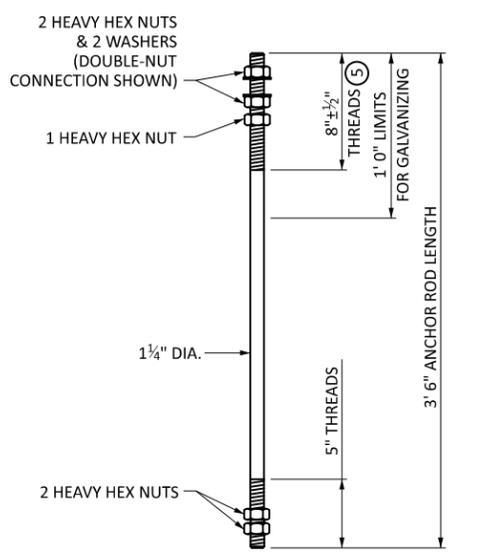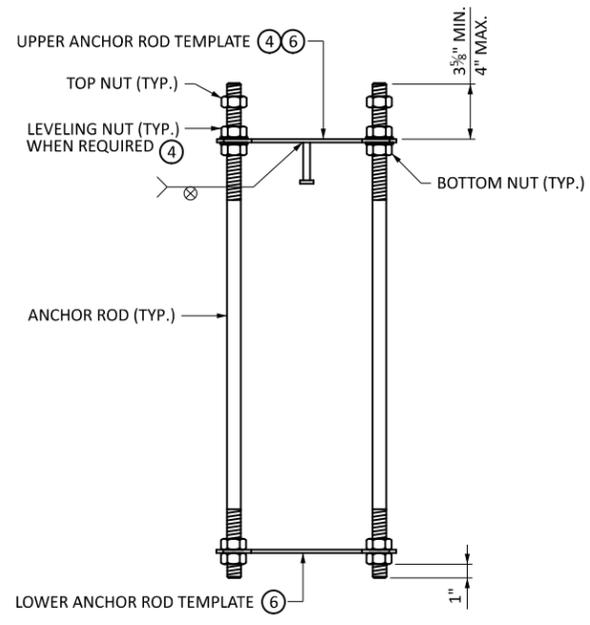


ANCHOR ROD ASSEMBLY

ANCHOR ROD & HARDWARE FOUR REQUIRED PER ASSEMBLY

- NOTES:**
- FURNISH AND INSTALL PRECAST CONCRETE LIGHT FOUNDATIONS MANUFACTURED IN A PRECAST CONCRETE MANUFACTURING PLANT IN ACCORDANCE WITH SPEC. 3238 "PRECAST CONCRETE BOX CULVERTS."
 - USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.
 - FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM.
 - USE 3V82 CONCRETE MIX.
 - PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.
 - FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.
 - GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.
 - SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.
 - IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

- 1" DIA. RIGID PVC CONDUIT WITH 90° ELBOW PLACED 12 INCHES BELOW TOP OF FOUNDATION FOR GROUND WIRE WHEN GROUND WIRE IS REQUIRED. COUPLING FLUSH WITH SIDE WALL OF FOUNDATION.
- FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MndOT'S APL UNDER BRIDGE PRODUCTS.
- 5/8" DIA. GROUND ROD WITH CLAMP AND 6 AWG SOLID BARE COPPER WIRE. SEE PLAN FOR GROUND ROD LOCATIONS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|--------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 8 | 8' 6" | — | SHAFT VERTICALS |
| F402 | 10 | 8' 6" | TIES | SHAFT TIES |

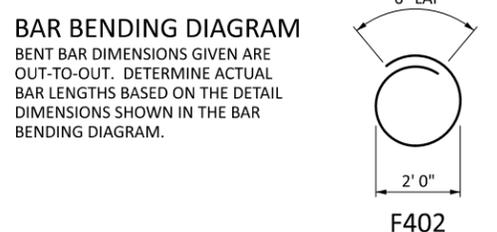

EXCAVATE AND BACKFILL IN ACCORDANCE WITH SPEC. 2545.3.

LEAD EXPERT OFFICE
 BRIAN SORENSON
 STATE TRAFFIC ENGINEER
 OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN H
 PRECAST DRILLED SHAFT
 50' POLE OR LESS - TWIN ARM
 LUMINAIRE FROM 1.5 TO 3.0 SQUARE FEET






NOT APPROVED

STANDARD PLAN
 5-297.846
 5 OF 8



STANDARD PLAN

STATE DESIGN ENGINEER
 STATE PROJ. NO.
 TRUNK HWY.
 SHEET NO.
 TOTAL SHEETS

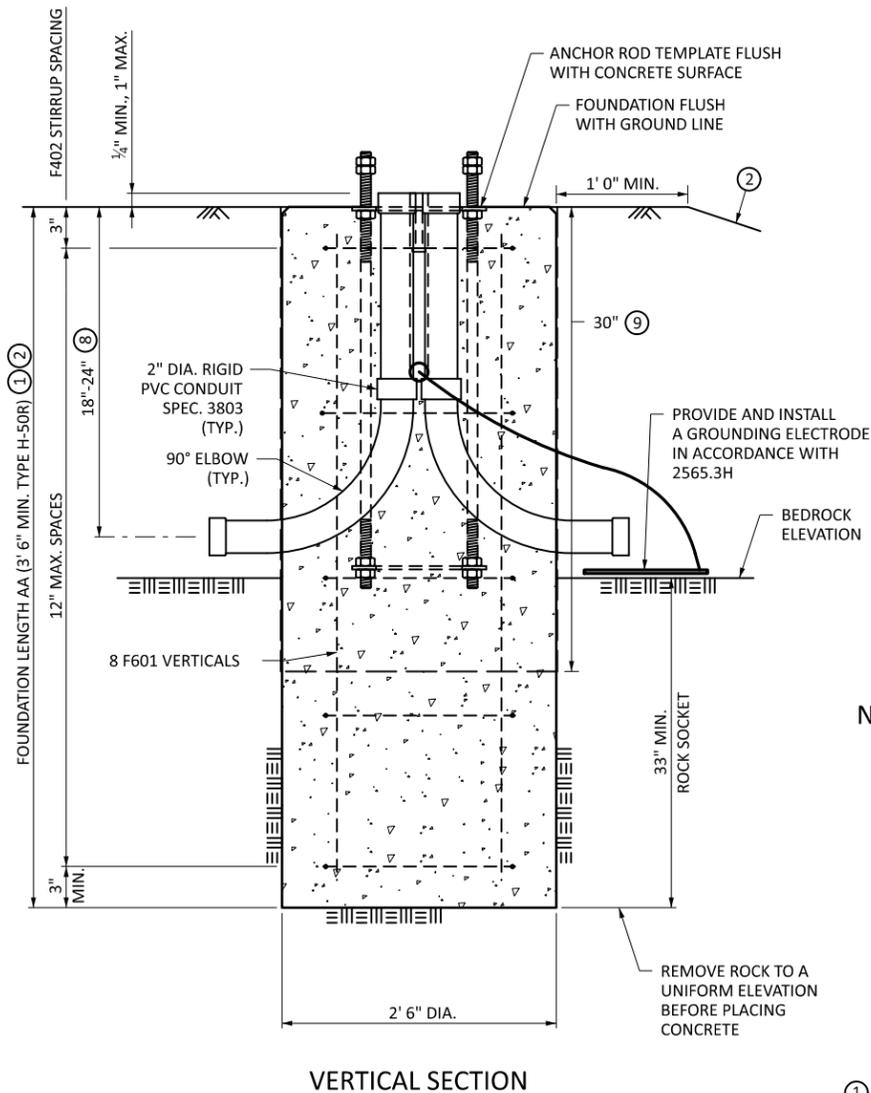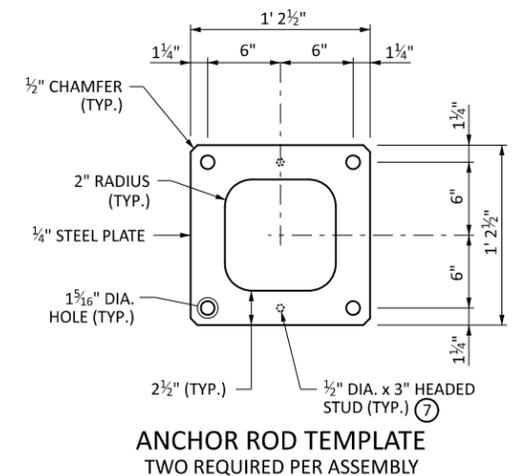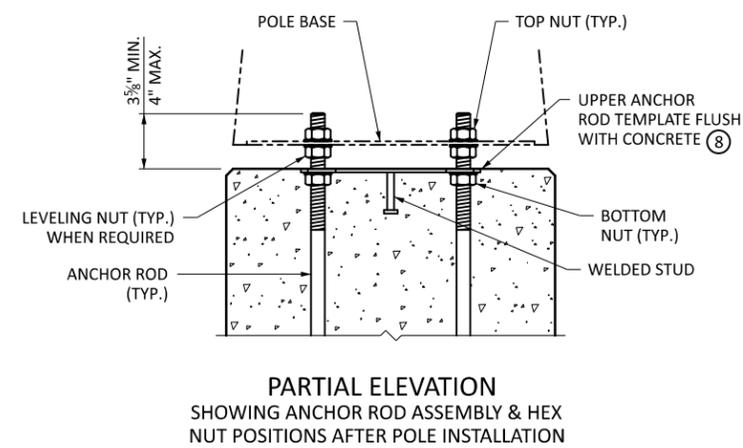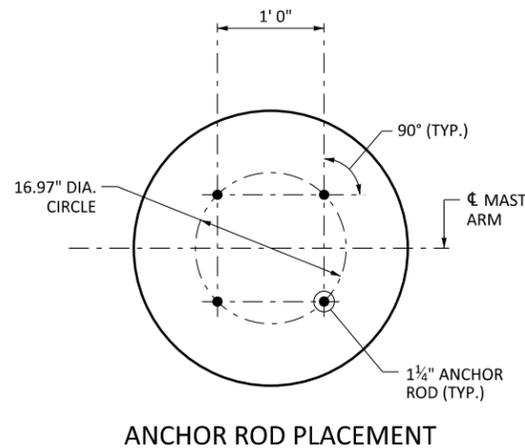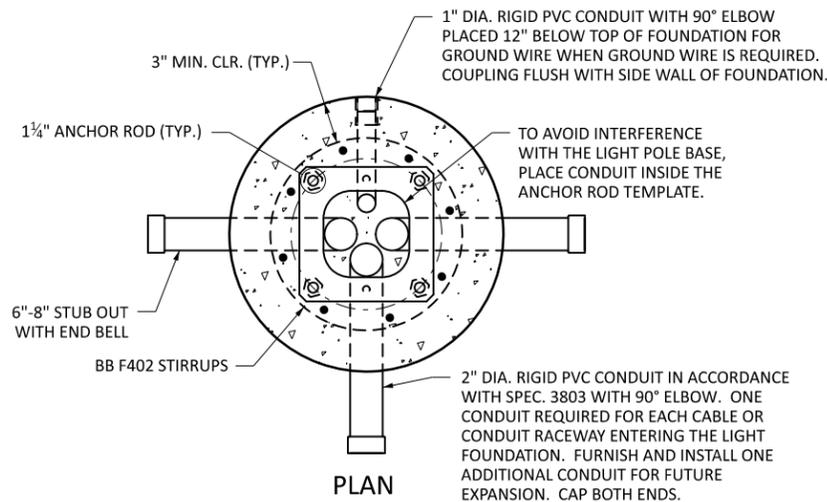

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

TYPE E-50R FOUNDATION - THE DESIGN CONFIGURATION IS 50 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN. THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

COHESIVE SOILS:

MIN. SHEAR STRENGTH: C = 1.0 ksf
UNIT WEIGHT OF SOIL: γ = 125±10 pcf

GRANULAR SOILS:

MIN. ANGLE OF FRICTION: φ = 30°
UNIT WEIGHT OF SOIL: γ = 125 pcf
MAX. COEFFICIENT OF FRICTION: μ = 0.70

BEDROCK:

MIN. UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
MIN. ROCK QUALITY DESIGNATION (RQD): 50%
MIN. JOINT CONDITION RATING (JCOND₉₉): 20

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

1 USE GRADE 60 WELDABLE REINFORCING BARS IN ACCORDANCE WITH ASTM A706 AND STEEL DIE STAMPED "W" ON THE SURFACE.

2 ATTACH REINFORCING BARS BY TYING, WELDING, OR BOTH. WELD REBAR TOGETHER IN ACCORDANCE WITH ANSI/AWS D1.4.

3 FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION INTO THE FORM AND DRILLED SHAFT. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

4 FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.



5 PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.

6 FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

7 GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

1 SEE THE PLAN AND SPECIAL PROVISIONS FOR MODIFIED FOUNDATION DEPTH.

2 IF THE FOUNDATION IS PLACED ON A SLOPE STEEPER THAN 1V:3H, INCREASE THE MINIMUM FOUNDATION DEPTH BY 12 INCHES. ADDITIONAL REINFORCEMENT IS NOT REQUIRED. SLOPES STEEPER THAN 1V:2H REQUIRE A SPECIAL DESIGN.

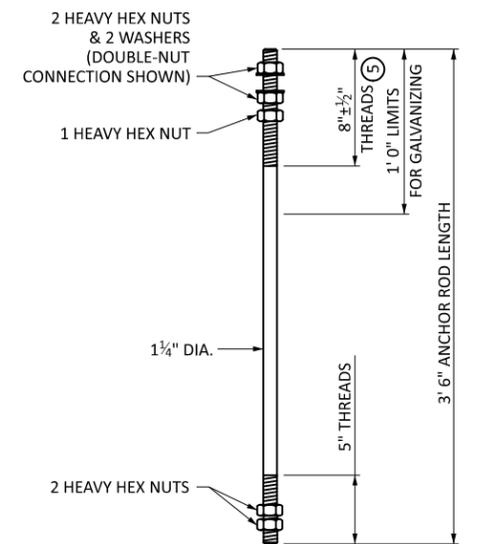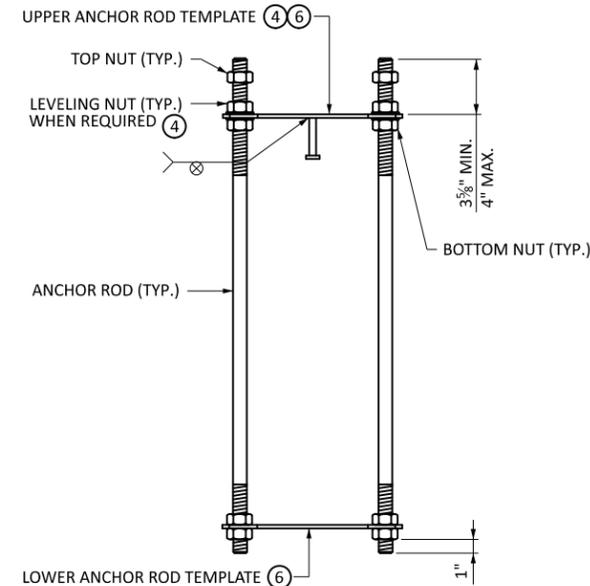

3 FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.

4 PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.

5 TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.

6 FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.

7 REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.

8 THE MINIMUM CONDUIT EMBEDMENT IS 18 INCHES BELOW FINISHED GRADE. SEE SPECIAL PROVISIONS IF SHALLOW BEDROCK IS ENCOUNTERED AND A REDUCED EMBEDMENT DEPTH IS REQUIRED.


9 FURNISH AND INSTALL A MAXIMUM 30" LONG CONCRETE FORMING TUBE TO FORM THE UPPER PORTION OF THE FOUNDATION. DO NOT USE A FULL-LENGTH FORMING TUBE.

| BILL OF REINFORCEMENT - TYPE H-50R | | | | |
|------------------------------------|------|---------|-------|-----------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 8 | AA - 6" | — | SHAFT VERTICALS |
| F402 | BB | 6' 10" | TIES | SHAFT TIES |

TO DETERMINE THE NUMBER OF F302 STIRRUPS REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF FOUNDATION, AA, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.

BAR BENDING DIAGRAM

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAM.



LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

LIGHT FOUNDATION - DESIGN H
CAST-IN-PLACE DRILLED SHAFT IN ROCK
TYPE H-50R - 50' POLE OR LESS

NOT APPROVED

STANDARD PLAN
5-297.846

7 OF 8




STANDARD PLAN

STATE PROJ. NO.


TRUNK HWY.

SHEET NO.

TOTAL SHEETS

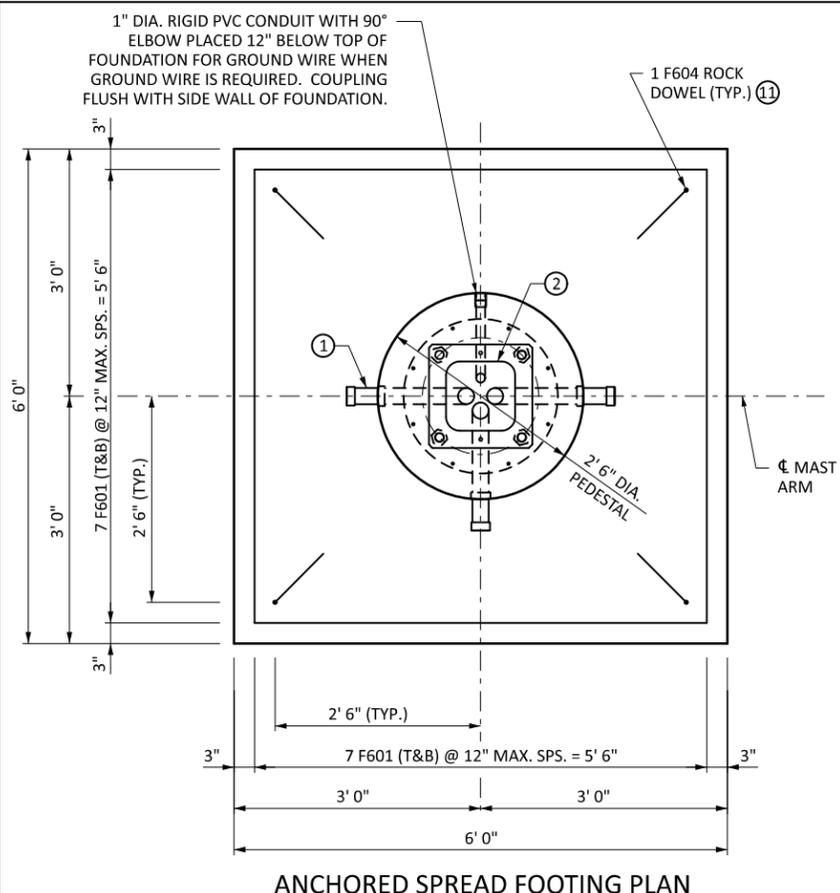


ANCHORED SPREAD FOOTING PLAN

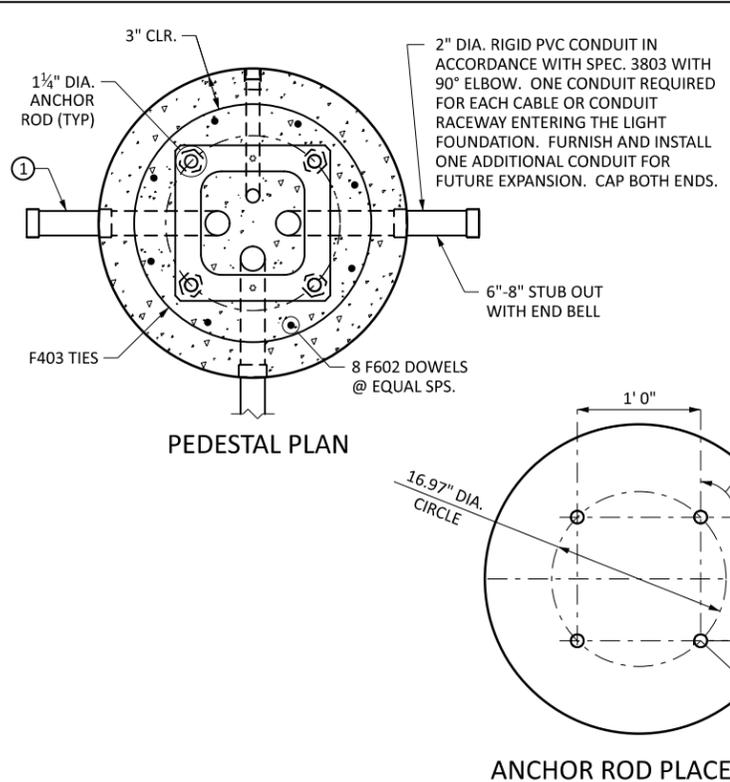

PEDESTAL PLAN


ANCHOR ROD PLACEMENT

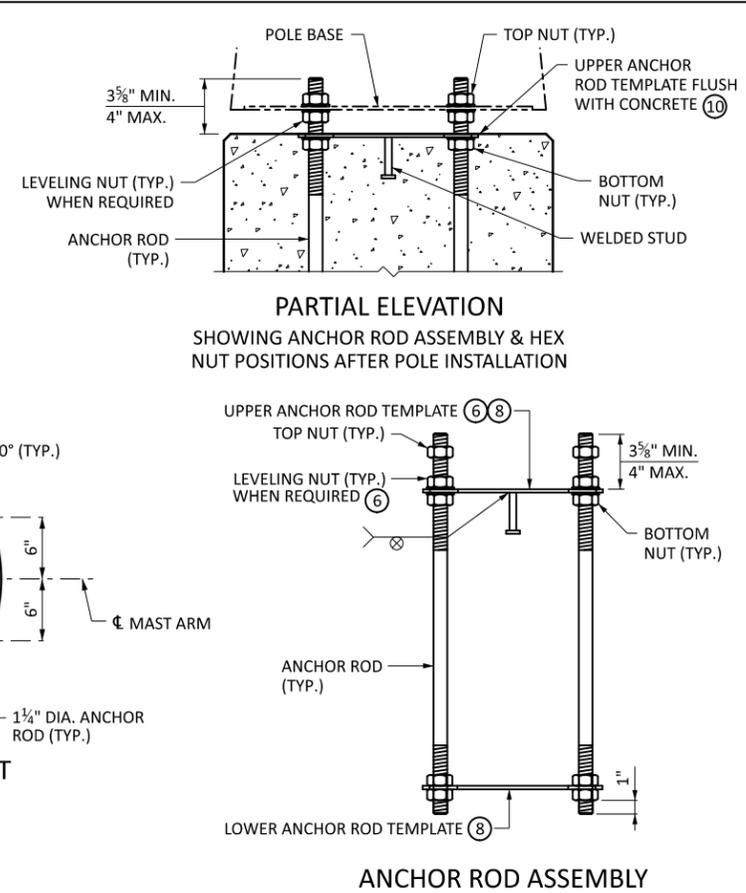

PARTIAL ELEVATION


SHOWING ANCHOR ROD ASSEMBLY & HEX NUT POSITIONS AFTER POLE INSTALLATION

ANCHOR ROD ASSEMBLY

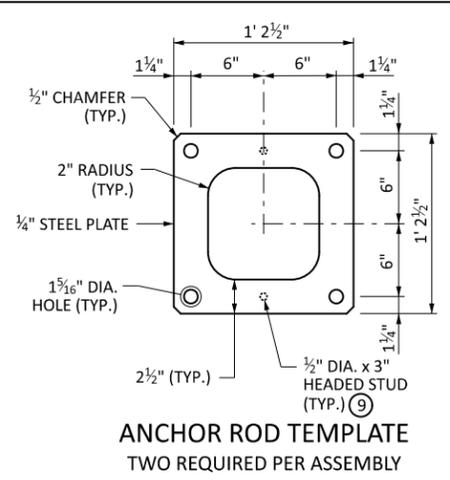


ANCHOR ROD TEMPLATE

TWO REQUIRED PER ASSEMBLY

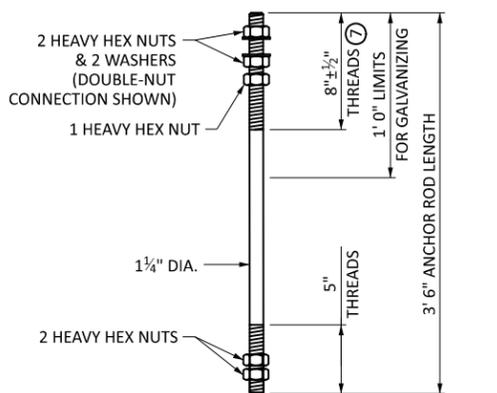

ANCHOR ROD & HARDWARE

FOUR REQUIRED PER ASSEMBLY

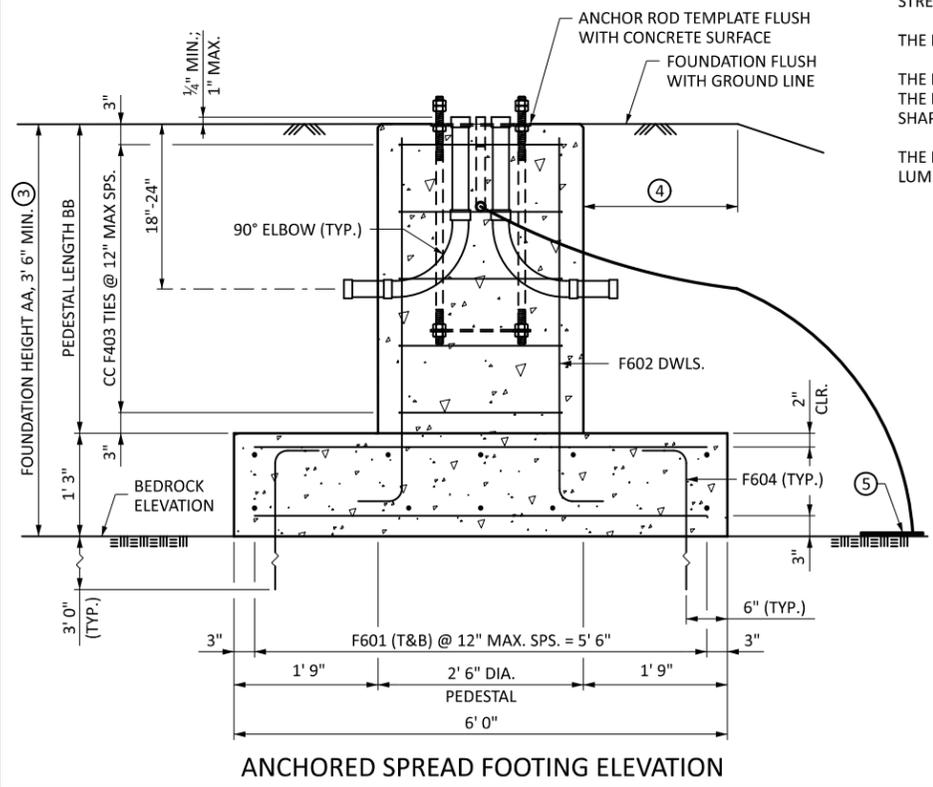

ANCHORED SPREAD FOOTING ELEVATION

BASIS OF DESIGN:

THE DETAILS SHOWN ON THIS STANDARD PLAN ARE BASED ON THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS," FIRST EDITION, 2015, AND THE 2017, 2018, 2019, AND 2020 INTERIM REVISIONS.

STRENGTH LIMIT WIND LOADING OF 120 MPH, SERVICE LIMIT WIND LOADING OF 76 MPH.

THE FACTORED BEARING RESISTANCE OF ROCK USED IN DESIGN IS 10 KSF.

THE DESIGN CONFIGURATION IS 50 FEET TALL WITH 12-FOOT TWIN ARMS. THE SHAPE OF THE LIGHT POLE SHAFT MAY BE ROUND OR HEXADECAGONAL (16-SIDED). ALTERNATE POLE SHAPES REQUIRE A SPECIAL FOUNDATION DESIGN.

THE MAXIMUM PROJECTED AREA (EPA) OF A SINGLE LUMINAIRE AS PROVIDED BY THE LUMINAIRE MANUFACTURER IS 1.50 SQUARE FEET.

GEOTECHNICAL PARAMETERS:

THE WATER TABLE IS ASSUMED BELOW THE BOTTOM OF FOOTING ELEVATION.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED WITH THE FOLLOWING ASSUMED SOIL PROPERTIES:

SANDY SOILS
UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°

CLAY SOILS
UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°

BEDROCK:
UNIAXIAL COMPRESSIVE STRENGTH: 700 psi
ROCK QUALITY DESIGNATION (RQD): 50%
JOINT CONDITION RATING (JCOND_{gg}): 20

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

NOTES:

REINFORCEMENT BARS IN ACCORDANCE WITH SPEC. 3301 GRADE 60 OR GREATER. USE DEFORMED STEEL BARS.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461.

FURNISH AND INSTALL TYPE B ANCHOR RODS IN ACCORDANCE WITH SPEC. 3385.

GALVANIZE ANCHOR ROD ASSEMBLY TEMPLATES IN ACCORDANCE WITH SPEC. 3394.

(T&B) DENOTES TOP AND BOTTOM.

FIRMLY SUPPORT AND SECURELY TIE REINFORCING BARS, CONDUITS, AND ANCHOR ROD ASSEMBLY IN PROPER POSITION IN THE FORMS. OBTAIN ENGINEER'S APPROVAL BEFORE STARTING CONCRETE PLACEMENT OPERATIONS.

PLACE PREFORMED JOINT FILLER BETWEEN FOUNDATION AND SIDEWALK OR CONCRETE AREAS.


- ① EXTEND CONDUITS THROUGH FOOTING WHEN NECESSARY TO MAINTAIN 18-INCH TO 24-INCH EMBEDMENT.
- ② TO AVOID INTERFERENCE WITH THE LIGHT POLE BASE, PLACE CONDUIT INSIDE THE ANCHOR ROD TEMPLATE.
- ③ ENSURE BOTTOM OF FOOTING IS SUPPORTED ON COMPETENT BEDROCK.
- ④ ENSURE GROUND IS LEVEL OVER THE PLAN DIMENSIONS OF THE FOOTING.
- ⑤ PROVIDE AND INSTALL A GROUNDING ELECTRODE IN ACCORDANCE WITH 2565.3H.
- ⑥ FOR SINGLE-NUT ANCHOR ROD CONNECTIONS, USE THE TOP NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS, USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE STARTING CONCRETE OPERATIONS. LEAVE THE NUTS SECURED AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR ANCHOR ROD CONNECTION IN ACCORDANCE WITH 2545.3H.1.a AND 2545.3H.1.b.
- ⑦ PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE UPPER ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- ⑧ TIGHTEN ANCHOR ROD TEMPLATE NUTS USING A 12-INCH-LONG WRENCH.
- ⑨ FURNISH AND INSTALL HEADED STUDS IN ACCORDANCE WITH 3391.2D "STUD WELDED FASTENERS" ON THE UPPER TEMPLATE AT THE LOCATIONS SHOWN.
- ⑩ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS AND ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.
- ⑪ PLACE ROCK DOWEL IN 3-INCH-DIAMETER HOLE AND ANCHOR USING AN APPROVED NON-SHRINK GROUT FOUND ON MnDOT'S APL UNDER CONCRETE PRODUCTS.

| BILL OF REINFORCEMENT | | | | |
|-----------------------|------|----------|-------|-----------------------|
| BAR | QTY. | LENGTH | SHAPE | LOCATION |
| F601 | 28 | 5' 6" | — | FOOTING REINFORCEMENT |
| F602 | 6 | BB+1' 7" | — | FOOTING DOWELS |
| F403 | CC | 6' 10" | TIES | PEDESTAL TIES |
| F604 | 4 | 4' 11" | — | ROCK DOWELS |

TO DETERMINE THE NUMBER OF F403 TIES REQUIRED, SUBTRACT 6 INCHES FROM THE OVERALL LENGTH OF PEDESTAL, BB, MEASURED IN FEET. ROUND THE VALUE TO THE NEXT HIGHEST INTEGER, IN FEET, AND ADD 1 FOOT. THE RESULTING VALUE, WITH UNITS REMOVED, REPRESENTS THE REQUIRED QUANTITY.

BAR BENDING DIAGRAMS


BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

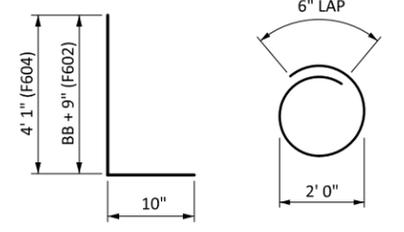

F602 & F604 F403

| SPREAD FOOTING FOUNDATION DATA | | | | | |
|--------------------------------|-------------------------|---------------------------|--------|-------|--------|
| POLE TYPE | MAST ARM LENGTH | SPREAD FOOTING DIMENSIONS | | | |
| | | A | B | C | D |
| TS15-TS25 | 15' 0", 20' 0" & 25' 0" | 8' 0" | 2' 6" | 3' 0" | 7' 6" |
| TS30-TS40 | 30' 0", 35' 0" & 40' 0" | 9' 6" | 3' 3" | 3' 0" | 9' 0" |
| TS45-TS55 STANDARD | 45' 0", 50' 0" & 55' 0" | 10' 3" | 3' 1½" | 4' 0" | 9' 9" |
| TS45-TS55 HEAVY | 45' 0", 50' 0" & 55' 0" | 11' 0" | 3' 6" | 4' 0" | 10' 6" |

| SPREAD FOOTING REINFORCEMENT | | | | | | | | | | |
|------------------------------|-----------------|--------|------------|--------|---------------------|--------|------------------|--------|-------|-------------------|
| BAR | MAST ARM LENGTH | | | | | | | | SHAPE | LOCATION |
| | 15' TO 25' | | 30' TO 40' | | 45' TO 55' STANDARD | | 45' TO 55' HEAVY | | | |
| | NO. | LENGTH | NO. | LENGTH | NO. | LENGTH | NO. | LENGTH | | |
| F601 | 16 | 7' 6" | 20 | 9' 0" | 22 | 9' 9" | 22 | 10' 6" | — | FOOTING TOP |
| F602 | 16 | 9' 6" | 20 | 11' 0" | 22 | 11' 9" | 22 | 12' 6" | — | FOOTING BOTTOM |
| F903 | 12 | 8' 0" | 12 | 8' 0" | 20 | 8' 0" | 20 | 8' 0" | — | PEDESTAL VERTICAL |
| F404 | 7 | 9' 8" | 7 | 9' 8" | --- | --- | --- | --- | ○ | PEDESTAL TIE |
| F405 | --- | --- | --- | --- | 7 | 12' 9" | 7 | 12' 9" | ○ | PEDESTAL TIE |

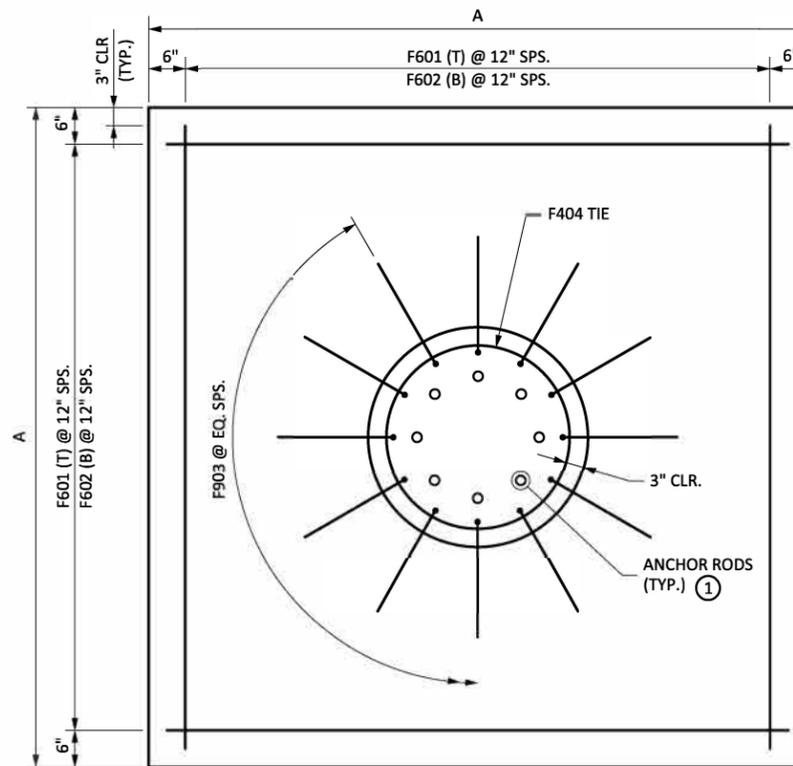

SPREAD FOOTING PLAN

GEOTECHNICAL PARAMETERS:

CONTACT MnDOT FOUNDATIONS UNIT FOR DETERMINATION OF SUBSURFACE INVESTIGATION REQUIREMENTS.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED ASSUMING THE WATER TABLE IS BELOW THE BOTTOM OF FOOTING ELEVATION OR LOWER AND THE IN-SITU SOIL PROPERTIES MEET OR EXCEED THE FOLLOWING MINIMUM VALUES:

SANDY SOILS
 UNIT WEIGHT = 125 PCF
 FRICTION ANGLE = 30°

CLAY SOILS
 UNIT WEIGHT = 125±10 PCF
 COHESION = 1000 PSF
 FRICTION ANGLE = 0°



A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

SPREAD FOOTINGS ARE DESIGNED BASED ON AN ALLOWABLE BEARING PRESSURE OF 2.50 KSF.

IF THE SOIL BEARING CAPACITY IS LESS THAN 2.50 KSF, OBTAIN APPROVAL FROM THE DISTRICT SOILS ENGINEER.

BAR BENDING DIAGRAMS


BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

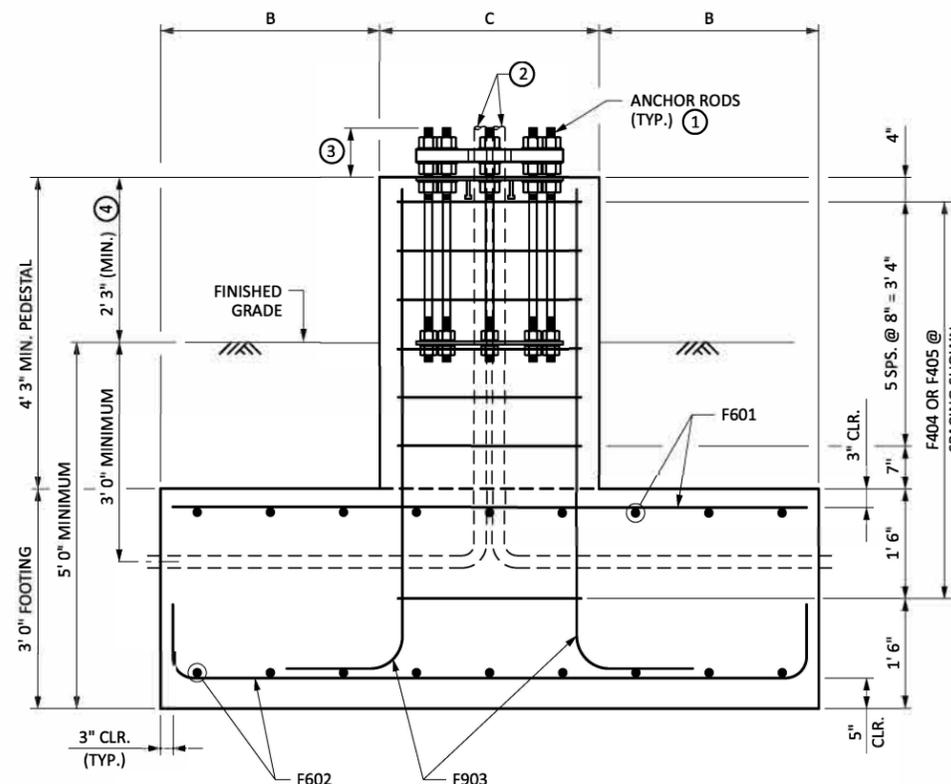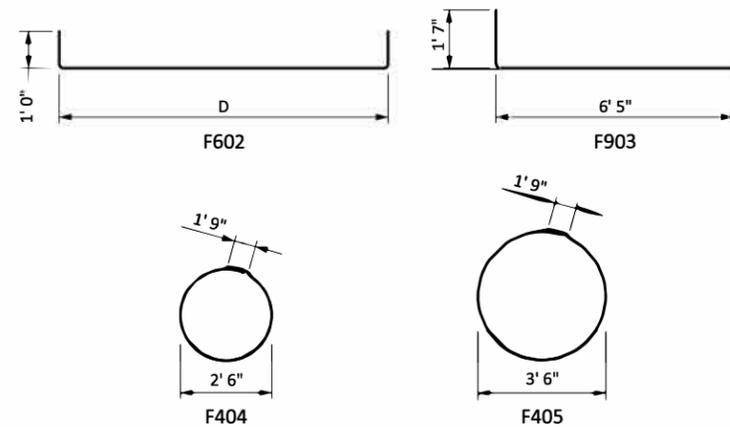

SPREAD FOOTING ELEVATION

NOTES:

- FURNISH AND INSTALL PREFORMED JOINT FILLER IN ACCORDANCE WITH SPEC. 3702 BETWEEN THE FOUNDATION AND SIDEWALK OR OTHER CONCRETE AREAS. THEN SEAL THE JOINT BETWEEN THE FOUNDATION AND SIDEWALK OR CONCRETE AREA WITH SILICONE SEALANT IN ACCORDANCE WITH SPEC 3722.
- FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461. CURE CONCRETE IN ACCORDANCE WITH SPEC. 2401.
- PROVIDE ¼" CHAMFER ON THE EXPOSED TOP EDGE OF THE FOUNDATION.
- EXCAVATE, BACKFILL, AND COMPACT AROUND THE FOUNDATION IN ACCORDANCE WITH SPEC. 2451.
- POSITION FOUNDATION CONDUITS INSIDE THE ANCHOR ROD ASSEMBLY. CAP ENDS UNTIL CABLES ARE INSTALLED.
- ALLOW THE FOUNDATION TO CURE FOR AT LEAST 7 DAYS AFTER CONCRETE POURING OPERATIONS BEFORE INSTALLING POLES.
- PROVIDE GRADE 60 DEFORMED BILLET REINFORCEMENT BARS IN ACCORDANCE WITH AASHTO M31 GRADE 60, SPEC. 2471, AND SPEC. 3301.
- SEE STANDARD PLATE 8124 FOR ANCHOR ROD ASSEMBLY DETAILS.
- SEE CONDUIT DETAIL ON SHEET 5 OF 5.
- SEE ANCHOR ROD PLACEMENT DETAIL ON SHEET 5 OF 5.
- INCREASE FOUNDATION PROJECTION AS REQUIRED TO PROVIDE A VERTICAL CLEARANCE FROM THE BOTTOM OF ALL SIGNS AND SIGNAL HEADS (INCLUDING BACKGROUND SHIELDS) TO THE PAVEMENT OF NOT LESS THAN 17.50' NOR MORE THAN 19.00'. INCREASE PEDESTAL LENGTH TO PROVIDE THE MINIMUM FOOTING BURIED DEPTH FOR FROST PROTECTION. INCREASE VERTICAL BAR LENGTH AND, IF NEEDED, ADD ADDITIONAL F404 OR F405 TO PROVIDE THE INDICATED COVER.

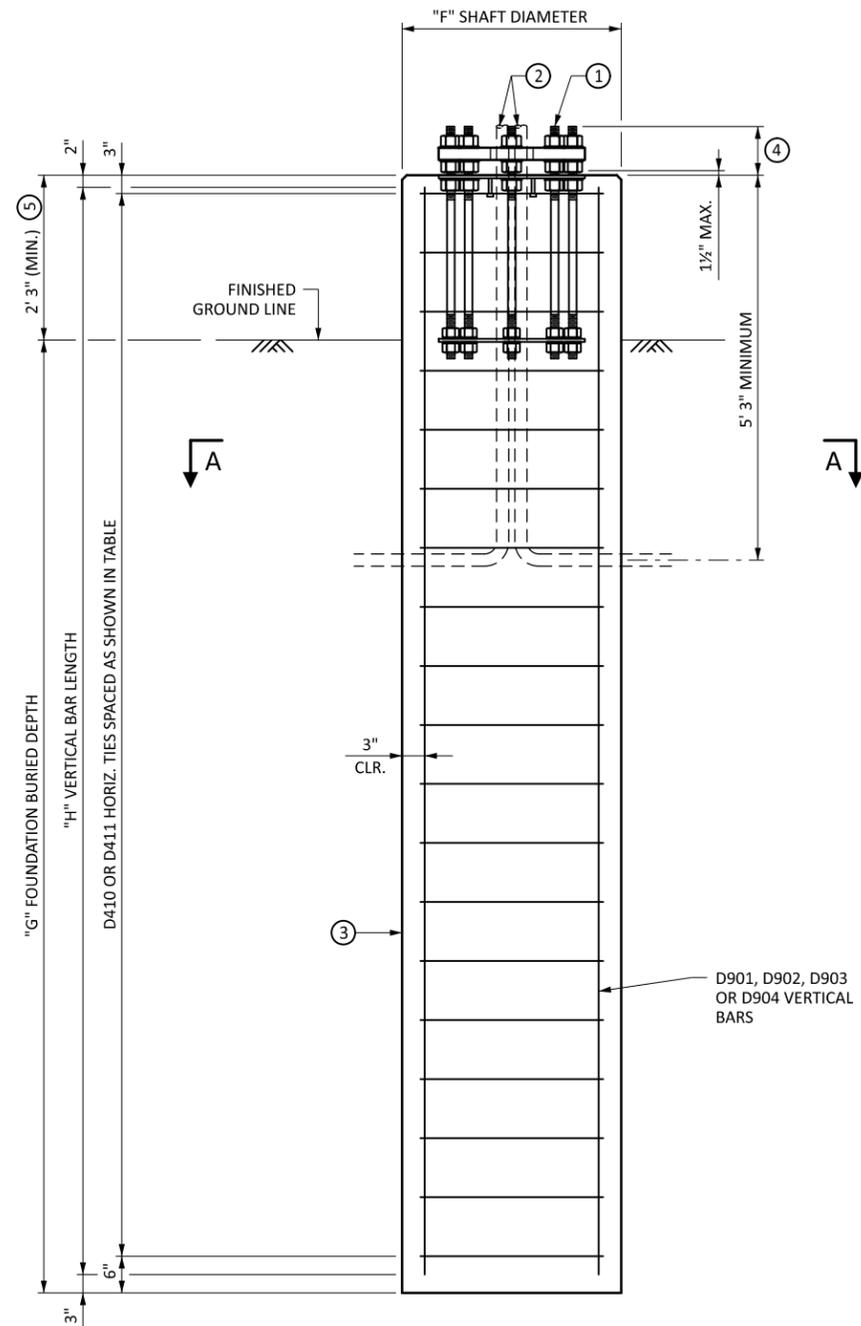


DRILLED SHAFT ELEVATION

FOUNDATION FOR 30' TO 40' MAST ARM SHOWN; OTHERS SIMILAR

| DRILLED SHAFT FOUNDATION DATA | | | | | |
|-------------------------------|-----------|-----------------|------------|---------------------|------------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | |
| | | 15' TO 25' | 30' TO 40' | 45' TO 55' STANDARD | 45' TO 55' HEAVY |
| SHAFT DIAMETER | F | 3' 0" | 3' 0" | 4' 0" | 4' 0" |
| FOUNDATION BURIED DEPTH | G | 9' 0" | 13' 0" | 11' 0" | 14' 0" |
| BOLT CIRCLE DIAMETER | ϕ_C | 1' 9" | 1' 9" | 1' 9" | 1' 9" |

| DRILLED SHAFT REINFORCEMENT | | | | | |
|------------------------------|-----------|-----------------|------------|---------------------|------------------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | |
| | | 15' TO 25' | 30' TO 40' | 45' TO 55' STANDARD | 45' TO 55' HEAVY |
| VERTICAL BAR MARK (#9) | - | D901 | D902 | D903 | D904 |
| VERTICAL BAR LENGTH | H | 10' 10" | 14' 10" | 12' 10" | 15' 10" |
| NUMBER OF VERTICAL BARS | - | 12 | 12 | 20 | 20 |
| HORIZONTAL TIE BAR MARK (#4) | - | D410 | D410 | D411 | D411 |
| NUMBER OF HORIZONTAL TIES | - | 12 | 19 | 14 | 17 |
| MAX. HORIZONTAL TIE SPACING | - | 12" | 10" | 12" | 12" |
| HORIZONTAL TIE LENGTH | - | 9' 8" | 9' 8" | 12' 9" | 12' 9" |

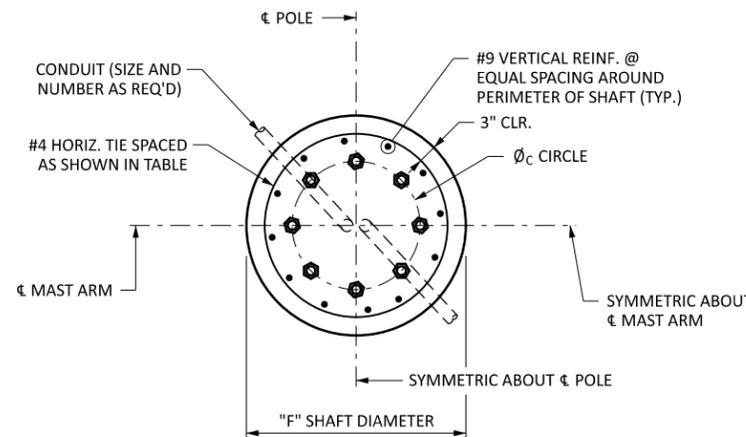

SECTION A-A

GEOTECHNICAL PARAMETERS:

CONTACT MnDOT FOUNDATIONS UNIT FOR DETERMINATION OF SUBSURFACE INVESTIGATION REQUIREMENTS.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED ASSUMING THE WATER TABLE IS 1.5' BELOW GRADE OR LOWER AND THE IN-SITU SOIL PROPERTIES MEET OR EXCEED THE FOLLOWING MINIMUM VALUES:

SANDY SOILS

UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°


CLAY SOILS

UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

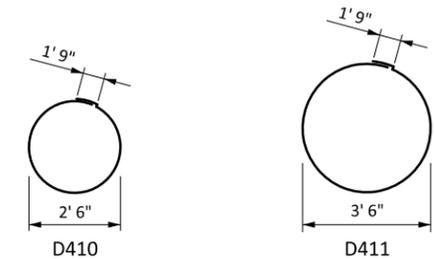

NOTES:

COLD CONCRETE CONSTRUCTION JOINTS ARE NOT PERMITTED.

GALVANIZE STEEL COMPONENTS IN ACCORDANCE WITH SPEC. 3394.

FURNISH AND INSTALL PREFORMED JOINT FILLER IN ACCORDANCE WITH SPEC. 3702 BETWEEN THE FOUNDATION AND SIDEWALK OR OTHER CONCRETE AREAS. THEN SEAL THE JOINT BETWEEN THE FOUNDATION AND SIDEWALK OR CONCRETE AREA WITH SILICONE SEALANT IN ACCORDANCE WITH SPEC 3722.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461. CURE CONCRETE IN ACCORDANCE WITH SPEC. 2401.

PROVIDE ¼" CHAMFER ON THE EXPOSED TOP EDGE OF THE FOUNDATION.

EXCAVATE, BACKFILL, AND COMPACT AROUND THE FOUNDATION IN ACCORDANCE WITH SPEC. 2451.

POSITION FOUNDATION CONDUITS INSIDE THE ANCHOR ROD ASSEMBLY. CAP ENDS UNTIL CABLES ARE INSTALLED.

ALLOW THE FOUNDATION TO CURE FOR AT LEAST 7 DAYS AFTER CONCRETE POURING OPERATIONS BEFORE INSTALLING POLES.

PROVIDE GRADE 60 DEFORMED BILLET REINFORCEMENT BARS IN ACCORDANCE WITH AASHTO M31 GRADE 60, SPEC. 2471, AND SPEC. 3301.

DRILLED SHAFT FOUNDATIONS ARE DESIGNED FOR THE CAST-IN-PLACE CONCRETE TO BE POURED DIRECTLY AGAINST THE SOILS SURROUNDING THE DRILLED SHAFT. CONCRETE FORMS ARE REQUIRED FOR THE 27" ABOVE THE FINISHED GROUNDLINE OR SIDEWALK AND PERMANENT CASING MAY BE USED FOR NO MORE THAN 25 PERCENT OF THE TOTAL FOUNDATION DEPTH BELOW FINISHED GRADE OR SIDEWALK. DO NOT USE PERMANENT CASING FOR MORE THAN 25 PERCENT OF THE ENTIRE DEPTH OF THE DRILLED SHAFT.

- ① SEE STANDARD PLATE 8124 FOR ANCHOR ROD ASSEMBLY DETAILS.
- ② SEE CONDUIT DETAIL ON SHEET 5 OF 5.
- ③ EXCAVATE TO NEAT LINES AND PLACE CONCRETE AGAINST UNDISTURBED SOIL.
- ④ SEE ANCHOR ROD PLACEMENT DETAIL ON SHEET 5 OF 5.
- ⑤ INCREASE FOUNDATION PROJECTION AS REQUIRED TO PROVIDE A VERTICAL CLEARANCE FROM THE BOTTOM OF ALL SIGNS AND SIGNAL HEADS (INCLUDING BACKGROUND SHIELDS) TO THE PAVEMENT OF NOT LESS THAN 17.50' NOR MORE THAN 19.00'. INCREASE OVERALL FOUNDATION LENGTH TO PROVIDE THE MINIMUM FOUNDATION BURIED DEPTH. INCREASE LONGITUDINAL BAR LENGTH TO PROVIDE THE INDICATED COVER.

LEAD EXPERT OFFICE
EDWARD LUTGEN
OFFICE DIRECTOR
BRIDGE OFFICE



POLE FOUNDATION TYPE TS
DRILLED SHAFT FOUNDATIONS FOR 15' TO 55' MAST ARMS

APPROVED: 02-21-2024
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.861

2 OF 5

STANDARD PLAN

STATE PROJ. NO.


SHEET NO.

TRUNK HWY.


TOTAL SHEETS

| SPREAD FOOTING FOUNDATION DATA | | | | |
|--------------------------------|-----------------|---------------------------|-------|--------|
| POLE TYPE | MAST ARM LENGTH | SPREAD FOOTING DIMENSIONS | | |
| | | A | B | C |
| TS60 | 60' 0" | 12' 6" | 4' 0" | 12' 0" |
| TS65 | 65' 0" | 13' 0" | 4' 3" | 12' 6" |
| TS70 | 70' 0" | 14' 0" | 4' 9" | 13' 6" |
| TS75 | 75' 0" | 15' 0" | 5' 3" | 14' 6" |
| TS80 | 80' 0" | 15' 6" | 5' 6" | 15' 0" |

| SPREAD FOOTING REINFORCEMENT | | | | | | | | | | | | |
|------------------------------|-----------------|--------|-----|---------|-----|---------|-----|---------|-----|--------|-------|-------------------|
| BAR | MAST ARM LENGTH | | | | | | | | | | SHAPE | LOCATION |
| | 60' | | 65' | | 70' | | 75' | | 80' | | | |
| | NO. | LENGTH | NO. | LENGTH | NO. | LENGTH | NO. | LENGTH | NO. | LENGTH | | |
| F706 | 48 | 12' 0" | 50 | 12' 6" | 54 | 13' 6" | 58 | 14' 6" | 60 | 15' 0" | — | FOOTING TOP |
| F707 | 48 | 14' 4" | 50 | 14' 10" | 54 | 15' 10" | 58 | 16' 10" | 60 | 17' 4" | — | FOOTING BOTTOM |
| F908 | 24 | 8' 1" | 24 | 8' 1" | 24 | 8' 1" | 24 | 8' 1" | 24 | 8' 1" | — | PEDESTAL VERTICAL |
| F409 | 10 | 14' 4" | 10 | 14' 4" | 10 | 14' 4" | 10 | 14' 4" | 10 | 14' 4" | ○ | PEDESTAL TIE |

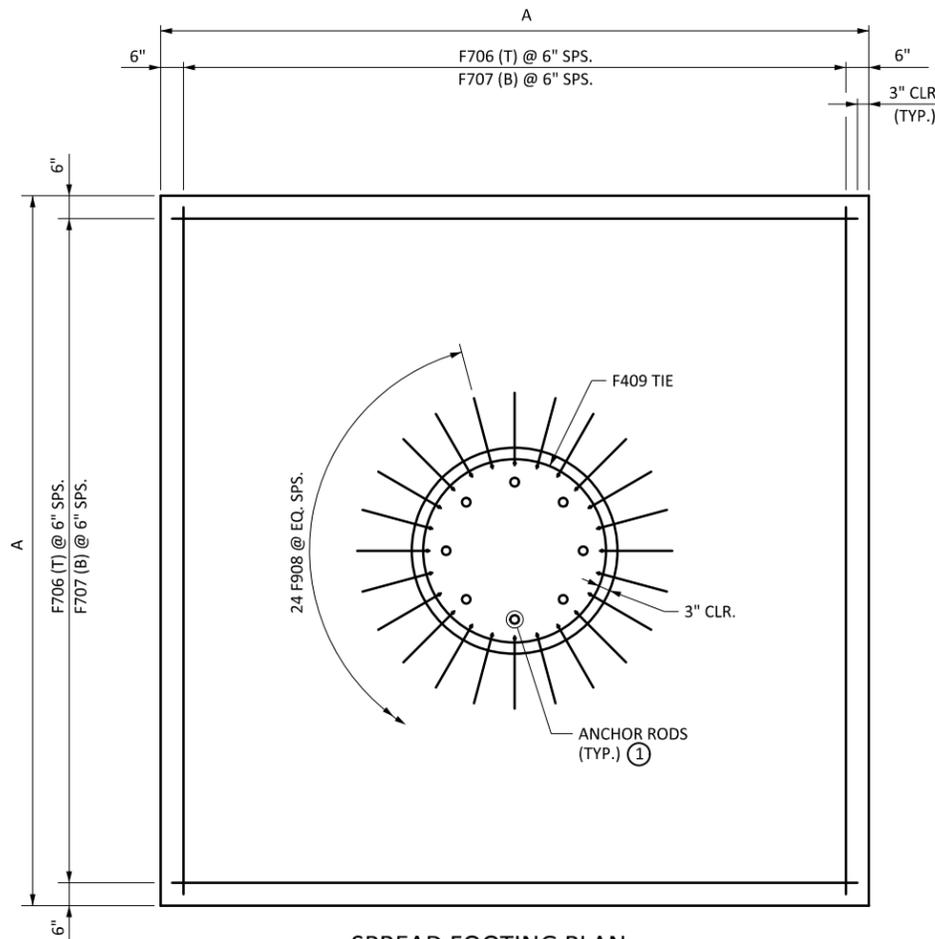

SPREAD FOOTING PLAN
80' MAST ARM FOUNDATION SHOWN; 60' TO 75' MAST ARM FOUNDATION SIMILAR

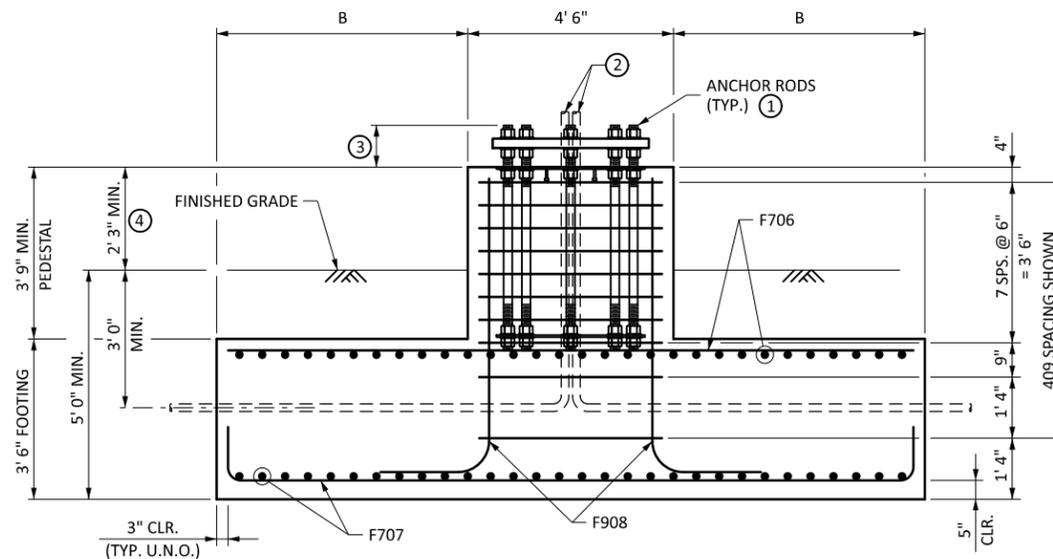

SPREAD FOOTING ELEVATION

GEOTECHNICAL PARAMETERS:

CONTACT MnDOT FOUNDATIONS UNIT FOR DETERMINATION OF SUBSURFACE INVESTIGATION REQUIREMENTS.

THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED ASSUMING THE WATER TABLE IS BELOW THE BOTTOM OF FOOTING ELEVATION OR LOWER AND THE IN-SITU SOIL PROPERTIES MEET OR EXCEED THE FOLLOWING MINIMUM VALUES:

SANDY SOILS

UNIT WEIGHT = 125 PCF
FRICTION ANGLE = 30°

CLAY SOILS

UNIT WEIGHT = 125±10 PCF
COHESION = 1000 PSF
FRICTION ANGLE = 0°


A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

SPREAD FOOTINGS ARE DESIGNED BASED ON AN ALLOWABLE BEARING PRESSURE OF 2.50 KSF.

IF THE SOIL BEARING CAPACITY IS LESS THAN 2.50 KSF, OBTAIN APPROVAL FROM THE DISTRICT SOILS ENGINEER.

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.

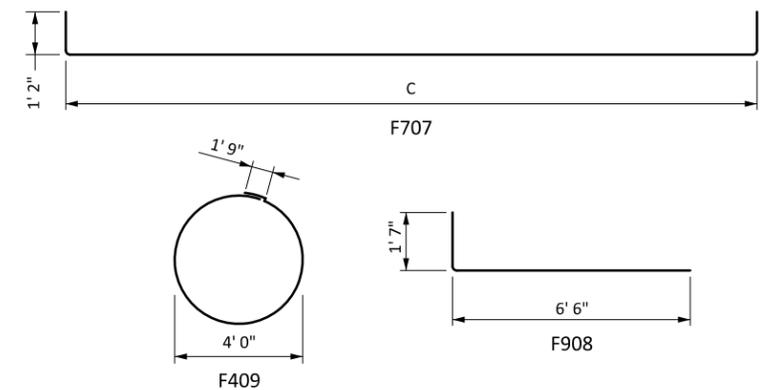

NOTES:

FURNISH AND INSTALL PREFORMED JOINT FILLER IN ACCORDANCE WITH SPEC. 3702 BETWEEN THE FOUNDATION AND SIDEWALK OR OTHER CONCRETE AREAS. THEN SEAL THE JOINT BETWEEN THE FOUNDATION AND SIDEWALK OR CONCRETE AREA WITH SILICONE SEALANT IN ACCORDANCE WITH SPEC 3722.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461. CURE CONCRETE IN ACCORDANCE WITH SPEC. 2401.

PROVIDE 3/8" CHAMFER ON THE EXPOSED TOP EDGE OF THE FOUNDATION.

EXCAVATE, BACKFILL, AND COMPACT AROUND THE FOUNDATION IN ACCORDANCE WITH SPEC. 2451.

POSITION FOUNDATION CONDUITS INSIDE THE ANCHOR ROD ASSEMBLY. CAP ENDS UNTIL CABLES ARE INSTALLED.

ALLOW THE FOUNDATION TO CURE FOR AT LEAST 7 DAYS AFTER CONCRETE POURING OPERATIONS BEFORE INSTALLING POLES.

PROVIDE GRADE 60 DEFORMED BILLET REINFORCEMENT BARS IN ACCORDANCE WITH AASHTO M31 GRADE 60, SPEC. 2471, AND SPEC. 3301.

- ① SEE STANDARD PLATE 8125 FOR ANCHOR ROD ASSEMBLY DETAILS.
- ② SEE CONDUIT DETAIL ON SHEET 5 OF 5.
- ③ SEE ANCHOR ROD PLACEMENT DETAIL ON SHEET 5 OF 5.
- ④ INCREASE FOUNDATION PROJECTION AS REQUIRED TO PROVIDE A VERTICAL CLEARANCE FROM THE BOTTOM OF ALL SIGNS AND SIGNAL HEADS (INCLUDING BACKGROUND SHIELDS) TO THE PAVEMENT OF NOT LESS THAN 17.50 FEET NOR MORE THAN 19.00 FEET. INCREASE PEDESTAL LENGTH TO PROVIDE THE MINIMUM FOOTING BURIED DEPTH FOR FROST PROTECTION. INCREASE VERTICAL BAR LENGTH TO PROVIDE THE INDICATED COVER.

LEAD EXPERT OFFICE
EDWARD LUTGEN
OFFICE DIRECTOR
BRIDGE OFFICE



POLE FOUNDATION TYPE TS
SPREAD FOOTING FOR 60' TO 80' MAST ARMS

APPROVED: 02-21-2024
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.861

3 OF 5

STANDARD PLAN

STATE PROJ. NO.

SHEET NO.

TRUNK HWY.

TOTAL SHEETS

PLOTTED/REVISED: 20-MAR-2024

PLOT NAME: s861_4_spn
 PATH & FILENAME: OTS\DesignStandards\Development\StandardPlans_DEV\800_Series\Publishing\s861_4_spn.dgn

| DRILLED SHAFT FOUNDATION DATA | | | | | | |
|-------------------------------|----------------|-----------------|--------|--------|--------|--------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| SHAFT DIAMETER | F | 4' 6" | 4' 6" | 4' 6" | 4' 6" | 4' 6" |
| FOUNDATION BURIED DEPTH | G | 14' 0" | 16' 6" | 19' 6" | 22' 0" | 24' 6" |
| BOLT CIRCLE DIAMETER | Ø _C | 2' 5" | 2' 5" | 2' 7" | 2' 9" | 2' 9" |

| DRILLED SHAFT REINFORCEMENT | | | | | | |
|------------------------------|-----------|-----------------|--------|--------|---------|--------|
| DESCRIPTION | DIMENSION | MAST ARM LENGTH | | | | |
| | | 60' | 65' | 70' | 75' | 80' |
| VERTICAL BAR MARK (#9) | - | D905 | D906 | D907 | D908 | D909 |
| VERTICAL BAR LENGTH | H | 15' 10" | 18' 4" | 21' 4" | 23' 10" | 26' 4" |
| NUMBER OF VERTICAL BARS | - | 24 | 24 | 24 | 24 | 24 |
| HORIZONTAL TIE BAR MARK (#4) | - | D412 | D412 | D412 | D412 | D412 |
| NUMBER OF HORIZONTAL TIES | - | 32 | 37 | 43 | 48 | 53 |
| MAX. HORIZONTAL TIE SPACING | - | 6" | 6" | 6" | 6" | 6" |
| HORIZONTAL TIE LENGTH | - | 14' 4" | 14' 4" | 14' 4" | 14' 4" | 14' 4" |

GEOTECHNICAL PARAMETERS:

CONTACT MnDOT FOUNDATIONS UNIT FOR DETERMINATION OF SUBSURFACE INVESTIGATION REQUIREMENTS.


THE FOUNDATION DIMENSIONS SHOWN ON THIS SHEET ARE DESIGNED ASSUMING THE WATER TABLE IS 1.5' BELOW GRADE OR LOWER AND THE IN-SITU SOIL PROPERTIES MEET OR EXCEED THE FOLLOWING MINIMUM VALUES:

| | |
|-----------------------|--------------------------|
| SANDY SOILS | CLAY SOILS |
| UNIT WEIGHT = 125 PCF | UNIT WEIGHT = 125±10 PCF |
| FRICITION ANGLE = 30° | COHESION = 1000 PSF |
| | FRICITION ANGLE = 0° |

A SPECIAL FOUNDATION DESIGN IS REQUIRED WHEN THE SPECIFIED VALUES, CONDITIONS, OR BOTH LISTED ABOVE ARE NOT MET.

BAR BENDING DIAGRAMS

BENT BAR DIMENSIONS GIVEN ARE OUT-TO-OUT. DETERMINE ACTUAL BAR LENGTHS BASED ON THE DETAIL DIMENSIONS SHOWN IN THE BAR BENDING DIAGRAMS.



NOTES:

COLD CONCRETE CONSTRUCTION JOINTS ARE NOT PERMITTED FOR DRILLED SHAFTS.

GALVANIZE STEEL COMPONENTS IN ACCORDANCE WITH SPEC. 3394.

FURNISH AND INSTALL PREFORMED JOINT FILLER IN ACCORDANCE WITH SPEC. 3702 BETWEEN THE FOUNDATION AND SIDEWALK OR OTHER CONCRETE AREAS. THEN SEAL THE JOINT BETWEEN THE FOUNDATION AND SIDEWALK OR CONCRETE AREA WITH SILICONE SEALANT IN ACCORDANCE WITH SPEC 3722.

FURNISH AND INSTALL 3G52 CONCRETE MIX IN ACCORDANCE WITH SPEC. 2461. CURE CONCRETE IN ACCORDANCE WITH SPEC. 2401.

PROVIDE 3/8" CHAMFER ON THE EXPOSED TOP EDGE OF THE FOUNDATION.

EXCAVATE, BACKFILL, AND COMPACT AROUND THE FOUNDATION IN ACCORDANCE WITH SPEC. 2451.


POSITION FOUNDATION CONDUITS INSIDE THE ANCHOR ROD ASSEMBLY. CAP ENDS UNTIL CABLES ARE INSTALLED.

ALLOW THE FOUNDATION TO CURE FOR AT LEAST 7 DAYS AFTER CONCRETE POURING OPERATIONS BEFORE INSTALLING POLES.

PROVIDE GRADE 60 DEFORMED BILLET REINFORCEMENT BARS IN ACCORDANCE WITH AASHTO M31 GRADE 60, SPEC. 2471, AND SPEC. 3301.


DRILLED SHAFT FOUNDATIONS ARE DESIGNED FOR THE CAST-IN-PLACE CONCRETE TO BE POURED DIRECTLY AGAINST THE SOILS SURROUNDING THE DRILLED SHAFT. CONCRETE FORMS ARE REQUIRED FOR THE 27" ABOVE THE FINISHED GROUNDLINE OR SIDEWALK AND PERMANENT CASING MAY BE USED FOR NO MORE THAN 25 PERCENT OF THE TOTAL FOUNDATION DEPTH BELOW FINISHED GRADE OR SIDEWALK. DO NOT USE PERMANENT CASING FOR MORE THAN 25 PERCENT OF THE ENTIRE DEPTH OF THE DRILLED SHAFT.

- ① SEE STANDARD PLATE 8125 FOR ANCHOR ROD ASSEMBLY DETAILS.
- ② SEE CONDUIT DETAIL ON SHEET 5 OF 5.
- ③ EXCAVATE TO NEAT LINES AND PLACE CONCRETE AGAINST UNDISTURBED SOIL.
- ④ SEE ANCHOR ROD PLACEMENT DETAIL ON SHEET 5 OF 5.
- ⑤ INCREASE FOUNDATION PROJECTION AS REQUIRED TO PROVIDE A VERTICAL CLEARANCE FROM THE BOTTOM OF ALL SIGNS AND SIGNAL HEADS (INCLUDING BACKGROUND SHIELDS) TO THE PAVEMENT OF NOT LESS THAN 17.50' NOR MORE THAN 19.00'. INCREASE OVERALL FOUNDATION LENGTH TO PROVIDE THE MINIMUM FOUNDATION BURIED DEPTH. INCREASE LONGITUDINAL BAR LENGTH TO PROVIDE THE INDICATED COVER.

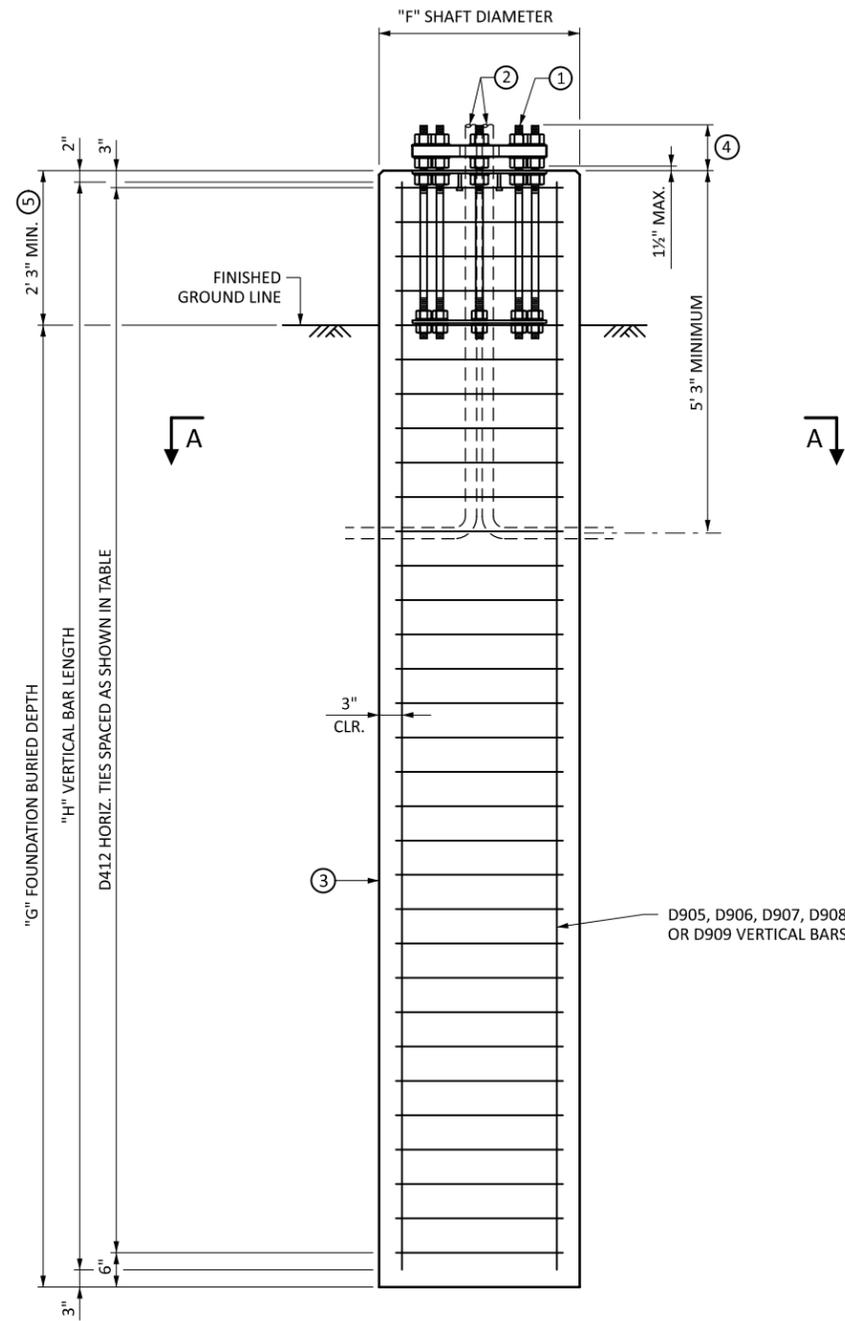

DRILLED SHAFT ELEVATION

FOUNDATION FOR 60' MAST ARM SHOWN; OTHERS SIMILAR

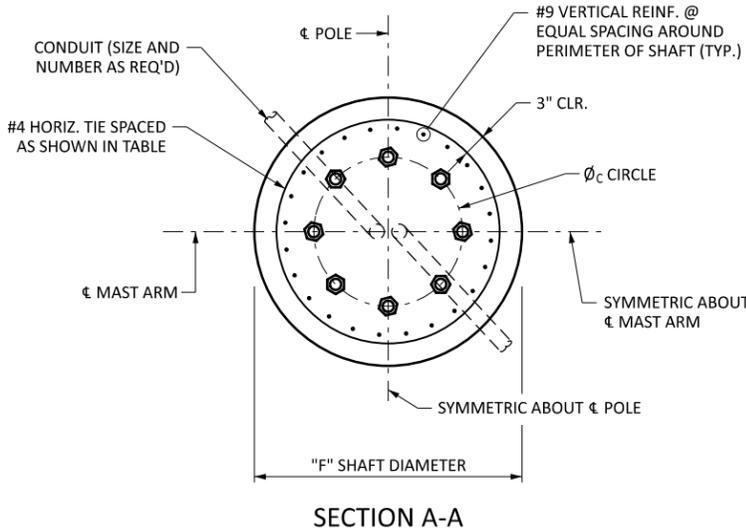

SECTION A-A

LEAD EXPERT OFFICE
 EDWARD LUTGEN
 OFFICE DIRECTOR
 BRIDGE OFFICE



POLE FOUNDATION TYPE TS
 DRILLED SHAFT FOUNDATIONS FOR 60' TO 80' MAST ARMS

APPROVED: 02-21-2024
 REVISED:


Thomas Styrbicki
 THOMAS STYRBICKI
 STATE DESIGN ENGINEER

STANDARD PLAN
 5-297.861

4 OF 5


STANDARD PLAN

| | |
|-----------------|--------------|
| STATE PROJ. NO. | SHEET NO. |
| TRUNK HWY. | TOTAL SHEETS |

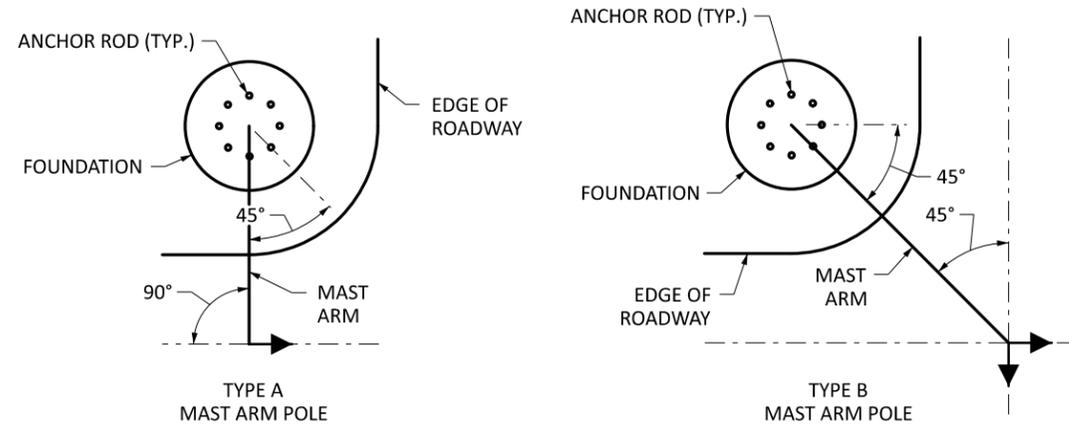


ANCHOR ROD PLACEMENT


| POLE TYPE | ANCHOR ROD | |
|-----------|-----------------|------------|
| | EMBEDMENT DEPTH | PROJECTION |
| | J | K |
| TS15-TS55 | 22" | 8" |
| TS60 | 34" | 8" |
| TS65 | 38" | 9" |
| TS70 | 42" | 10" |
| TS75 | 42" | 10" |
| TS80 | 48" | 11" |

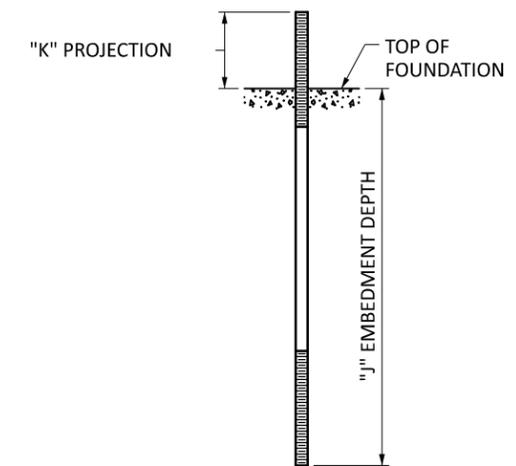

ANCHOR ROD PLACEMENT DETAIL

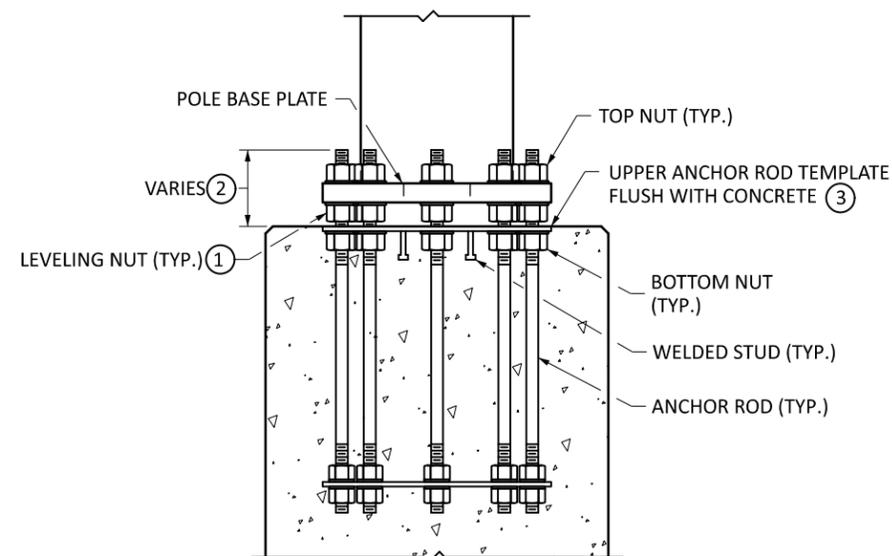

PARTIAL ELEVATION
SHOWING ANCHOR ROD ASSEMBLY AND HEX NUT POSITIONS AFTER POLE INSTALLATION

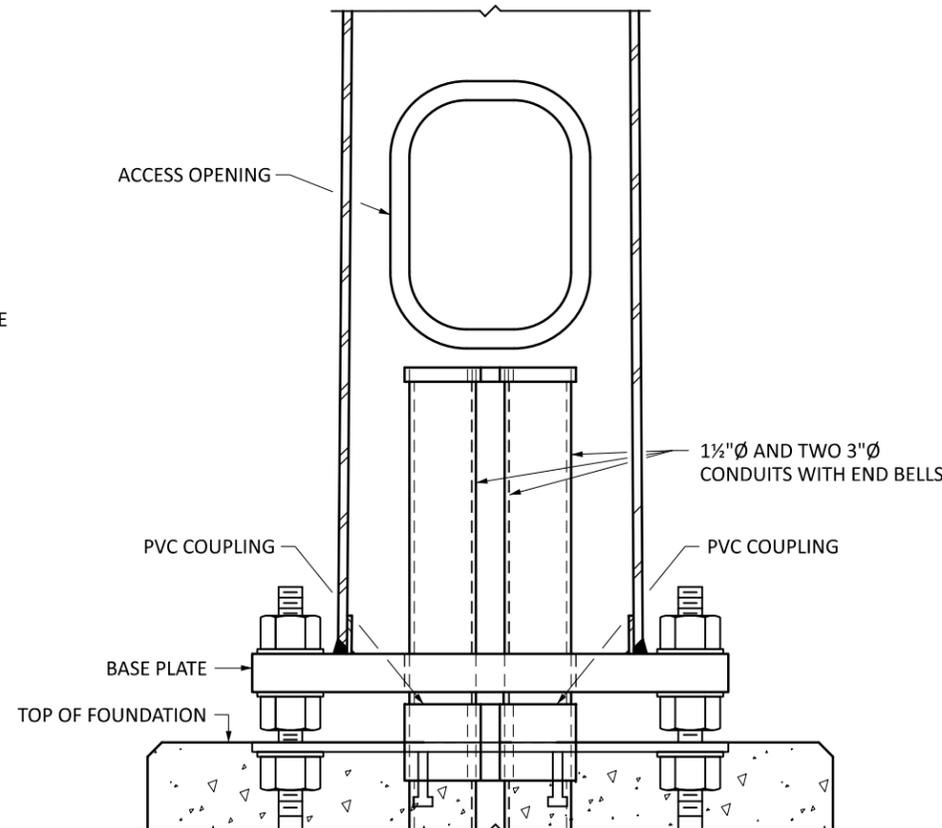

CONDUIT
FOUNDATION REINFORCEMENT NOT SHOWN FOR CLARITY

NOTES:

- ① USE THE LEVELING NUTS TO TEMPORARILY SECURE THE UPPER ANCHOR ROD TEMPLATE BEFORE CONCRETE OPERATIONS. LEAVE THE NUTS SECURE AGAINST THE TEMPLATE UNTIL POLE INSTALLATION. USE THE REQUIRED HARDWARE FOR DOUBLE-NUT ANCHOR ROD CONNECTIONS IN ACCORDANCE WITH SPEC 2545.
- ② PROTECT ANCHOR ROD THREADS AND LEVELING NUTS ABOVE THE ANCHOR ROD TEMPLATE FROM CONCRETE CONTAMINATION.
- ③ REMOVE SURFACE CONTAMINANTS AND APPLY SILICONE SEALANT TO THE UPPER TEMPLATE AROUND THE ANCHOR RODS, ANCHOR ROD HOLES, AND THE INNER AND OUTER EDGES WHERE THE PLATE MEETS CONCRETE. USE AN APPROVED SILICONE JOINT SEALANT FOUND ON MnDOT'S APL UNDER BRIDGE PRODUCTS.

LEAD EXPERT OFFICE
EDWARD LUTGEN
OFFICE DIRECTOR
BRIDGE OFFICE



POLE FOUNDATION TYPE TS
ANCHOR RODS AND CONDUIT DETAILS

APPROVED: 02-21-2024
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER








STANDARD PLAN
5-297.861

5 OF 5

STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

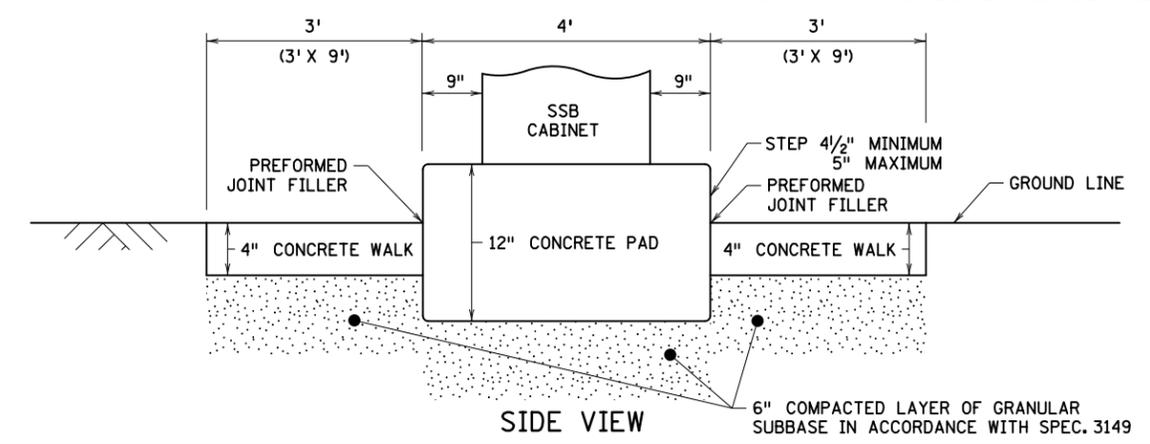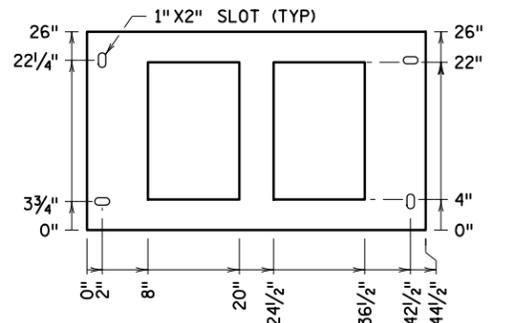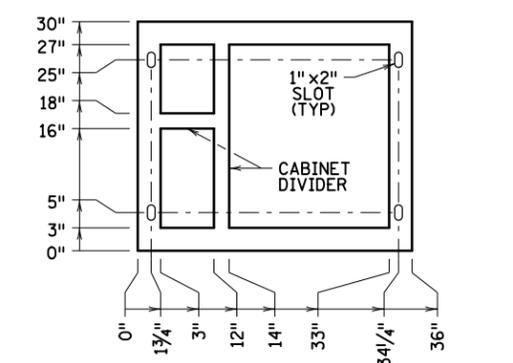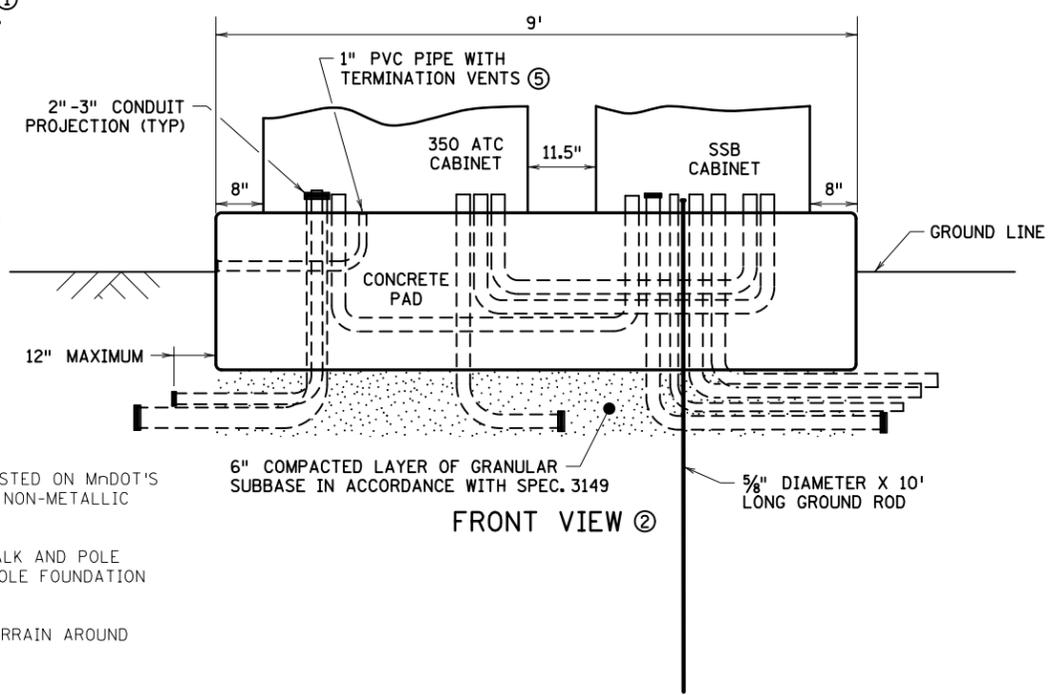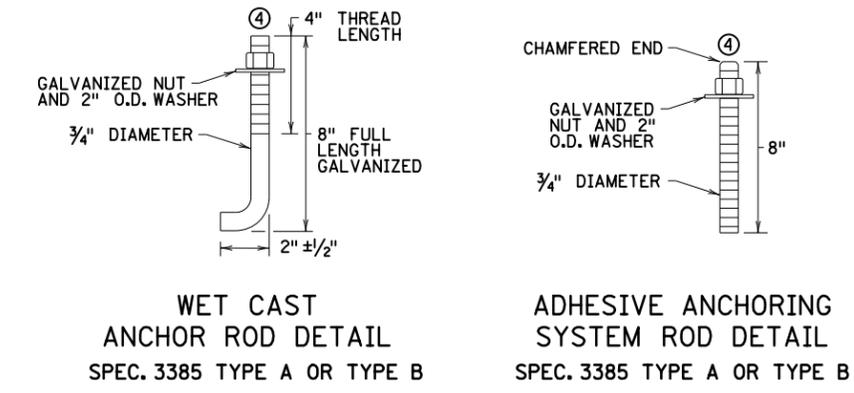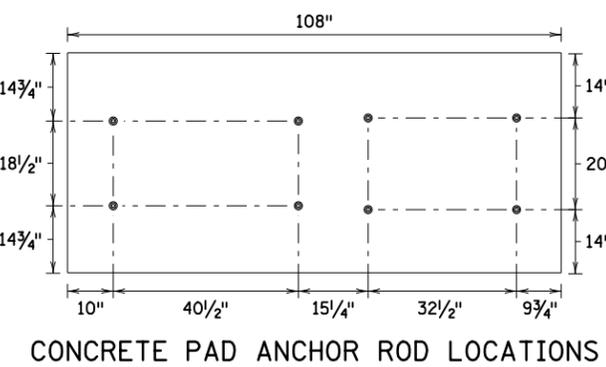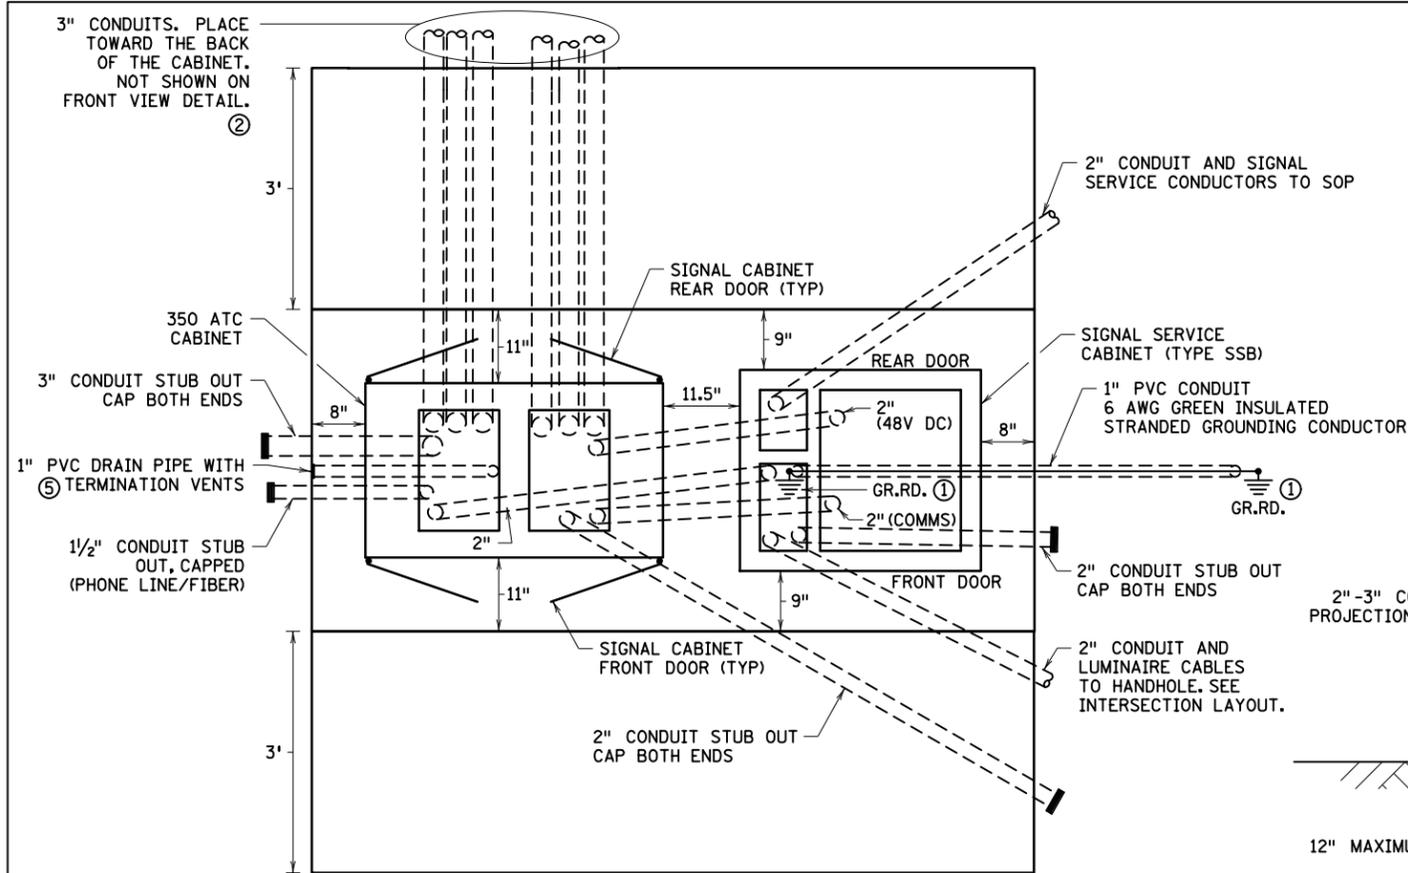

NOTES:

SEE INTERSECTION LAYOUT FOR CABLE INFORMATION.

FOR THE EQUIPMENT PAD, USE CONCRETE MIX 3G52 WITH APPROVED MACRO NON-METALLIC FIBERS FOR REINFORCEMENT. THESE ARE LISTED ON MnDOT'S APL UNDER CONCRETE "NONMETALLIC FIBERS (BRIDGE APPLICATIONS)." ADD FIBERS TO THE CONCRETE MIX IN ACCORDANCE WITH THE NON-METALLIC FIBERS MANUFACTURER'S INSTRUCTIONS AND CONTRACT DOCUMENTS.

FOR CONCRETE WALK, USE CONCRETE MIX 3G52. 3G52 CONCRETE MIX WITH NON-METALLIC FIBERS MAY BE USED FOR THE CONCRETE WALK AND POLE FOUNDATIONS. DO NOT USE NON-METALLIC FIBERS AS A SUBSTITUTE FOR THE REQUIRED REINFORCEMENT IN ACCORDANCE WITH THE POLE FOUNDATION STANDARD PLATES.

IF THE SITE CONDITIONS REQUIRE THE PAD TO BE PLACED ON A SLOPE, INCREASE THE THICKNESS OF THE PAD BY 6". SHAPE THE TERRAIN AROUND THE PAD FOR PROPER DRAINAGE.

3" MINIMUM CLEAR REQUIRED BETWEEN THE TOP AND BOTTOM SURFACES OF THE PAD AND THE OUTSIDE OF THE CONDUIT.

ENSURE THE CONDUITS FULLY ENCASED IN CONCRETE FROM ONE CABINET TO THE OTHER ARE PLACED AT THE CORRECT DEPTH AND LOCATION TO AVOID INTERFERENCE WITH THE INSTALLATION OF THE ANCHOR RODS.

① PLACE A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH THE GROUNDING ELECTRODE SYSTEM DETAIL ON STANDARD PLATE 8106 SHEET 3 EXCEPT FURNISH AND INSTALL 10' GROUND ROD ELECTRODES, 6 AWG GREEN INSULATED COPPER CONDUCTOR, AND EXOTHERMIC WELDED CONNECTIONS. IF A MnDOT TRAFFIC SIGNAL SYSTEM HAND HOLE IS LOCATED AT LEAST 6' APART AND NO MORE THAN 10' APART FROM THE GROUND ROD LOCATED IN THE EQUIPMENT PAD, THE SUPPLEMENTAL GROUND ROD MAY BE PLACED IN THAT HANDHOLE. USE A 12' GROUND ROD IN THE HAND HOLE INSTEAD OF A 10' GROUND ROD AND PULL A GREEN INSULATED 6 AWG CONDUCTOR IN THE CONDUIT GOING TO THAT HAND HOLE. IF THE REQUIRED TRAFFIC SIGNAL POLE HANDHOLE GROUND ROD IS LOCATED WITHIN THE SPECIFIED DISTANCE MENTIONED, BOND THE GREEN INSULATED 6 AWG CONDUCTOR TO THAT GROUND ROD.




② CONDUIT SIZE, QUANTITY, AND DIRECTION MAY VARY. FURNISH AND INSTALL CONDUITS AS SPECIFIED ON THE INTERSECTION LAYOUT PLAN SHEET. ENSURE CONDUITS ARE NOT PLACED DIRECTLY UNDER ANCHOR ROD LOCATIONS.

③ USE TEMPLATES WITH THE DIMENSIONS SHOWN INCLUDING OPENINGS, DIVIDERS, AND ANCHOR ROD HOLES AS A GUIDE TO ENSURE PROPER PLACEMENT OF THE CABINETS, CONDUITS, AND ANCHOR RODS. 350 BASE OPENINGS FOR TEMPLATE ARE SMALLER THAN THE ACTUAL BASE OPENINGS.

④ SET ANCHOR RODS IN THE CONCRETE PAD WITH A 2" TO 2 1/4" PROJECTION ABOVE THE PAD. FURNISH AND INSTALL ANCHOR RODS SHOWN ON THE ANCHOR ROD DETAIL IF WET-CASTING ANCHORS IN CONCRETE. FURNISH AND INSTALL ANCHOR RODS SHOWN ON THE ANCHOR ROD DETAIL IF USING AN ADHESIVE ANCHORING SYSTEM. WHEN USING THE ADHESIVE, FULLY INSERT THE 3/4" Ø X 8" LONG ANCHOR RODS INTO 6" DEEP DRILLED HOLES IN THE PAD AT THE LOCATIONS SHOWN ON THE ANCHOR ROD LOCATION DETAIL. DRILL THE HOLES TO THE DIAMETER SIZE SHOWN IN THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS FOR 3/4" Ø RODS. FOLLOW THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS INCLUDING CURE TIME AND GEL TIME BASED ON CONCRETE TEMPERATURE. USE AN APPROVED ADHESIVE ANCHORING SYSTEM LISTED ON MnDOT'S APL UNDER SIGNALS/PEDESTRIAN PUSHBUTTONS AND MOUNTING HARDWARE.

⑤ FURNISH AND INSTALL A DRAIN IN THE PAD USING 1" SCHEDULE 40 PVC PIPE. PLACE PVC TERMINATION VENT SCREEN DESIGNED FOR PVC PIPE AT EACH END OF THE PIPE. PROVIDE PVC TERMINATION VENTS WITH A STAINLESS STEEL SCREEN. ENSURE THE TERMINATION VENT SCREEN AND PIPE ARE FLUSH WITH THE TOP AND SIDE OF THE PAD AND PROTECT FROM CONCRETE INTRUSION BEFORE CONCRETE PLACEMENT OPERATIONS.

| | | | | | | |
|--|--|--|----------------------------------|---|-----------------------------------|---------------------------|
| LEAD EXPERT OFFICE BRIAN SORENSON STATE TRAFFIC ENGINEER OFFICE OF TRAFFIC ENGINEERING | 350 ATCC AND SSB CABINET EQUIPMENT PAD CAST IN PLACE | | APPROVED: 02-22-2022 REVISED: | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.869 | 1 OF 1 |
| | | | STANDARD PLAN | | STATE PROJ. NO. TRUNK HWY. | SHEET NO. TOTAL SHEETS |

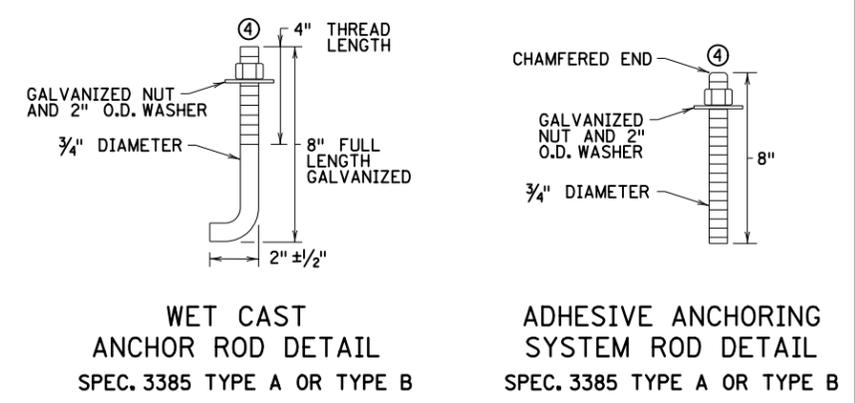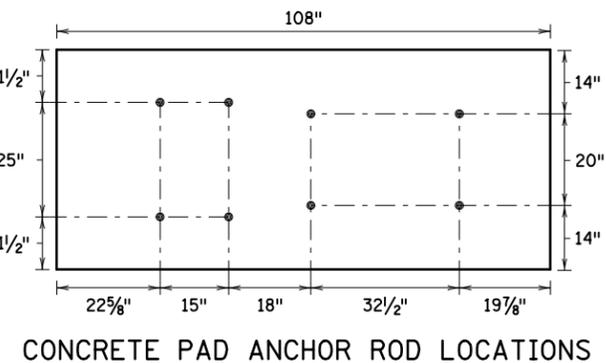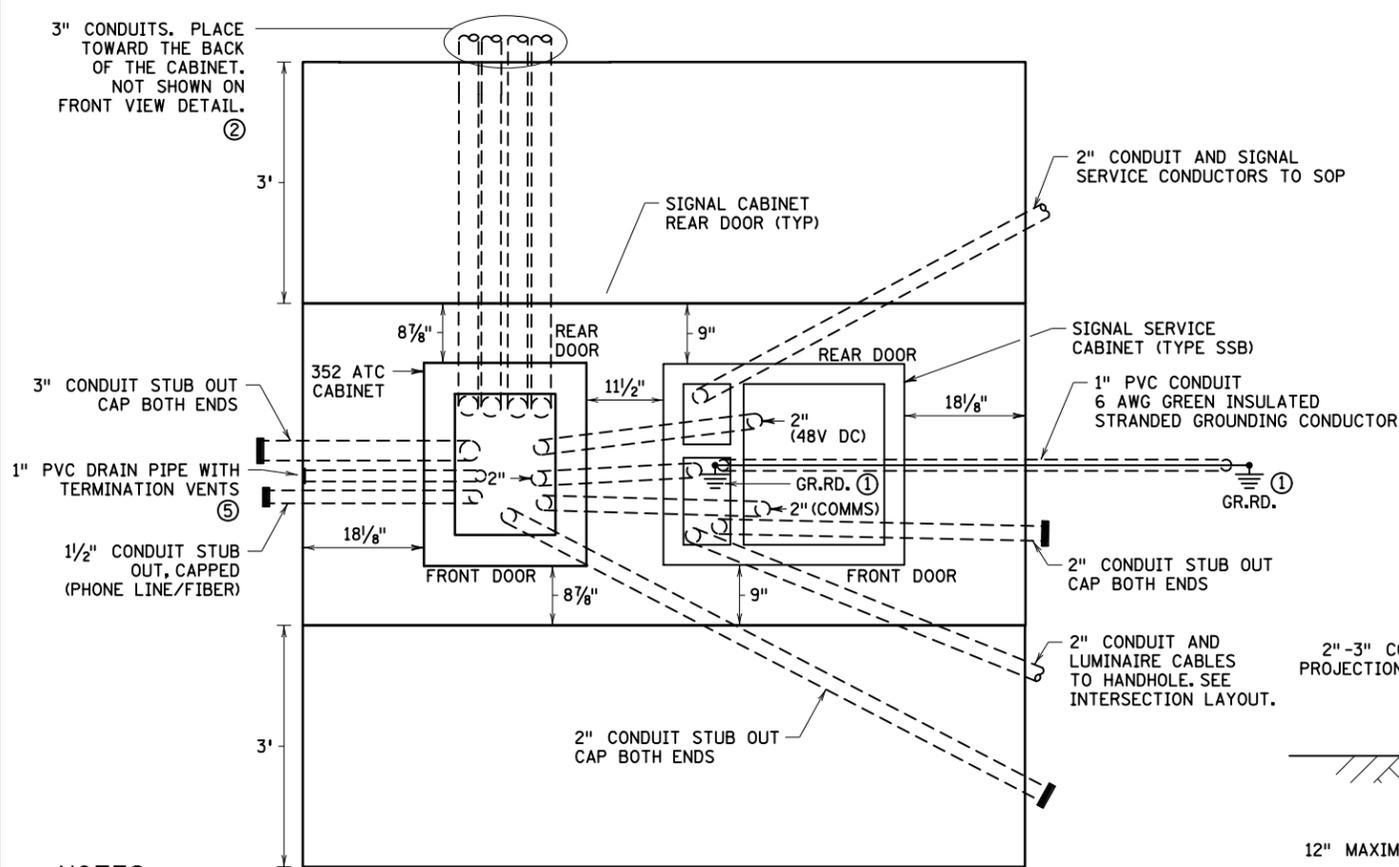

NOTES:

SEE INTERSECTION LAYOUT FOR CABLE INFORMATION.

FOR THE EQUIPMENT PAD, USE CONCRETE MIX 3G52 WITH APPROVED MACRO NON-METALLIC FIBERS FOR REINFORCEMENT. THESE ARE LISTED ON MnDOT'S APL UNDER CONCRETE "NONMETALLIC FIBERS (BRIDGE APPLICATIONS)." ADD FIBERS TO THE CONCRETE MIX IN ACCORDANCE WITH THE NON-METALLIC FIBERS MANUFACTURER'S INSTRUCTIONS AND CONTRACT DOCUMENTS.

FOR CONCRETE WALK, USE CONCRETE MIX 3G52. 3G52 CONCRETE MIX WITH NON-METALLIC FIBERS MAY BE USED FOR THE CONCRETE WALK AND POLE FOUNDATIONS. DO NOT USE NON-METALLIC FIBERS AS A SUBSTITUTE FOR THE REQUIRED REINFORCEMENT IN ACCORDANCE WITH THE POLE FOUNDATION STANDARD PLATES.

IF THE SITE CONDITIONS REQUIRE THE PAD TO BE PLACED ON A SLOPE, INCREASE THE THICKNESS OF THE PAD BY 6". SHAPE THE TERRAIN AROUND THE PAD FOR PROPER DRAINAGE.

3" MINIMUM CLEAR REQUIRED BETWEEN THE TOP AND BOTTOM SURFACES OF THE PAD AND THE OUTSIDE OF THE CONDUIT.

ENSURE THE CONDUITS FULLY ENCASED IN CONCRETE FROM ONE CABINET TO THE OTHER ARE PLACED AT THE CORRECT DEPTH AND LOCATION TO AVOID INTERFERENCE WITH THE INSTALLATION OF THE ANCHOR RODS.





① PLACE A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH THE GROUNDING ELECTRODE SYSTEM DETAIL ON STANDARD PLATE 8106 SHEET 3 EXCEPT FURNISH AND INSTALL 10' GROUND ROD ELECTRODES, 6 AWG GREEN INSULATED COPPER CONDUCTOR, AND EXOTHERMIC WELDED CONNECTIONS. IF A MnDOT TRAFFIC SIGNAL SYSTEM HAND HOLE IS LOCATED AT LEAST 6' APART AND NO MORE THAN 10' APART FROM THE GROUND ROD LOCATED IN THE EQUIPMENT PAD, THE SUPPLEMENTAL GROUND ROD MAY BE PLACED IN THAT HANDHOLE. USE A 12' GROUND ROD IN THE HAND HOLE INSTEAD OF A 10' GROUND ROD AND PULL A GREEN INSULATED 6 AWG CONDUCTOR IN THE CONDUIT GOING TO THAT HAND HOLE. IF THE REQUIRED TRAFFIC SIGNAL POLE HANDHOLE GROUND ROD IS LOCATED WITHIN THE SPECIFIED DISTANCE MENTIONED, BOND THE GREEN INSULATED 6 AWG CONDUCTOR TO THAT GROUND ROD.

② CONDUIT SIZE, QUANTITY, AND DIRECTION MAY VARY. FURNISH AND INSTALL CONDUITS AS SPECIFIED ON THE INTERSECTION LAYOUT PLAN SHEET. ENSURE CONDUITS ARE NOT PLACED DIRECTLY UNDER ANCHOR ROD LOCATIONS.




③ USE TEMPLATES WITH THE DIMENSIONS SHOWN INCLUDING OPENINGS, DIVIDERS, AND ANCHOR ROD HOLES AS A GUIDE TO ENSURE PROPER PLACEMENT OF THE CABINETS, CONDUITS, AND ANCHOR RODS. 350 BASE OPENINGS FOR TEMPLATE ARE SMALLER THAN THE ACTUAL BASE OPENINGS.

④ SET ANCHOR RODS IN THE CONCRETE PAD WITH A 2" TO 2 1/4" PROJECTION ABOVE THE PAD. FURNISH AND INSTALL ANCHOR RODS SHOWN ON THE ANCHOR ROD DETAIL IF WET-CASTING ANCHORS IN CONCRETE. FURNISH AND INSTALL ANCHOR RODS SHOWN ON THE ANCHOR ROD DETAIL IF USING AN ADHESIVE ANCHORING SYSTEM. WHEN USING THE ADHESIVE, FULLY INSERT THE 3/4" Ø X 8" LONG ANCHOR RODS INTO 6" DEEP DRILLED HOLES IN THE PAD AT THE LOCATIONS SHOWN ON THE ANCHOR ROD LOCATION DETAIL. DRILL THE HOLES TO THE DIAMETER SIZE SHOWN IN THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS FOR 3/4" Ø RODS. FOLLOW THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS INCLUDING CURE TIME AND GEL TIME BASED ON CONCRETE TEMPERATURE. USE AN APPROVED ADHESIVE ANCHORING SYSTEM LISTED ON MnDOT'S APL UNDER SIGNALS/PEDESTRIAN PUSHBUTTONS AND MOUNTING HARDWARE.

⑤ FURNISH AND INSTALL A DRAIN IN THE PAD USING 1" SCHEDULE 40 PVC PIPE. PLACE PVC TERMINATION VENT SCREEN DESIGNED FOR PVC PIPE AT EACH END OF THE PIPE. PROVIDE PVC TERMINATION VENTS WITH A STAINLESS STEEL SCREEN. ENSURE THE TERMINATION VENT SCREEN AND PIPE ARE FLUSH WITH THE TOP AND SIDE OF THE PAD AND PROTECT FROM CONCRETE INTRUSION BEFORE CONCRETE PLACEMENT OPERATIONS.

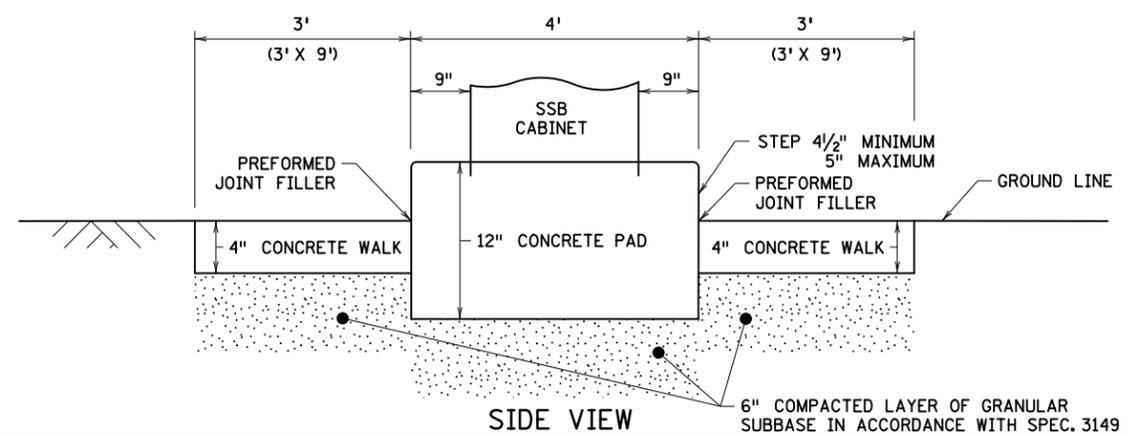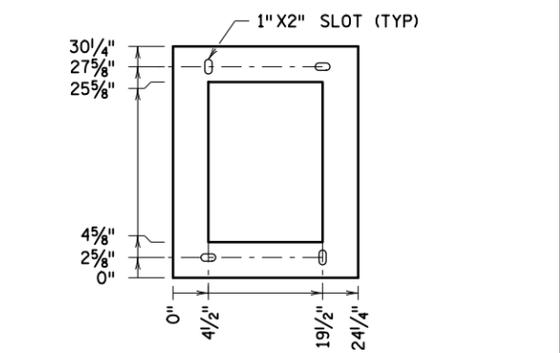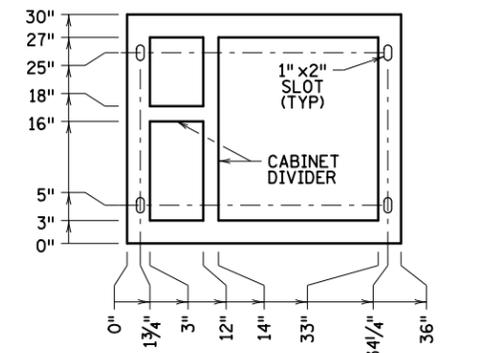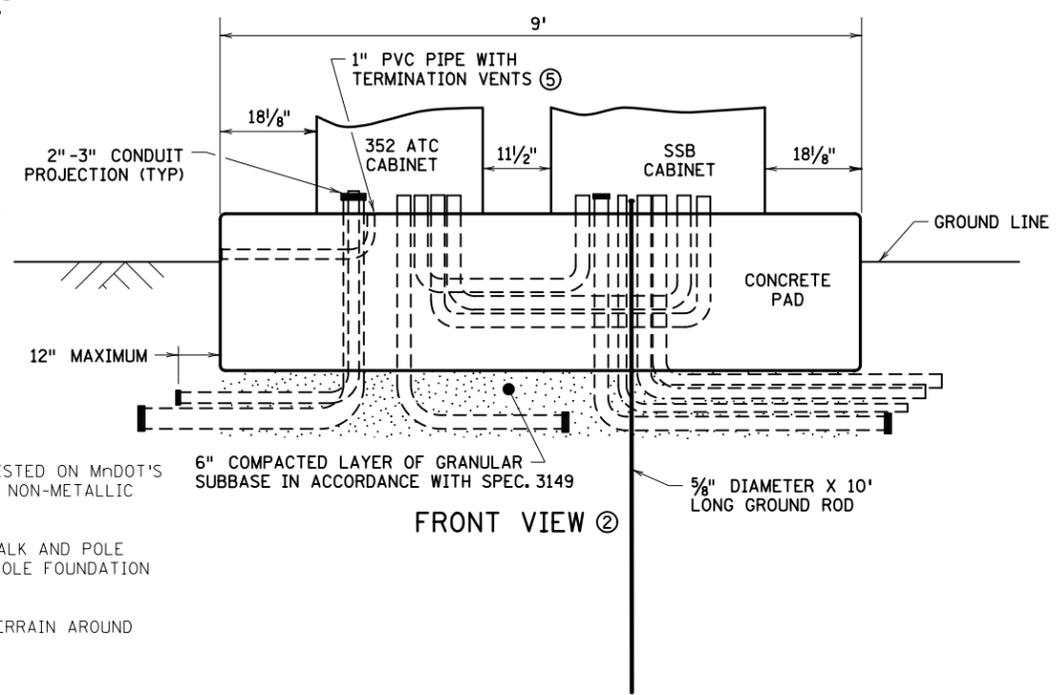


| | | | | | | |
|--|--|--|----------------------------------|---|-----------------------------------|--------|
| LEAD EXPERT OFFICE BRIAN SORENSON STATE TRAFFIC ENGINEER OFFICE OF TRAFFIC ENGINEERING | 352 ATCC AND SSB CABINET EQUIPMENT PAD CAST IN PLACE | | APPROVED: 02-22-2022 REVISED: | THOMAS STYRBICKI STATE DESIGN ENGINEER | STANDARD PLAN 5-297.870 | 1 OF 1 |
| | | | STANDARD PLAN | STATE PROJ. NO. TRUNK HWY. | SHEET NO. TOTAL SHEETS | |

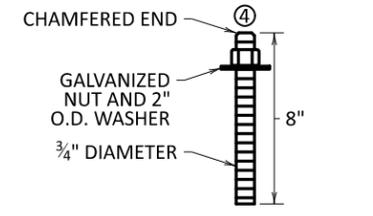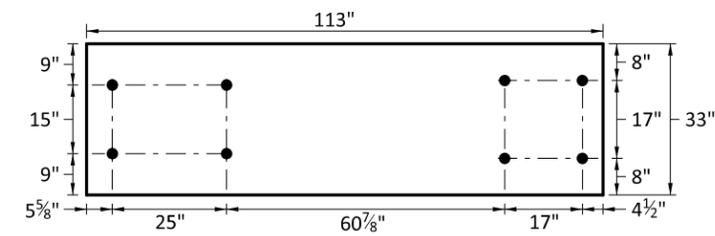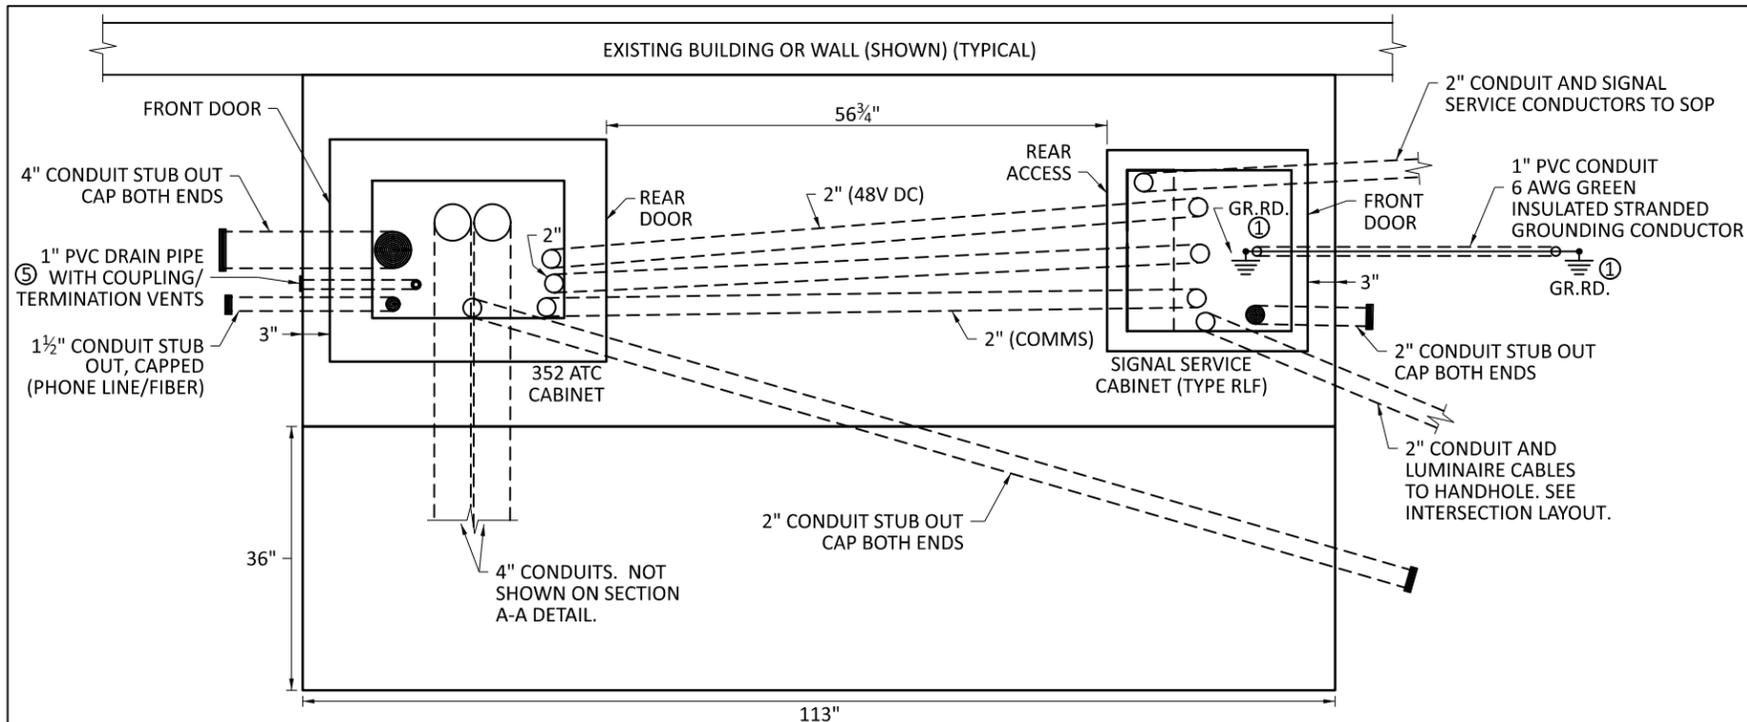


CONCRETE ANCHORAGE THREADED ROD LOCATIONS

CONCRETE ANCHORAGE THREADED ROD DETAIL SPEC. 3385 TYPE B

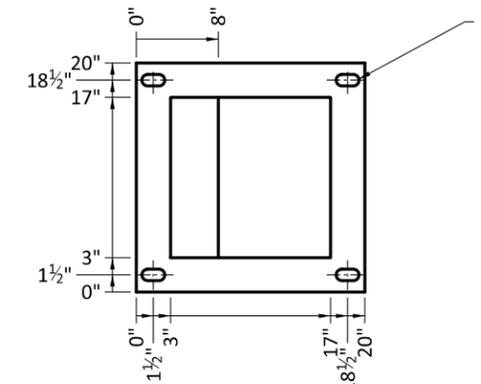


RLF CABINET BASE TEMPLATE ③

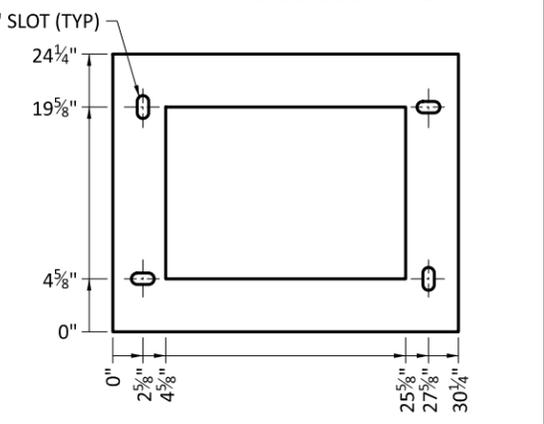


352 ATC CABINET BASE TEMPLATE ③

NOTES

- STUB-OUT LENGTH IS 12" BEYOND FOUNDATION OR CONCRETE WALK.
- SEE INTERSECTION LAYOUT FOR CABLE INFORMATION.
- FOR THE EQUIPMENT PAD, USE CONCRETE MIX 3G52 WITH APPROVED MACRO NON-METALLIC FIBERS FOR REINFORCEMENT. THESE ARE LISTED ON MnDOT'S APL UNDER CONCRETE "NONMETALLIC FIBERS (BRIDGE APPLICATIONS)." ADD FIBERS TO THE CONCRETE MIX IN ACCORDANCE WITH THE SPECIAL PROVISIONS.
- NON-METALLIC FIBERS MAY BE USED FOR THE POLE FOUNDATIONS. DO NOT USE NON-METALLIC FIBERS AS A SUBSTITUTE FOR THE REQUIRED REINFORCEMENT IN ACCORDANCE WITH THE POLE FOUNDATION STANDARD PLANS.
- IF THE SITE CONDITIONS REQUIRE PLACING THE PAD ON A SLOPE, INCREASE THE THICKNESS OF THE PAD BY 6". SHAPE THE TERRAIN AROUND THE PAD FOR PROPER DRAINAGE.
- ENSURE THE CONDUITS FROM ONE CABINET TO THE OTHER ARE FULLY ENCASED IN CONCRETE AND ARE PLACED AT THE CORRECT DEPTH AND LOCATION TO AVOID INTERFERENCE WITH THE INSTALLATION OF THE ANCHOR RODS.
- ① PLACE A GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH THE GROUNDING ELECTRODE SYSTEM DETAIL ON STANDARD PLATE 8106, SHEET 3, EXCEPT FURNISH AND INSTALL 10' GROUND ROD ELECTRODES, 6 AWG GREEN INSULATED COPPER CONDUCTOR, AND EXOTHERMIC WELDED CONNECTIONS. IF A MnDOT TRAFFIC SIGNAL SYSTEM HAND HOLE IS LOCATED AT LEAST 6' APART AND NO MORE THAN 10' APART FROM THE GROUND ROD LOCATED IN THE EQUIPMENT PAD, THE SUPPLEMENTAL GROUND ROD MAY BE PLACED IN THAT HANDHOLE. USE A 12' GROUND ROD IN THE HAND HOLE INSTEAD OF A 10' GROUND ROD AND PULL A GREEN INSULATED 6 AWG CONDUCTOR IN THE CONDUIT GOING TO THAT HAND HOLE. IF THE REQUIRED TRAFFIC SIGNAL POLE HANDHOLE GROUND ROD IS LOCATED WITHIN THE SPECIFIED DISTANCE MENTIONED, BOND THE GREEN INSULATED 6 AWG CONDUCTOR TO THAT GROUND ROD.
- ② CONDUIT SIZE, QUANTITY, AND DIRECTION MAY VARY. FURNISH AND INSTALL CONDUITS AS SPECIFIED ON THE INTERSECTION LAYOUT PLAN SHEET. ENSURE CONDUITS ARE NOT PLACED DIRECTLY UNDER ADHESIVE ANCHORAGE SYSTEM THREADED ROD LOCATIONS.
- ③ USE TEMPLATES WITH THE DIMENSIONS SHOWN INCLUDING OPENINGS, DIVIDERS, AND ADHESIVE ANCHORAGE SYSTEM THREADED ROD HOLES AS A GUIDE TO ENSURE PROPER PLACEMENT OF THE CABINETS, CONDUITS, AND RODS. 352 BASE OPENINGS FOR TEMPLATE ARE SMALLER THAN THE ACTUAL BASE OPENINGS.
- ④ PLACE ADHESIVE ANCHORAGE SYSTEM THREADED RODS WITH A 2" TO 2¹/₄" PROJECTION ABOVE THE PAD. INSERT THE RODS INTO HOLES IN THE PAD AT THE LOCATIONS SHOWN ON THE ADHESIVE ANCHORAGE SYSTEM THREADED ROD LOCATION DETAIL. DRILL THE HOLES AS SHOWN IN THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS. FOLLOW THE ADHESIVE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS INCLUDING CURE TIME AND GEL TIME BASED ON CONCRETE TEMPERATURE. USE AN APPROVED ADHESIVE ANCHORING SYSTEM LISTED ON MnDOT'S APL - SIGNALS.
- ⑤ FURNISH AND INSTALL A DRAIN IN THE PAD USING 1" PVC PIPE AND FITTINGS IN ACCORDANCE WITH ONE OF THE FOLLOWING:
 A) DMV PIPE ASTM D 1785, ASTM D 2665 NSF STANDARD 14 AND NSF STANDARD 61.
 B) SDR-26 ASTM D 1784, ASTM D2241 NSF STANDARD 14 AND NSF STANDARD 61.
 PLACE COUPLINGS AT BOTH ENDS OF THE PIPE, FLUSH WITH THE TOP AND SIDE OF PAD AND FURNISH AND INSTALL PREMANUFACTURED PVC TERMINATION VENT CAPS WITH STAINLESS STEEL SCREEN INSIDE THE COUPLINGS. PROTECT FROM CONCRETE INTRUSION BEFORE CONCRETE PLACEMENT OPERATIONS, DO NOT USE ELECTRICAL CONDUIT FOR A DRAIN IN THE PAD.

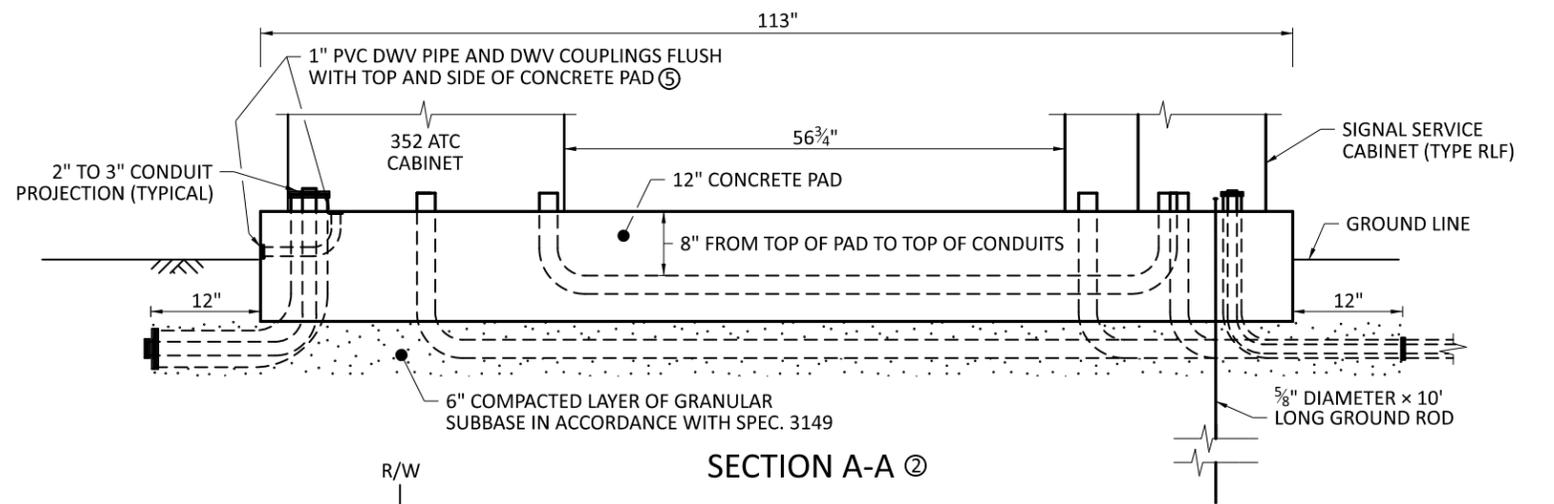


SECTION A-A ②

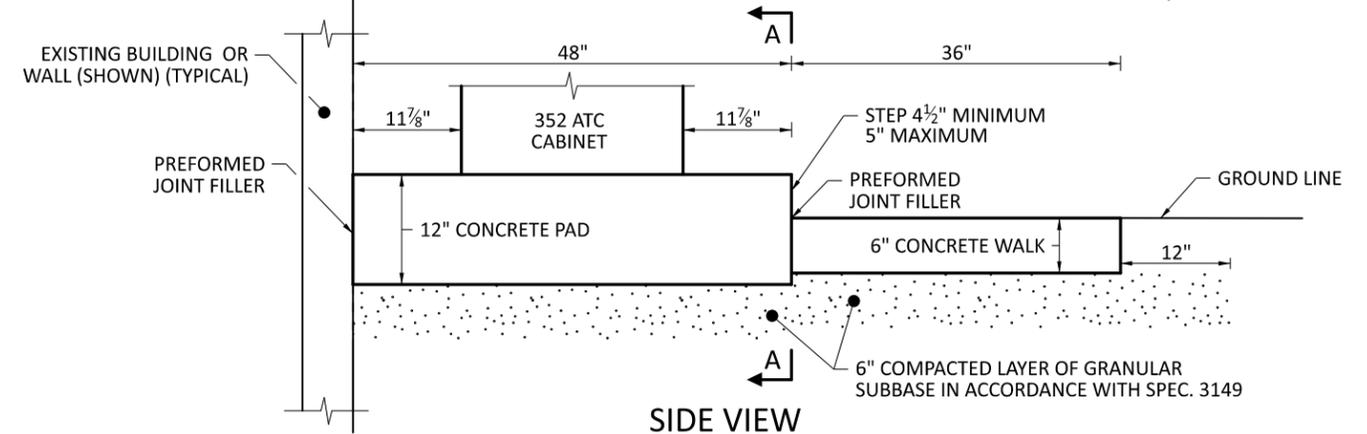


SIDE VIEW


| | | | | | | |
|--|--|--|---|--|---------------------------------------|---------------|
| | <p>LEAD EXPERT OFFICE</p> <p>BRIAN SORENSON</p> <p>STATE TRAFFIC ENGINEER</p> <p>OFFICE OF TRAFFIC ENGINEERING</p> | <p>352 ATCC AND RLF CABINET EQUIPMENT PAD</p> <p>CAST-IN-PLACE</p> | <p>APPROVED: 12-01-2025</p> <p>REVISED:</p> | <p>THOMAS STYRBICKI</p> <p>STATE DESIGN ENGINEER</p> | <p>STANDARD PLAN</p> <p>5-297.871</p> | <p>1 OF 1</p> |
| | <p>STANDARD PLAN</p> | | <p>STATE PROJ. NO.</p> <p>TRUNK HWY.</p> | <p>SHEET NO.</p> <p>TOTAL SHEETS</p> | | |

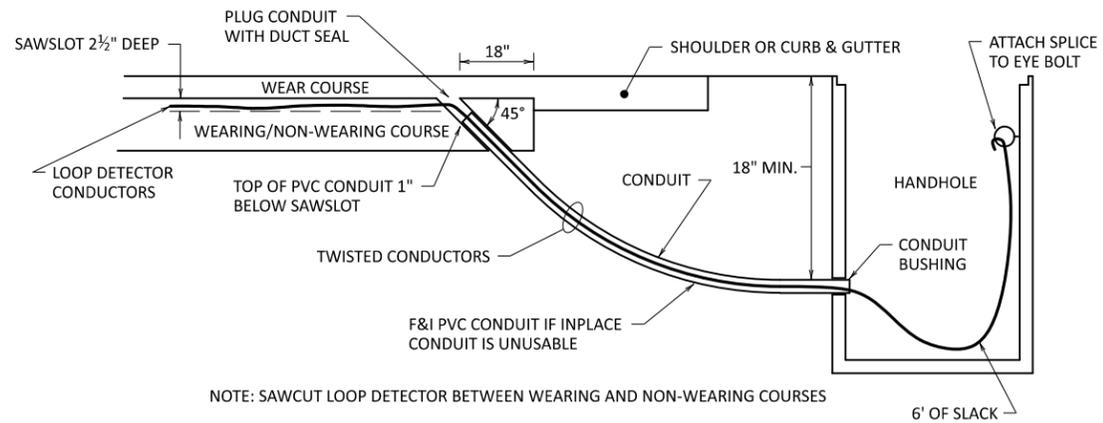


LOOP/HANDHOLE INSTALLATION FOR MILL & OVERLAY CONSTRUCTION

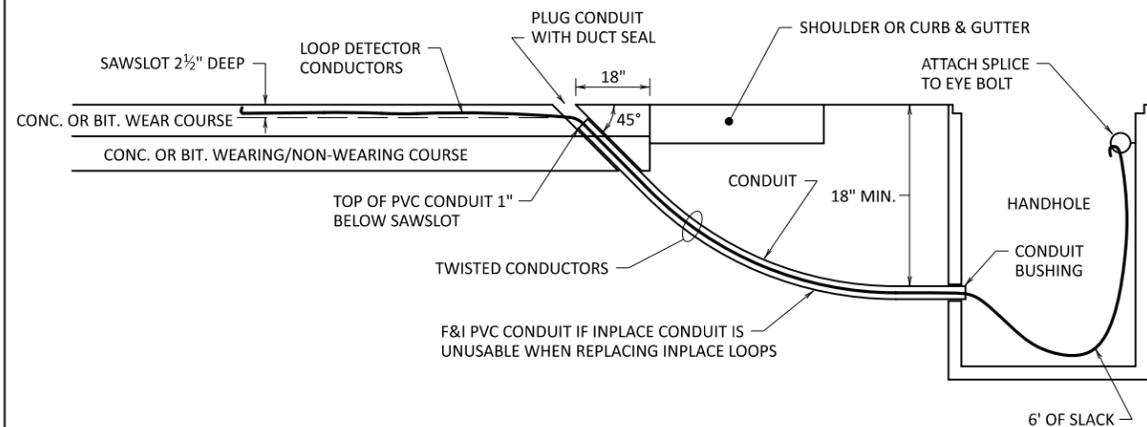


LOOP/HANDHOLE INSTALLATION FOR INPLACE ROADWAYS

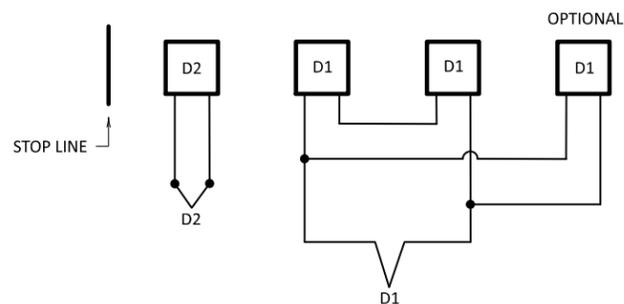


MULTIPLE LOOP SERIES HOOKUP

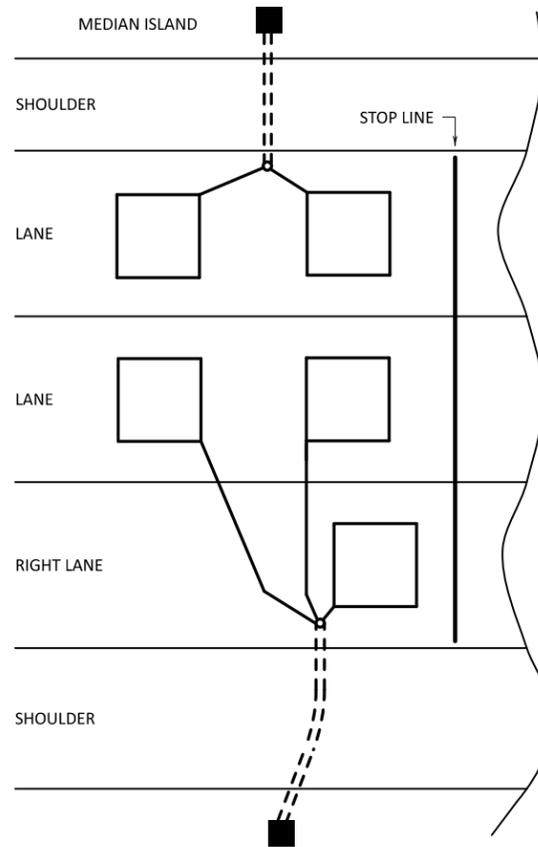

APPROACH DETECTORS

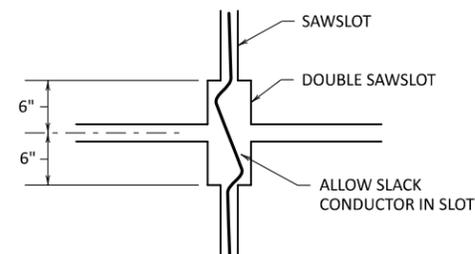

JOINT/CRACK INSTALLATION

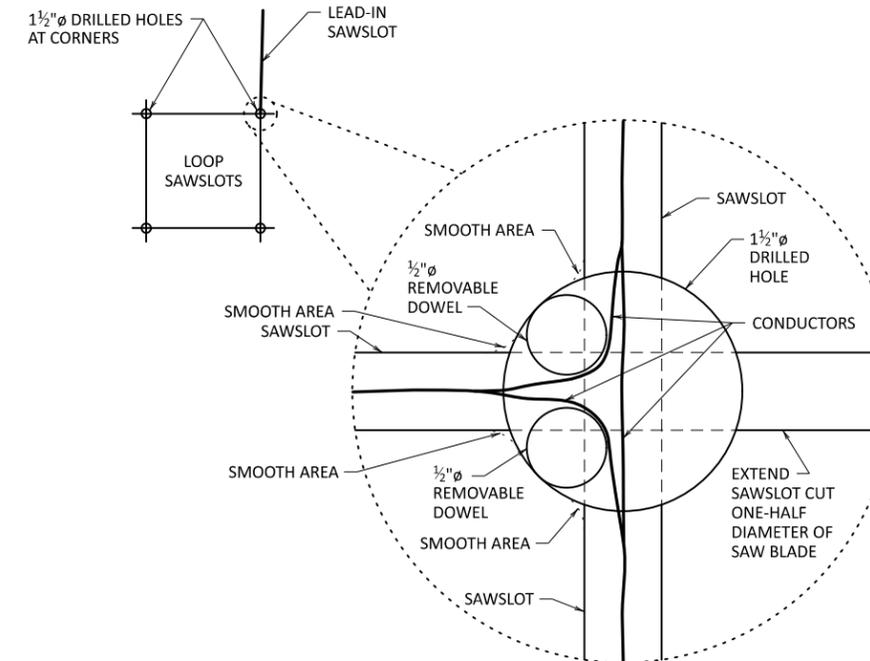

DRILL SAWCUT CORNERS

NOTES:

- FURNISH AND INSTALL LOOP DETECTORS IN ACCORDANCE WITH CONTRACT DOCUMENTS.
- FOR ROADWAYS BEING RESURFACED, SAWCUT AND REPLACE SEALANT MATERIAL BEFORE THE BITUMINOUS WEARING COURSE IS PLACED UNLESS OTHERWISE APPROVED BY THE ENGINEER TO NOT PLACE THE LOOP DETECTORS UNTIL AFTER PAVEMENT MARKINGS AND LANE STRIPING HAVE BEEN ESTABLISHED.
- SWEEP, WASH, AND BLOW CLEAR OF DIRT AND DEBRIS THE SURFACE AREA BEFORE SAWCUTTING.
- MARK THE LOOP DETECTORS AND HOME RUN ON THE PAVEMENT.
- MARK SAWCUTS AT A UNIFORM DEPTH BETWEEN 2 3/4" AND 2 3/4" AND 1/8" WIDER THAN THE OUTER DIAMETER OF THE TUBING.
- AVOID CROSSING CONCRETE JOINTS AND CRACKS WHENEVER POSSIBLE. USE THE JOINT CRACK DETAIL SHOWN WHEN A JOINT OR CRACK CROSSING CANNOT BE AVOIDED.
- SAWCUT LOOP CORNERS SQUARE AND WITH A 1 1/2" DIAMETER DRILL BIT, DRILL EACH CORNER 1/2" DEEPER THAN THE SAW CUT. ENSURE THE INSIDE CORNERS HAVE BEEN ROUNDED TO PREVENT DAMAGE TO THE CABLE.
- CLEAN AND FLUSH THE SAWSLOTS OF FOREIGN MATERIAL USING A COMBINATION OF COMPRESSED AIR AND WATER AND DRY THE SAWSLOTS WITH COMPRESSED AIR BEFORE PLACING THE LOOP DETECTOR CABLE.
- APPLY A BEAD OF APPROVED LOOP DETECTOR SEALANT INTO THE SAWCUT SLOT AND WITHIN 6" OF WHERE THE CONDUITS RUN FROM THE END OF THE SAWCUT SLOT TO THE ADJACENT HANDHOLE BEFORE INSERTING THE LOOP DETECTOR CONDUCTORS.
- ENSURE LOOP CONDUCTORS ARE CLEAN AND DRY BEFORE PLACING INTO THE SAWSLOT.
- PUSH THE LOOP DETECTOR CONDUCTORS TO THE BOTTOM OF THE SAWSLOT USING A BLUNT INSTRUMENT TO PREVENT DAMAGE TO THE CONDUCTORS.
- AFTER PLACING THE CONDUCTORS INTO THE SAWSLOT, PLACE 3/4"x2" BACKER ROD IN 2' INTERVALS INTO THE SAWSLOT TO ENSURE CONDUCTORS STAY AT THE BOTTOM OF THE SAWSLOT.
- TWIST THE LOOP DETECTOR CONDUCTORS FROM THE DETECTOR TO THE HANDHOLE IN THREE TURNS PER FOOT. FROM THE END OF THE SAWSLOT TO THE ADJACENT HAND HOLE, FURNISH AND INSTALL A 3/4" OR LARGER PVC CONDUIT IN ACCORDANCE WITH NEC CONDUIT FILL RATIO FOR THE NUMBER LOOP DETECTORS CONDUCTORS PLACED IN ONE CONDUIT. PLACE THE TWISTED CONDUCTORS INSIDE THE CONDUIT.
- TO PREVENT LOOP DETECTOR SEALANT FROM ENTERING INTO THE CONDUIT, USE DUCT SEAL OR OBTAIN ENGINEERS APPROVAL TO USE ALTERNATE SEAL.
- DO NOT PLACE LOOP LEADS ACROSS CONCRETE PAVEMENT TRANSVERSE JOINTS. MOVE THE LOOP TO THE NEXT PANEL AND PLACE A SEPARATE CONDUIT TO THE HAND HOLE IF LOOPS WILL NOT FIT IN ONE PANEL, AND MAINTAIN SEPARATIONS SHOWN.
- SEE PLAN LAYOUT FOR ACTUAL DETECTOR SIZE AND PLACEMENT LOCATION.

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

SAWCUT LOOP DETECTORS

APPROVED:
10-04-2024

THOMAS STYRBICKI
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.873


1 OF 1




STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.


SHEET NO.
TOTAL SHEETS

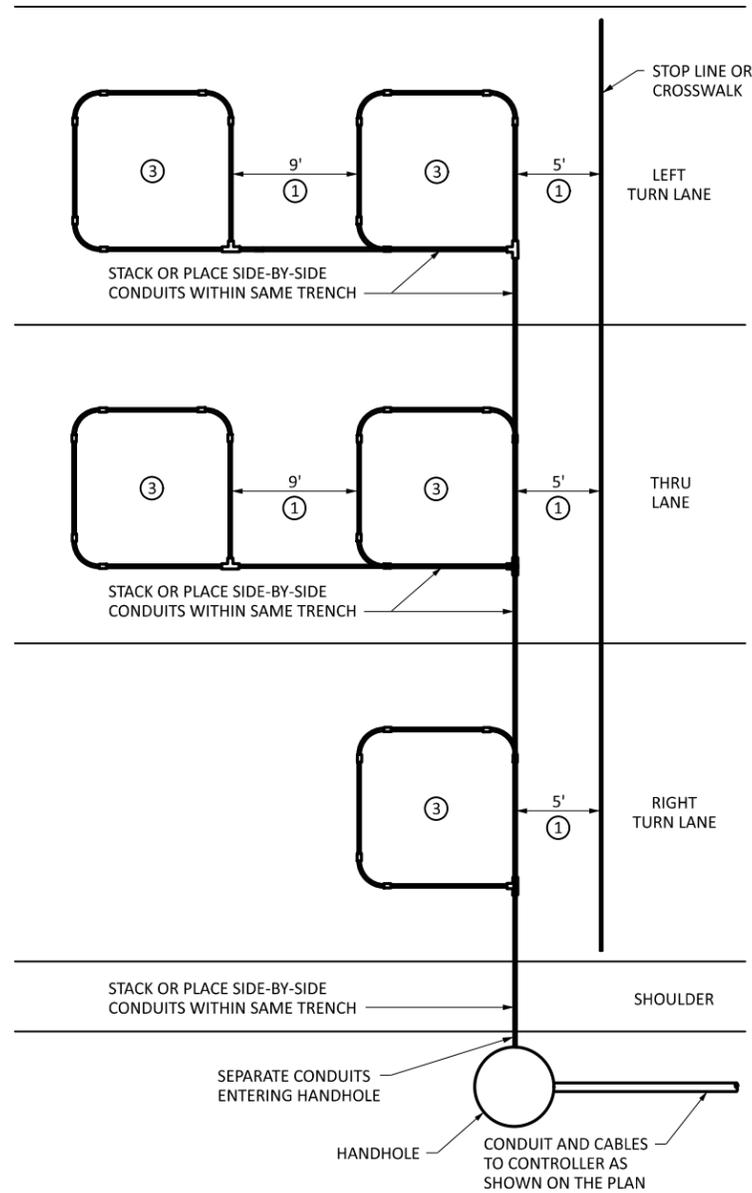

RIGID PVC LOOP DETECTOR PLACEMENT DETAIL

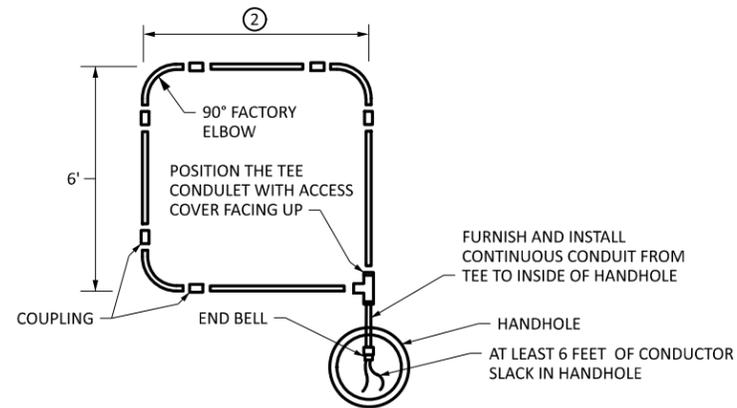

PREFORMED RIGID PVC LOOP DETECTOR DETAIL

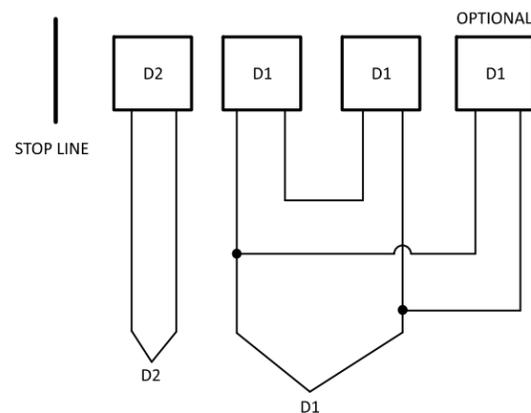


MULTIPLE LOOP SERIES HOOKUP DETAIL

NOTES:

- FURNISH AND INSTALL 3/4" CONDUIT AND FITTINGS.
- ASSEMBLE THE PREFORMED RIGID PVC CONDUIT LOOP DETECTOR AS SHOWN IN THE DETAIL.
- USE PRIMER AND PVC SOLVENT CEMENT MADE FOR JOINING RIGID PVC CONDUIT AND FITTINGS.
- ATTACH A FERROUS METAL ITEM IN OR ADJACENT TO THE TEE CONDULET COVER OR AS APPROVED BY THE ENGINEER.
- SLOPE CONDUITS FROM THE TEE CONDULETS TOWARDS THE HANDHOLE.
- LOOP DETECTOR CONDUITS TO THE HANDHOLE MAY BE PLACED WITHIN THE SAME TRENCH.


- ① USE DIMENSION SHOWN ON THE PLAN.
- ② DIMENSION ACCORDING TO LOOP SIZE SHOWN ON THE PLAN.
- ③ CENTER RIGID PVC LOOP DETECTOR IN THE LANE.

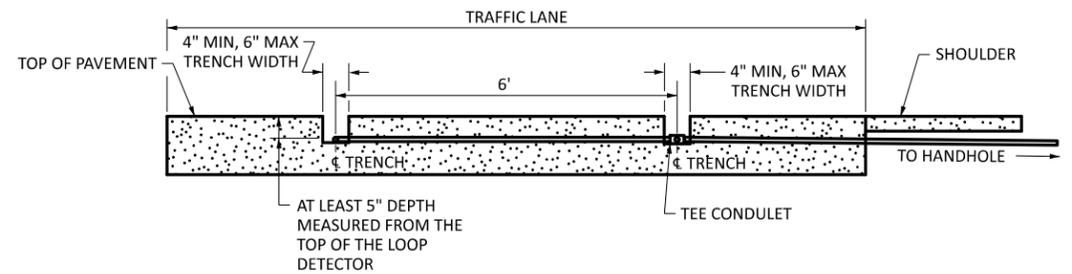

LOOP DETECTOR PLACEMENT IN EXISTING PAVEMENT

NOTES:

- FURNISH AND INSTALL THE SAME LOOP DETECTOR USED TO TRACE OUT THE SPECIFIC LOCATION ON THE PAVEMENT TO ASSURE A PROPER FIT IN THE TRENCH.
- MILL BEYOND THE LOOP DETECTOR PAVEMENT MARKINGS TO ACHIEVE FULL TRENCH DEPTH OF THE LOOP DETECTOR.
- BEFORE APPLYING THE TACK COAT, REMOVE DEBRIS AND FOREIGN MATTER FROM THE TRENCH AND USE COMPRESSED AIR TO CLEAN AND DRY THE TRENCH.
- APPLY A BITUMINOUS TACK COAT IN ACCORDANCE WITH SPEC. 2357 TO THE BOTTOM OF A CLEAN AND DRY TRENCH.
- BACKFILL THE LOOP DETECTOR TRENCHES WITH A PLANT-MIXED ASPHALT IN ACCORDANCE WITH SPEC 2360, UNLESS OTHERWISE APPROVED BY THE ENGINEER TO USE AN ALTERNATE MIXTURE TYPE.
- BACKFILL THE TRENCH WITH THE REQUIRED MIXED ASPHALT IN AT LEAST TWO COMPACTED LIFTS. BEFORE COMPACTING THE FIRST LIFT OF MIXED ASPHALT, ENSURE THERE IS AN ADEQUATE AMOUNT OF MIX ON THE SIDES AND ABOVE THE LOOP DETECTORS TO PREVENT DAMAGE DURING COMPACTION. USE "ORDINARY COMPACTION" METHOD IN ACCORDANCE WITH SPEC 2560.3D.2 FOR EACH LIFT. LEAVE 1/4" TO 1/2" COMPACTED MIXED ASPHALT IN THE TRENCH ABOVE THE EXISTING PAVEMENT TO ALLOW FOR ADDITIONAL COMPACTION BY TRAFFIC.
- FILL THE TRENCH WITH PACKAGED, DRY, NON-SHRINK, RAPID-HARDENING, CEMENT MATERIAL FOR CONCRETE REPAIRS LISTED ON MnDOT'S APL UNDER "CONCRETE PRODUCTS."
- MILLING IS REQUIRED FOR RIGID PVC LOOP INSTALLATIONS. WHEN MILLING INTO EXISTING SURFACE THAT WILL BE OVERLAYED WITH BITUMINOUS, MILL THE TRENCH DEPTH NO LESS THAN THE HIGHEST LOOP DETECTOR IN THE TRENCH.
- CONCRETE UNDER THE EXISTING BITUMINOUS SURFACE MAY BE ENCOUNTERED DURING MILLING OPERATIONS.

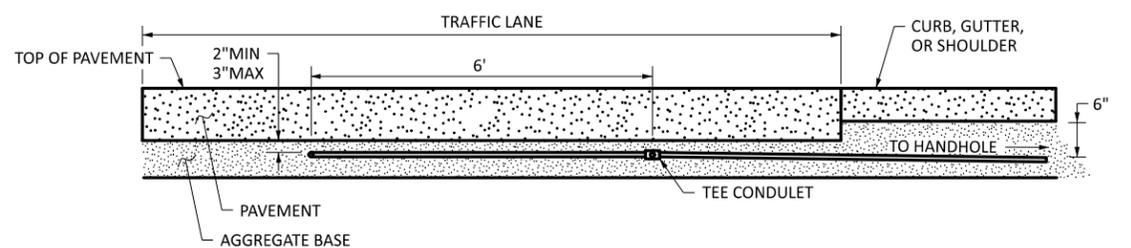

LOOP DETECTOR PLACEMENT IN NEW PAVEMENT

NOTES:

- OBTAIN THE REQUIRED COMPACTION OF THE AGGREGATE BASE AFTER PLACEMENT OF LOOP DETECTOR AND LEAD-IN CONDUIT.
- PLACE THE LOOP DETECTORS INTO THE AGGREGATE BASE 2" MINIMUM TO 3" MAXIMUM, MEASURED FROM THE TOP OF THE AGGREGATE BASE TO THE TOP OF THE LOOP DETECTOR AND LEAD-IN CONDUIT.

LEAD EXPERT OFFICE
BRIAN SORENSON
STATE TRAFFIC ENGINEER
OFFICE OF TRAFFIC ENGINEERING

PREFORMED RIGID PVC CONDUIT LOOP DETECTORS

APPROVED:
10-04-2024

THOMAS STYRBICKI
STATE DESIGN ENGINEER

STANDARD PLAN
5-297.874

1 OF 1




STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

APS PUSHBUTTON STATION

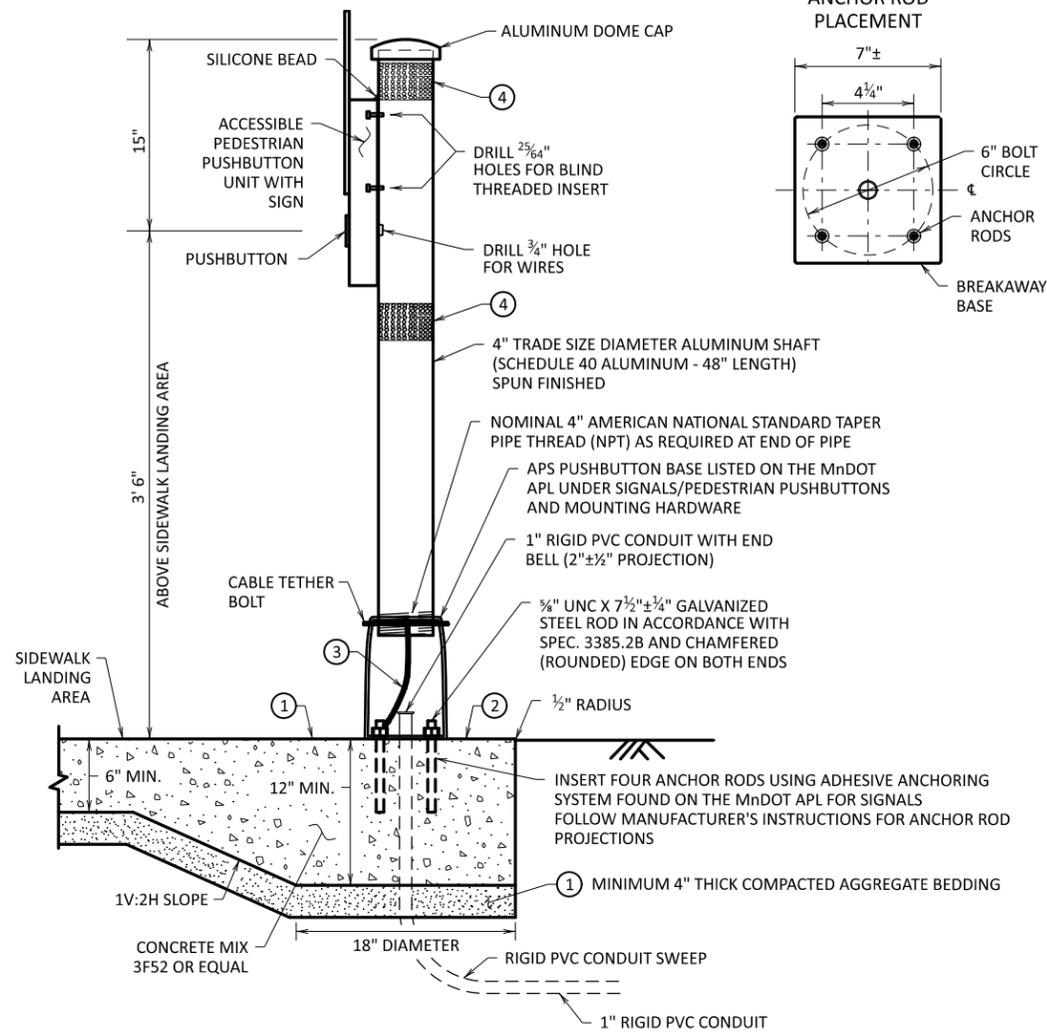


NOTES:

- ⑤ POSITION THE FACE OF THE PUSHBUTTON PARALLEL WITH THE OUTSIDE EDGE OF THE CROSSWALK.
- ⑥ CONSTRUCT A MINIMUM 4'x4' LANDING AREA ADJACENT TO EACH PUSHBUTTON, WITH A 2% MAXIMUM SLOPE IN ALL DIRECTIONS.
- ⑦ POSITION PUSHBUTTONS WITHIN 5' OF THE OUTSIDE EDGE OF THE CROSSWALK. DISTANCE IS MEASURED PERPENDICULARLY FROM EXTENSION OF CROSSWALK.
- ⑧ POSITION PUSHBUTTONS BETWEEN 1.5' AND 10' FROM THE BACK OF CURB OR EDGE OF ROADWAY, MEASURED IN THE DIRECTION OF TRAVEL. STANDALONE PUSHBUTTON STATIONS SHOULD BE 4' MINIMUM FROM THE BACK OF CURB TO AVOID KNOCKDOWNS.
- ⑨ POSITION PUSHBUTTONS AT LEAST 10' APART (PUSHBUTTON FACE TO PUSHBUTTON FACE).
- ⑩ PROVIDE A MAINTENANCE ACCESS ROUTE (MAR) WHEREVER POSSIBLE FOR SNOW REMOVAL PURPOSES. A MAR REQUIRES A 6' MINIMUM CLEAR DISTANCE FOR SIDEWALKS (10' FOR SHARED-USE PATHS) BETWEEN A PUSHBUTTON AND ANY OBSTRUCTIONS, INCLUDING BUILDINGS, V-CURB, ELECTRICAL FOUNDATIONS, SIGNAL CABINETS, OR ANOTHER PUSHBUTTON.
- ⑪ POSITION PUSHBUTTON 2' MINIMUM FROM CURB RAMP GRADE BREAK AND BACK OF SIDEWALK.
- ⑫ CONSTRUCT AN 8%-10% WALKABLE CONCRETE FLARE WHEN THE PUSHBUTTON IS OFFSET FROM THE EDGE OF THE CROSSWALK SO USERS DEPARTING FROM THE PUSHBUTTON WILL TRAVERSE A CONCRETE SURFACE.

APS PEDESTRIAN PUSHBUTTON LOCATION


| SIGNAL CONTROL POINTS | | | DISTANCE TO FRONT OF LANDING (FT) | DISTANCE TO BACK OF LANDING (FT) |
|-----------------------|---|---|-----------------------------------|----------------------------------|
| SIGNAL NO. | X | Y | | |
| PB2-1 | - | - | A | B |
| PB4-2 | - | - | C | D |

- A - DISTANCE MEASURED FROM THE PUSHBUTTON TO THE FRONT OF LANDING/TOP OF RAMP
- B - CLEAR DISTANCE MEASURED FROM THE PUSHBUTTON TO THE BACK OF LANDING/EDGE OF WALK
- C - DISTANCE MEASURED FROM THE PUSHBUTTON TO THE OUTSIDE EDGE OF DOMES IN THE DIRECTION OF TRAVEL
- D - CLEAR DISTANCE FROM THE PUSHBUTTON TO THE BACK OF LANDING MEASURED IN THE OPPOSITE DIRECTION OF TRAVEL

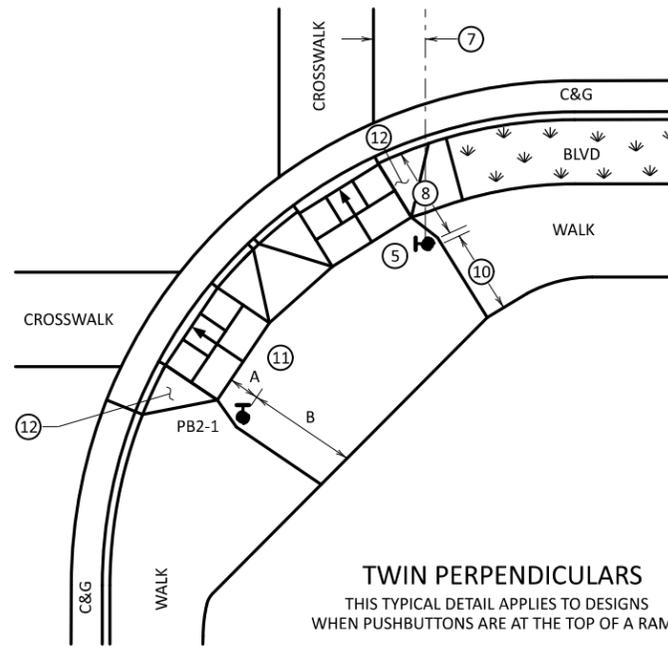

TWIN PERPENDICULARS

THIS TYPICAL DETAIL APPLIES TO DESIGNS WHEN PUSHBUTTONS ARE AT THE TOP OF A RAMP

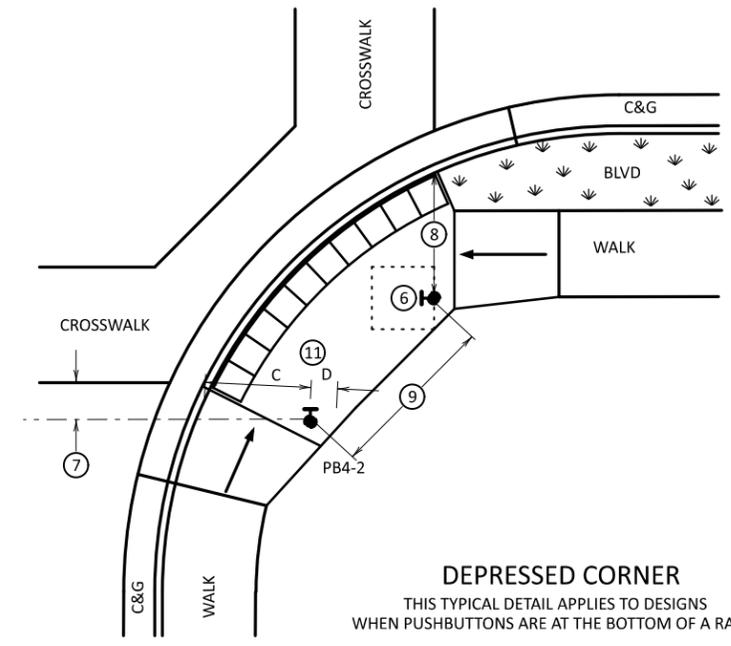

DEPRESSED CORNER

THIS TYPICAL DETAIL APPLIES TO DESIGNS WHEN PUSHBUTTONS ARE AT THE BOTTOM OF A RAMP

NOTES:

MOUNT THE BUTTON SO THAT THE FACE IS PARALLEL WITH THE ASSOCIATED CROSSWALK. SCREW IN SHAFT TO A TIGHTENED POSITION BEFORE MOUNTING ACCESSIBLE PEDESTRIAN PUSHBUTTON UNIT TO THE SHAFT.

ORIENT THE BASE ACCESS OPENING DIRECTLY BELOW THE APS BUTTON.


PLUMB AND LEVEL APS PUSHBUTTON STATIONS, AND TIGHTEN ANCHOR RODS IN ACCORDANCE WITH CONTRACT DOCUMENTS.

FURNISH AND INSTALL BLIND THREADED INSERTS USING MANUFACTURER'S SPECIFIC INSERTION TOOL.


USE APS 1/4"-20 STAINLESS STEEL MOUNTING BOLTS. APPLY BRUSH-ON ANTI-SEIZE COMPOUND TO BOLTS BEFORE ASSEMBLY.

APPLY A BEAD OF 100% SILICONE SEALANT ALONG THE TOP OF THE PUSHBUTTON UNIT WHERE IT CONTACTS THE 4" SHAFT.


- ① THE PUSHBUTTON STATION FOUNDATION IS MONOLITHIC (POURED AT ONE TIME) WITH THE SIDEWALK. PROVIDE A 1V:2H SLOPE GRADE WHERE THE 6" MINIMUM SIDEWALK DEPTH TRANSITIONS TO THE 12" MINIMUM FOUNDATION DEPTH. MAINTAIN THE COMPACTED AGGREGATE BEDDING AND THICKNESS USED FOR THE SIDEWALK THROUGHOUT THE SLOPE AND FOUNDATION GRADING. PROVIDE 1V:2H SLOPE GRADING 360 DEGREES FOR THE TRANSITION FROM THE SIDEWALK TO THE FOUNDATION WHEN THE FOUNDATION IS NOT LOCATED NEAR EDGE OF SIDEWALK AND IS SURROUNDED BY CONCRETE WALK.
- ② ENSURE CONCRETE CONTROL JOINTS AND EDGE OF CONCRETE WALK ARE A MINIMUM OF 9" FROM THE CENTER OF THE PUSHBUTTON FOUNDATION.
- ③ FURNISH AND INSTALL THE MANUFACTURER-PROVIDED CABLE TETHER ASSEMBLY IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- ④ FURNISH AND INSTALL 3" WIDE TUBULAR DELINEATOR/MARKER SHEETING FROM MnDOT'S APL FOR SIGNING/SHEETING MATERIALS THAT MATCHES THE COLOR OF THE NEAREST EDGE LINE.

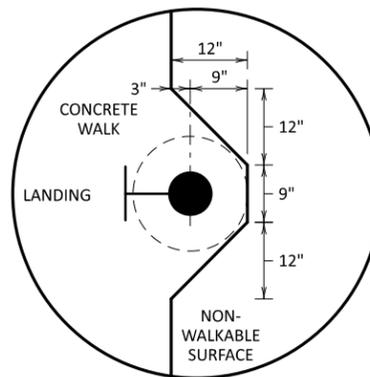

PUSHBUTTON STATION FOUNDATION FORMING

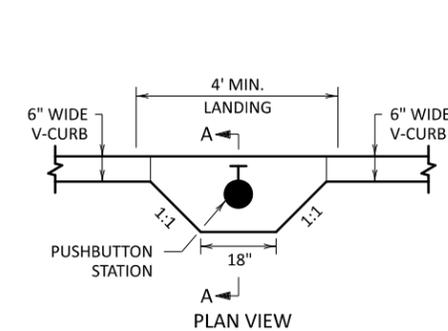

INTEGRAL PUSHBUTTON STATION WITH V-CURB

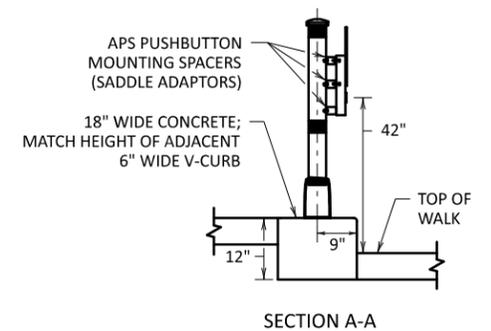

LEAD EXPERT OFFICE
JEFF PERKINS
ASSISTANT DIVISION DIRECTOR
OPERATIONS DIVISION



**ACCESSIBLE PEDESTRIAN SIGNAL (APS)
PUSHBUTTON STATION AND LOCATION**

APPROVED: 02-21-2024
REVISED:

THOMAS STYRBICKI
STATE DESIGN ENGINEER

**STANDARD PLAN
5-297.885**

1 OF 2

STANDARD PLAN

STATE PROJ. NO.
TRUNK HWY.

SHEET NO.
TOTAL SHEETS

